
Recommended PCB Layout
(top view)

DETAIL A

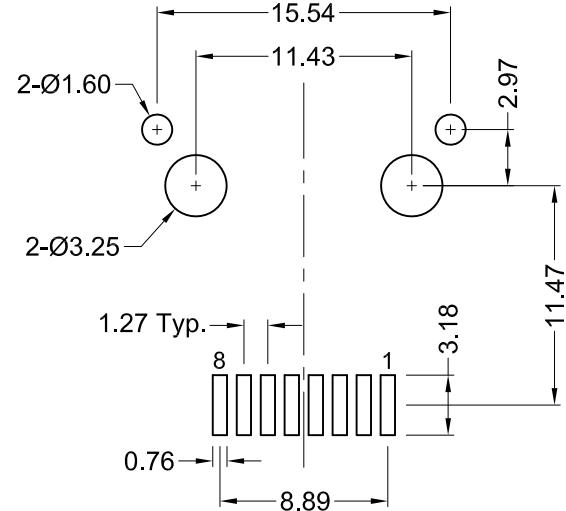

Part Number	Plating	Packaging
GMX-SMT2-S7-88	Flash	Bulk
GMX-SMT2-S7-88-50	50u"	Bulk
GMX-SMT2-S7-88-TR	Flash	Tape&Reel
GMX-SMT2-S7-8850TR	50u"	Tape&Reel

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	07/14/05	New Drawing	R. Aguirre	H. MA	R. Aguirre	05/24/05
A2	03/06/08	ECO #08-030	R. Aguirre	H. MA		
A3	04/27/10	ECO #10-020	S. Vien	H. MA		
A4	08/20/12	ECO #12-027	S. Vien	P. DalCanto		
A5	11/06/13	ECO #13-084	W. Cook	H. MA		

GMX-SMT2-S7-88

RoHS COMPLIANT
EU Directive 2002/95/EC

E134345



Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise

Right Angle Modular Jack, RoHS Compliant

8 contacts, Surface Mount, Shielded

**Materials and Finish**

Housing Material:
high temp. thermoplastic,
(reflow process compatible)
UL 94V-0 rated, black color

Design meets UL 1863 Sec. 8
Electrical Probe and Sec. 20
Child Finger test requirements

Contact Material: phosphor bronze

Contact Plating Options:
Standard: 0.0001" Nickel Plating, Selective Plating Gold Flash on Contact Area, Tin on Termination End

50: 0.0001" Nickel Plating, Selective Plating 0.000050" Gold on Contact Area to Comply with FCC Requirements Under No. 47 C.F.R. Part 68, Subpart F, Tin on Termination End

Electrical Characteristics

Current Rating: 1.0 Amps
Current Voltage: 125V DC

Insulation Resistance:
500 Megohms min.

Dielectric Withstanding Voltage:
1000V rms, 60Hz

Contact Resistance:
20 milliohms max.

Durability Rating:
1000 mating cycles min.

Operating Temperature:
-40°C to +85°C

Electrical Performance

Category 5 100MHz Bandwidth Performance
Performance meets near end crosstalk (NEXT) Requirements of -40dB @ 100MHz per EIA/TIA 568A in applications where UL Approved Category 5 cable (GA27-3773-1) is used

Shielded types offer 20dB shielding from 30MHz to 300MHz

Operating Temperature
-40°C to +85°C

Reflow Temperature
230°C for 30 seconds, 260°C max.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kycon](#):

[GM-SMT2-S7-88-50](#)