

# General Specifications

## B Electrical Capacity (Resistive Load)

|                                              |                                                                                                                             |
|----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| <b>Power Level (silver):</b>                 | 6A @ 125V AC & 3A @ 250V AC<br>4A @ 30V DC for On-None-On; 3A @ 30V DC for all other circuits                               |
| <b>Logic Level (gold):</b>                   | 0.4VA maximum @ 28V AC/DC maximum<br>(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)                                           |
| <b>Logic/Power Level (gold over silver):</b> | Combines silver & gold ratings<br>Note: Find additional explanation of dual rating & operating range in Supplement section. |

## Other Ratings

|                               |                                                                                                                                   |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>Contact Resistance:</b>    | 10 milliohms maximum for silver; 20 milliohms maximum for gold                                                                    |
| <b>Insulation Resistance:</b> | 1,000 megohms minimum @ 500V DC                                                                                                   |
| <b>Dielectric Strength:</b>   | 1,000V AC minimum between contacts for 1 minute minimum;<br>1,500V AC minimum between contacts and case for 1 minute minimum      |
| <b>Mechanical Life:</b>       | 50,000 operations minimum                                                                                                         |
| <b>Electrical Life:</b>       | 25,000 operations minimum for silver; 50,000 operations minimum for gold;<br>50,000 operations minimum for silver at 3A @ 125V AC |
| <b>Angle of Throw:</b>        | 25°                                                                                                                               |

## Materials & Finishes

|                                            |                                                                                                                          |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>Actuator Clip &amp; Mounting Frame:</b> | Stainless Steel                                                                                                          |
| <b>Body Frame:</b>                         | Stainless steel                                                                                                          |
| <b>Case:</b>                               | Diallyl phthalate resin (UL94V-0)                                                                                        |
| <b>Movable Contactor:</b>                  | Phosphor bronze with silver or gold plating                                                                              |
| <b>Movable Contacts:</b>                   | Silver alloy (code W); copper with gold plating (code G); or silver alloy with gold plating (code A)                     |
| <b>Stationary Contacts:</b>                | Silver with silver plating (code W); copper or brass with gold plating (code G);<br>or silver with gold plating (code A) |
| <b>Terminals:</b>                          | Copper or brass with silver plating; or copper or brass with gold plating                                                |

## Environmental Data

|                              |                                                                                                                                              |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operating Temp Range:</b> | -30°C through +85°C (-22°F through +185°F)                                                                                                   |
| <b>Humidity:</b>             | 90 ~ 95% humidity for 96 hours @ 40°C (104°F)                                                                                                |
| <b>Vibration:</b>            | 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours |
| <b>Shock:</b>                | 50G (490m/s <sup>2</sup> ) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)                               |

## Processing

|                   |                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Soldering:</b> | Wave Soldering (PC version) for Gold: See Profile A in Supplement section.<br>Manual Soldering for Gold: See Profile A in Supplement section.<br>Wave Soldering (PC version) for Silver: See Profile B in Supplement section.<br>Manual Soldering for Silver: See Profile B in Supplement section.<br>Note: Actuator must be in OFF (center) position while soldering. |
| <b>Cleaning:</b>  | These devices are not process sealed. Hand clean locally using alcohol based solution.                                                                                                                                                                                                                                                                                 |

## Standards & Certifications

|                                |                                                                                                                                                                                                                                                        |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Flammability Standards:</b> | UL94V-0 for case                                                                                                                                                                                                                                       |
| <b>UL:</b>                     | <b>File No. E44145 - Recognized only when ordered with marking on switch.</b><br>Add "/U" before first dash in part number to order UL recognized switch.<br>All models recognized at 6A @ 125V AC, 3A @ 250V AC or 0.4VA maximum @ 28V DC maximum.    |
| <b>CSA:</b>                    | <b>File No. 023535_0_000 - Certified only when ordered with marking on switch.</b><br>Add "/C" before first dash in part number to order CSA certified switch.<br>All models certified at 6A @ 125V AC or 3A @ 250V AC or 0.4VA maximum @ 28V maximum. |

# Distinctive Characteristics

Three methods of panel mounting: flat frame for flush with face or subpanel, snap-in, and PCB.

High insulating barriers increase isolation of circuits in multipole devices and provide added protection to contact points.


The molded diallyl phthalate case has a UL 94V-0 flammability rating.

Epoxy sealed terminals prevent entry of solder flux and other contaminants.



Prominent external insulating barriers increase insulation resistance and dielectric strength.

Bias guard prevents misalignment of contacts; interlocking of actuator block with rocker and internal guide does not allow transmission of diagonal force on rocker to reach contact mechanism.

Clinching of the frame to the case well above the base and terminals provides 1,500V dielectric strength.

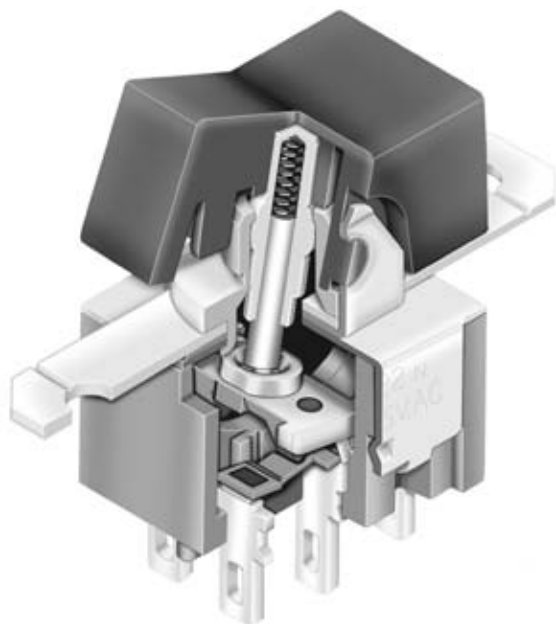


Actual Size

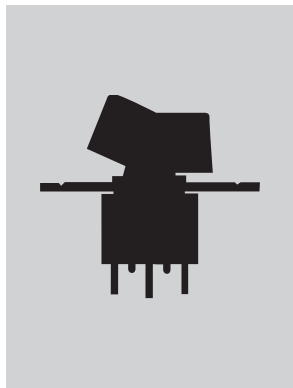


Snap-in Mount

Page B64



Bracket PC Mount

Page B72



Flat Frame Mount

Page B83

### TYPICAL SWITCH

Toggles

Rockers **B**

Pushbuttons

Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles


Tilt

Touch

Indicators


Accessories

Supplement

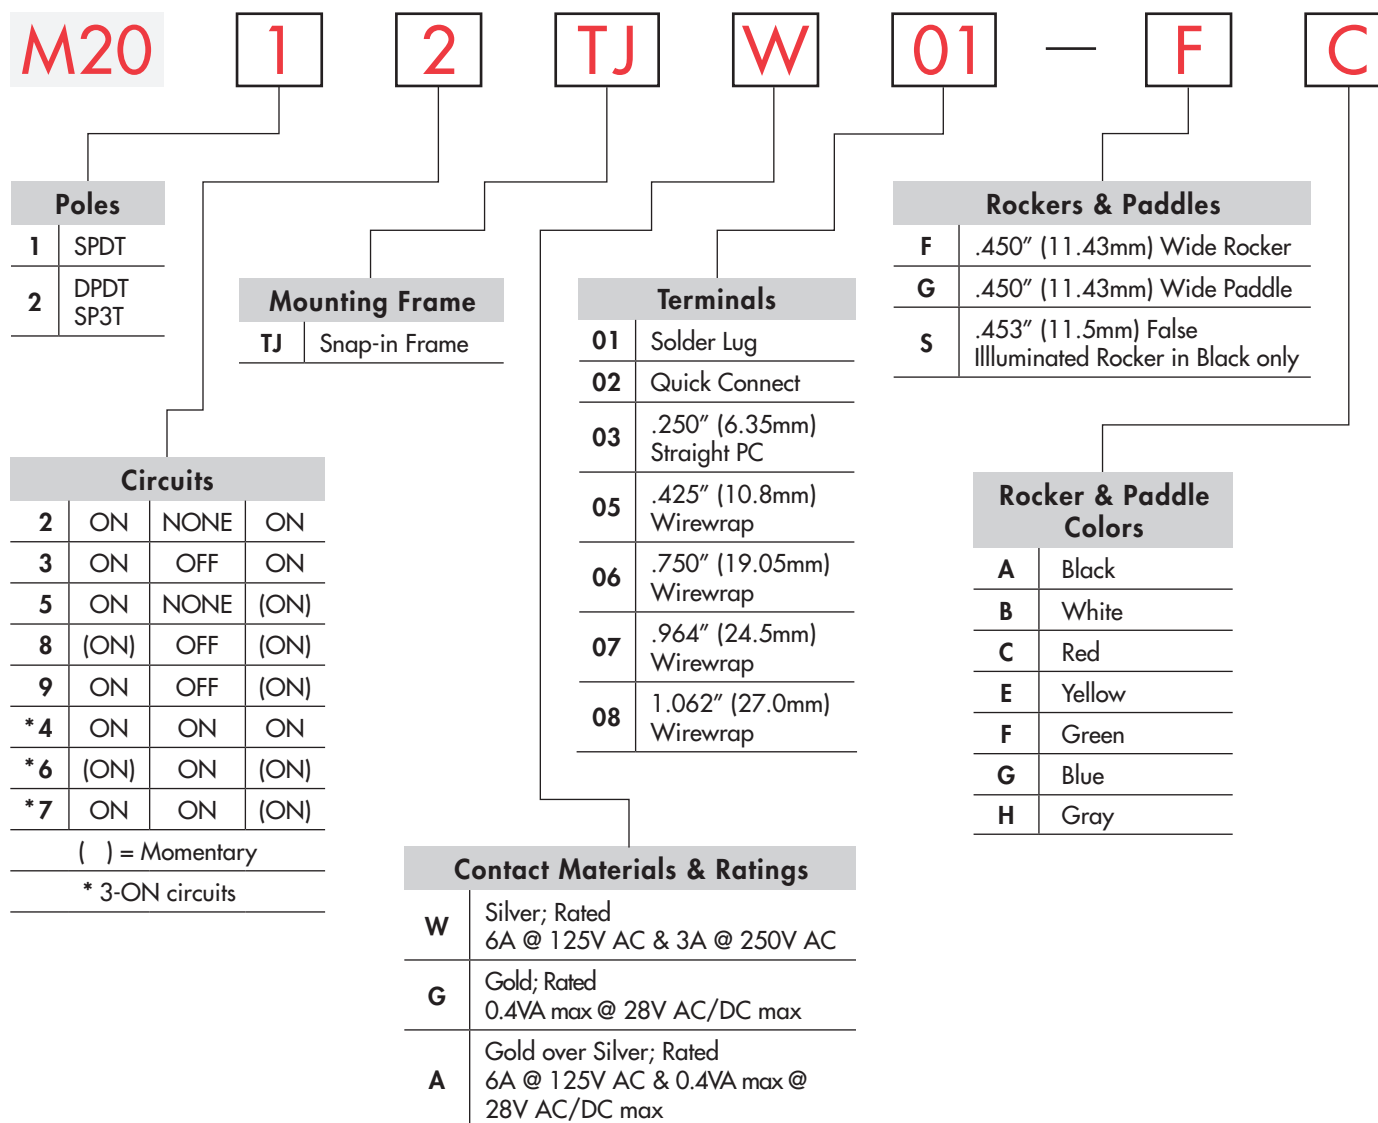


### DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

**M2012TJW01-FC-1A**

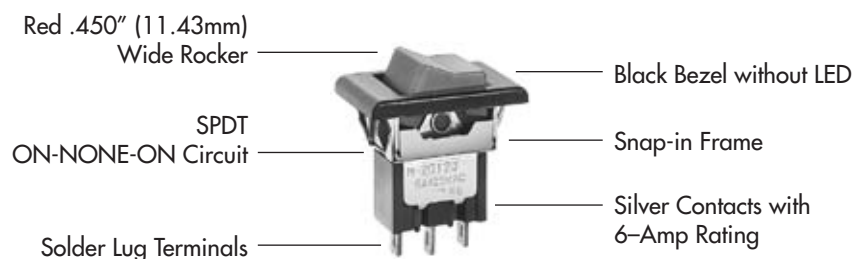

ORDERING EXAMPLE

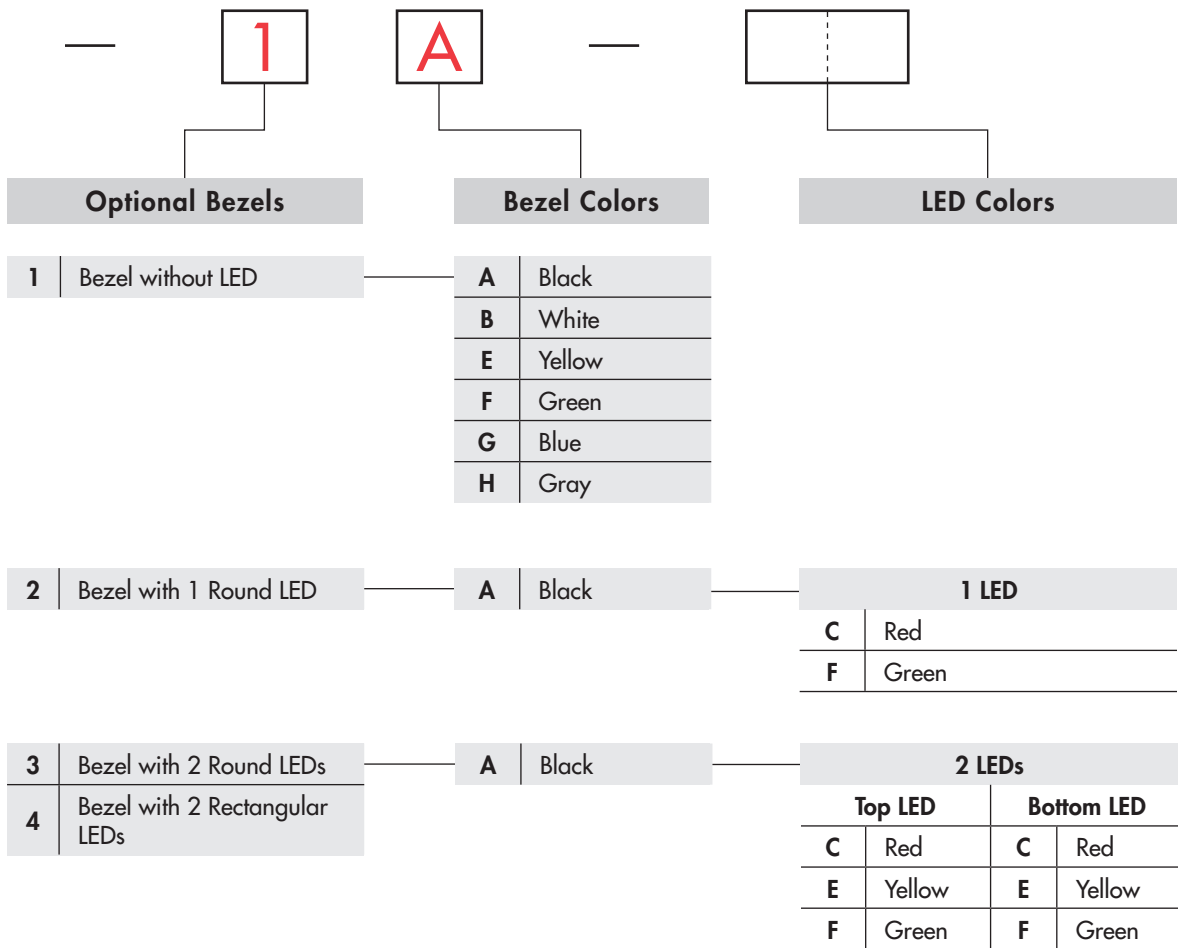


IMPORTANT:




Switches are supplied without UL & CSA marking unless specified.  
**UL & CSA recognized only when ordered with marking on the switch.**  
Specific models, ratings, & ordering instructions are noted on the General Specifications page.

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE





**M2012TJW01-FC-3A-CF**

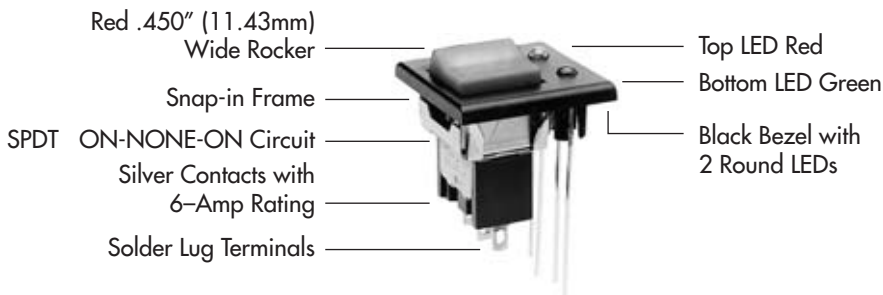

## POLES &amp; CIRCUITS

| Pole | Model | Rocker Position<br>( ) = Momentary |        |      | Connected Terminals |        |         | Throw & Schematics                                                                          |
|------|-------|------------------------------------|--------|------|---------------------|--------|---------|---------------------------------------------------------------------------------------------|
|      |       | Down                               | Center | Up   | Down                | Center | Up      |                                                                                             |
| SP   | M2012 | ON                                 | NONE   | ON   |                     |        |         | SPDT<br> |
|      | M2013 | ON                                 | OFF    | ON   |                     |        |         |                                                                                             |
|      | M2015 | ON                                 | NONE   | (ON) | 2-3                 | OPEN   | 2-1     |                                                                                             |
|      | M2018 | (ON)                               | OFF    | (ON) |                     |        |         |                                                                                             |
|      | M2019 | ON                                 | OFF    | (ON) |                     |        |         |                                                                                             |
| DP   | M2022 | ON                                 | NONE   | ON   |                     |        |         | DPDT<br> |
|      | M2023 | ON                                 | OFF    | ON   |                     |        |         |                                                                                             |
|      | M2025 | ON                                 | NONE   | (ON) | 2-3 5-6             | OPEN   | 2-1 5-4 |                                                                                             |
|      | M2028 | (ON)                               | OFF    | (ON) |                     |        |         |                                                                                             |
|      | M2029 | ON                                 | OFF    | (ON) |                     |        |         |                                                                                             |


## For 3 Throw (3-On)

|      |       | Connected Terminals & Schematic                                                                   |                                                                                                   |                                                                                                    | External Connection                                                                                                                                                                                        |
|------|-------|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pole | Model | Down                                                                                              | Center                                                                                            | Up                                                                                                 |                                                                                                                                                                                                            |
| SP   | M2024 | ON                                                                                                | ON                                                                                                | ON                                                                                                 | <p>The SP3T model utilizes a double pole base.</p> <p>External connection must be made during field installation.</p>  |
|      | M2026 | (ON)                                                                                              | ON                                                                                                | (ON)                                                                                               |                                                                                                                                                                                                            |
|      | M2027 | ON                                                                                                | ON                                                                                                | (ON)                                                                                               |                                                                                                                                                                                                            |
|      |       |  <p>2-3 5-6</p> |  <p>2-3 5-4</p> |  <p>2-1 5-4</p> |                                                                                                                                                                                                            |


## MOUNTING FRAME

TJ


## Snap-in Frame

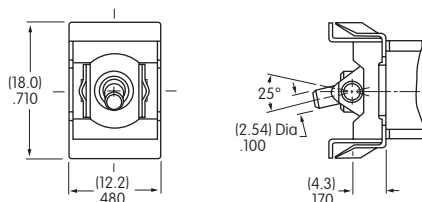

Panel Cutout for Single Pole without Bezel



Panel Cutout for Double Pole without Bezel



Panel Thickness without Bezel: .039" ~ .126" (1.0mm ~ 3.2mm)

Panel Thickness with Bezel: .039" ~ .098" (1.0mm ~ 2.5mm)

## CONTACT MATERIALS &amp; RATINGS

W

Silver over Silver

Power Level

6A @ 125V AC &amp; 3A @ 250V AC

G

Gold over Brass or Copper

Logic Level

0.4VA maximum @ 28V AC/DC maximum

Note: See Supplement section to find complete explanation of operating range.

A

Gold over Silver

Power Level  
or Logic Level6A @ 125V AC  
or 0.4VA maximum @ 28V AC/DC maximum

Note: This dual rated option is suitable when two or more identical switches are used in logic and in power circuits within the same application. See Supplement section to find complete explanation of dual rating and operating range.

## TERMINALS

Toggles

**B** Rockers

Pushbuttons

Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt


Touch

Indicators


Accessories

Supplement



### 01 Solder Lug




### 02 .062" (1.57mm) Wide Quick Connect



### 03 .250" (6.35mm) Straight PC



Single Pole




Double Pole

### 05 .425" (10.8mm) Wirewrap or Extended PC

### 06 .750" (19.05mm) Wirewrap or Extended PC

### 07 .964" (24.5mm) Wirewrap or Extended PC

### 08 1.062" (27.0mm) Wirewrap or Extended PC



If using as extended PC terminal, refer to the above footprints.


Dimension A = terminal lengths as shown beside the terminal codes at the left.

## ROCKERS & PADDLES

### F AT4150 .450" (11.43mm) Wide Rocker

Material: Polyamide  
Finish: Matte


Colors Available:  
A, B, C, E, F, G, H



### G AT4151 .450" (11.43mm) Wide Paddle

Material: Polyamide  
Finish: Matte


Colors Available:  
A, B, C, E, F, G, H



### S AT466 .453" (11.5mm) False Illuminated Rocker

Material: Polycarbonate  
Finish: Glossy  
Colors: Black

False Illuminator  
Acrylonitrile Butadiene Styrene  
White and Red



When a bezel is selected with AT466, glossy polycarbonate AT207 is supplied.

Cap Colors Available:

**A**

Black

**B**

White

**C**

Red

**E**

Yellow

**F**

Green

**G**

Blue

**H**


Gray

### OPTIONAL SNAP-IN BEZELS & BEZEL COLORS

#### 1 AT2107 Bezel

Material: Polyamide

Finish: Matte



**A** Black


**B** White

**E** Yellow

**F** Green

**G** Blue

**H** Gray




|   | Single Pole       | Double Pole       |
|---|-------------------|-------------------|
| A | (12.5)mm<br>.492" | (13.1)mm<br>.516" |

#### 2 AT208 Bezel for AT070 LED

Material: Polycarbonate

Finish: Glossy


Contact factory for matte finish.

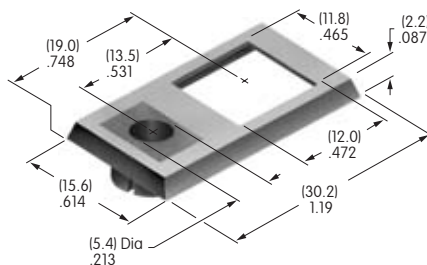

**A** Black

LED colors & specifications on next page.


|   | Single Pole       | Double Pole       |
|---|-------------------|-------------------|
| A | (12.5)mm<br>.492" | (13.1)mm<br>.516" |
| B | (6.25)mm<br>.246" | (6.55)mm<br>.258" |



#### 3 AT212 Bezel for AT617 LED

Material: Polycarbonate


Finish: Semi-glossy

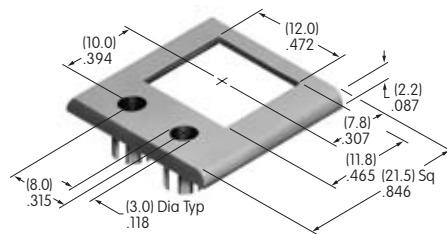

**A** Black

LED colors & specifications on next page.


|   | Single Pole       | Double Pole       |
|---|-------------------|-------------------|
| A | (18.4)mm<br>.724" | (18.7)mm<br>.736" |



#### 4 AT213 Bezel for AT618 LED

Material: Polycarbonate


Finish: Semi-glossy

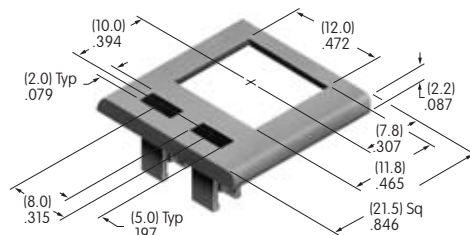

**A** Black


LED colors & specifications on next page.

|   | Single Pole       | Double Pole       |
|---|-------------------|-------------------|
| A | (18.4)mm<br>.724" | (18.7)mm<br>.736" |




### Bezel Assembly


1. Pry out tab on bezel to a 45° angle.




2. Insert switch frame under tab and snap on bezel.



3. Push tab back into place.




4. Snap assembled bezel and switch into panel.




## LED COLORS & SPECIFICATIONS


**AT070 LED**  
For Bezel AT208  
with 1 LED

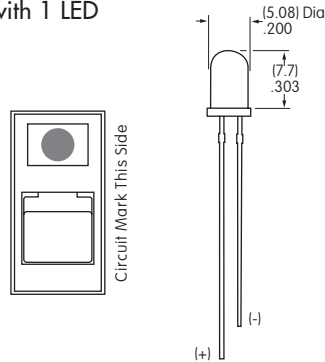

**AT617 LED**  
For Bezel AT212  
with 2 Round LEDs



**AT618 LED**  
For Bezel AT213  
with 2 Rectangular LEDs

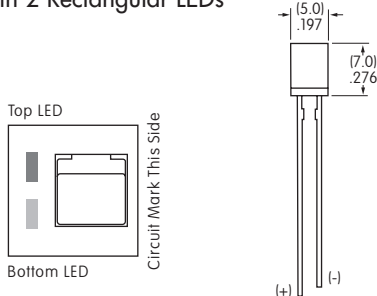

Note: Lead lengths may differ from manufacturing lot to lot. The longer lead is the anode (+).

|                                                    |              | AT070        |            | AT617        |            |            | AT618        |            |            |
|----------------------------------------------------|--------------|--------------|------------|--------------|------------|------------|--------------|------------|------------|
|                                                    |              | <b>C</b>     | <b>F</b>   | <b>C</b>     | <b>E</b>   | <b>F</b>   | <b>C</b>     | <b>E</b>   | <b>F</b>   |
|                                                    | Color        | Red          | Green      | Red          | Yellow     | Green      | Red          | Yellow     | Green      |
| Maximum Forward Current                            | $I_{FM}$     | 25mA         | 50mA       | 30mA         | 30mA       | 25mA       | 25mA         | 30mA       | 25mA       |
| Typical Forward Current                            | $I_F$        | 20mA         | 30mA       | 20mA         | 20mA       | 20mA       | 20mA         | 20mA       | 20mA       |
| Forward Voltage                                    | $V_F$        | 2.8V         | 2.1V       | 2.0V         | 2.1V       | 2.2V       | 2.25V        | 2.1V       | 2.2V       |
| Maximum Reverse Voltage                            | $V_{RM}$     | 4V           | 5V         | 5V           | 5V         | 5V         | 5V           | 5V         | 5V         |
| Current Reduction Rate Above 25°C                  | $\Delta I_F$ | 0.33 mA/°C   | 0.40 mA/°C | 0.40 mA/°C   | 0.40 mA/°C | 0.33 mA/°C | 0.33 mA/°C   | 0.40 mA/°C | 0.33 mA/°C |
| Ambient Temperature Range (when used with a bezel) |              | -10° ~ +70°C |            | -15° ~ +70°C |            |            | -25° ~ +70°C |            |            |

The electrical specifications shown are determined at a basic temperature of 25°C.  
LED circuit is independent of switch operation. LED is colored in OFF state.

If the source voltage is greater than the rated voltage of the LED, a ballast resistor must be connected in series with the lamp.  
The ballast resistor calculation and more lamp detail are shown in the Supplement section.

## LEGENDS

NKK Switches can provide custom legends for caps. Contact factory for more information.

### Suggested Printable Area for Cap


#### Recommended Print Method:

Pad Print

Epoxy based ink is recommended.



AT4150




Shaded areas are printable areas.





### TYPICAL SWITCH DIMENSIONS

#### Snap-in Frame • Solder Lug

#### Single Pole




M2012TJW01-FC


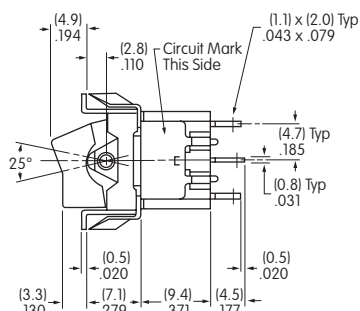


#### Snap-in Frame • Solder Lug

#### Double Pole




M2022TJW01-FC


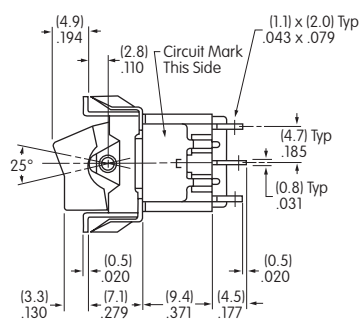


#### Snap-in Frame • Solder Lug

#### Single Pole




M2012TJW01-GC


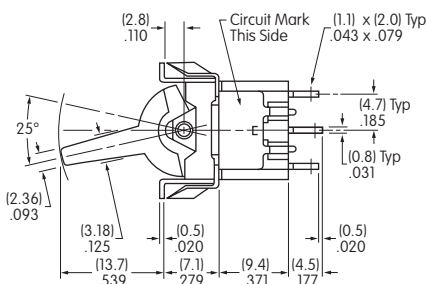


#### Snap-in Frame • Solder Lug

#### Double Pole




M2022TJW01-GC

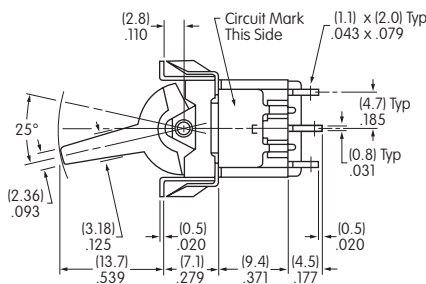

## TYPICAL SWITCH DIMENSIONS

### Single & Double Pole


### Snap-in Frame • AT2107 Bezel • Solder Lug

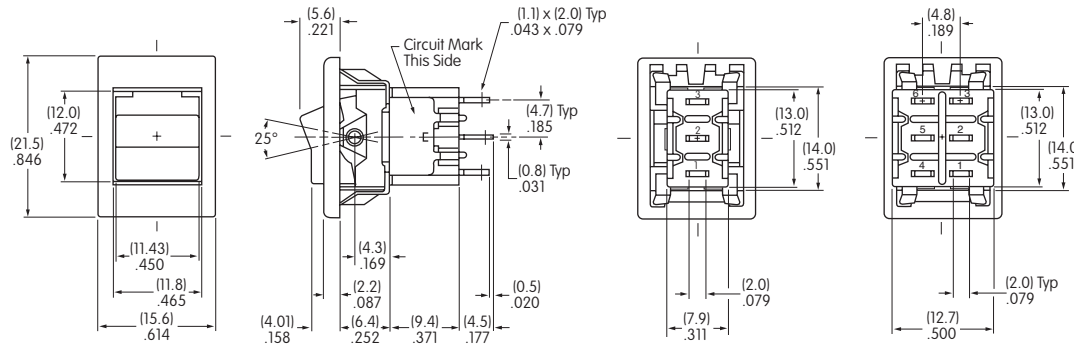

M2012TJW01-FC-1A

### Double Pole


### Snap-in Frame • AT208 Bezel • Solder Lug

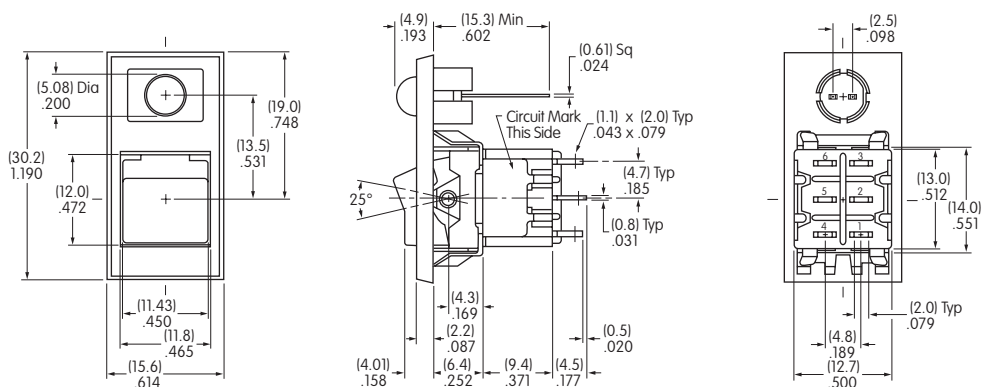

M2022TJW01-FC-2A-C

### Single Pole


### Snap-in Frame • AT212 Bezel • Solder Lug

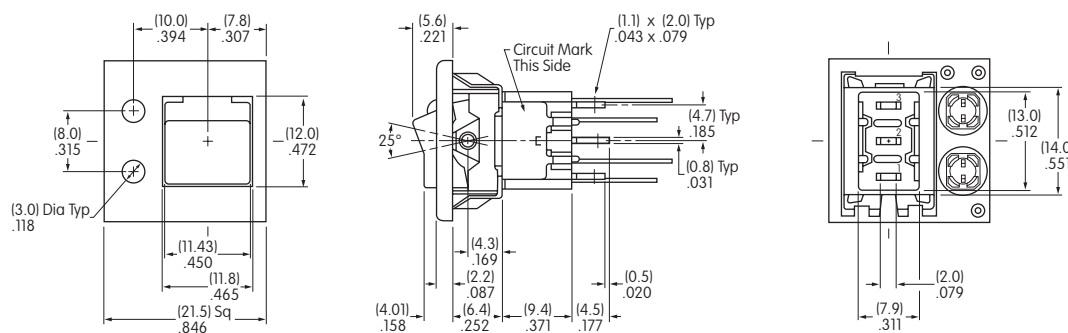

M2012TJW01-FC-3A-CF

### Double Pole

### Snap-in Frame • AT213 Bezel • Solder Lug

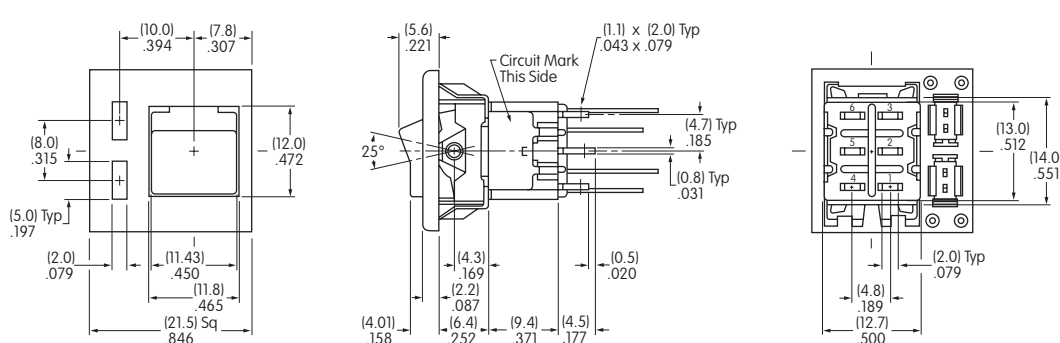

M2022TJW01-FC-4A-CF