

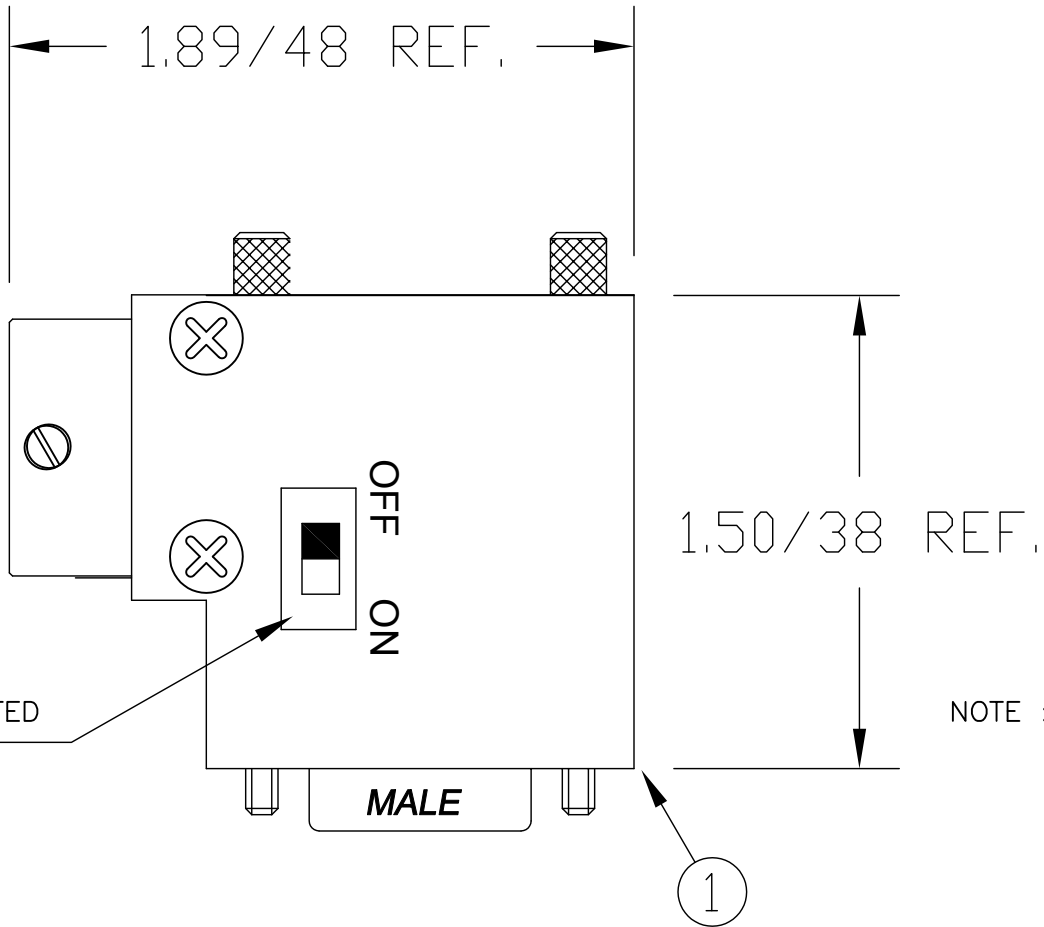


MATERIAL NUMBER	ENGINEERING NUMBER	PROGRAMMING PORT
120100-0003	MA9DP0-32	YES
120100-0004	MA9D00-32	NO

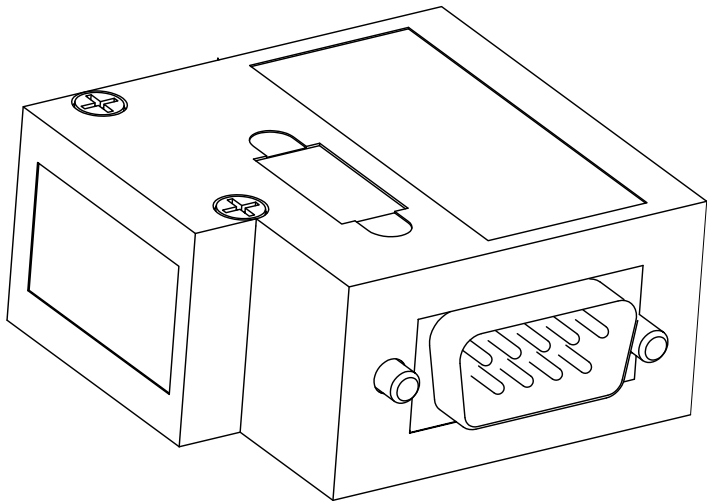


NOTE : UNIT IS SUPPLIED UN-TERMINATED
IE: - SWITCH IN OFF POSITION

DSUB WITHOUT PROGRAMMING PORT

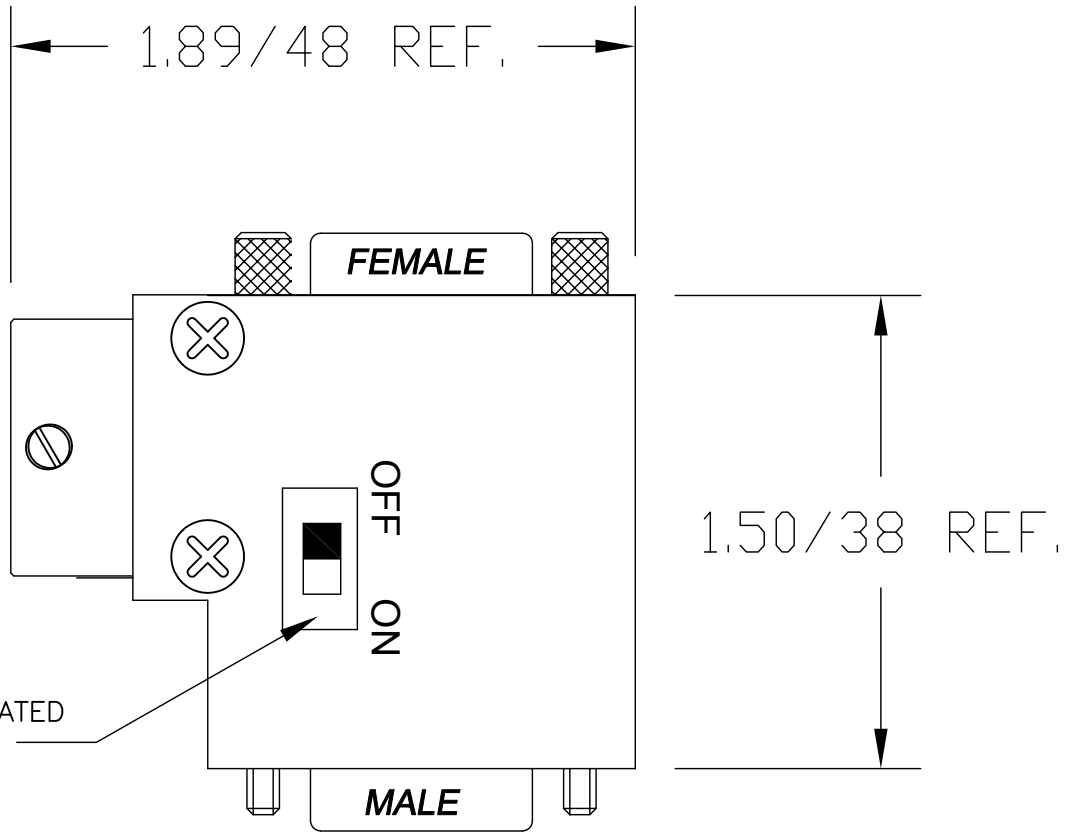


NOTE : UNIT IS SUPPLIED UN-TERMINATED
IE: - SWITCH IN OFF POSITION

DSUB WITH PROGRAMMING PORT

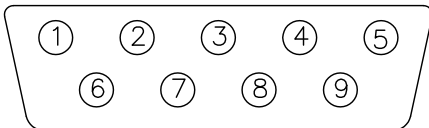

9 WAY D-SUB
MALE FACE VIEW

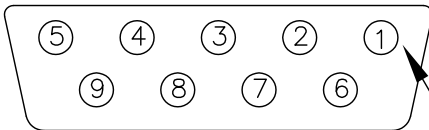

9 WAY D-SUB
FEMALE FACE VIEW

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	4 AMPS
PROTECTION FOR D-SUB	IP40
OPERATING TEMPERATURE - D-SUB	0°C TO 60°C

ITEM	COMPONENT	MATERIAL	FINISH
1	DSUB	ABS	BLACK
2	CONTACT	COPPER ALLOY	GOLD OVER NICKEL

RLSD DRAWING EC NO: WEU2010-0312 DRWN: BWOODMAN2010/01/28 CHKD: KJ APPR: JFMURPHY 2010/01/29	DESCRIPTION	QUALITY SYMBOL ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY	DATE	TITLE DSUB 9-PIN W/WO PROGRAMMING PORT ---- MOLEX INCORPORATED			
			4 PLACES	±---	±---	----					
			3 PLACES	±---	±.005	CHECKED BY	DATE				
			2 PLACES	±0.13	±.010	KJ	2010/01/29				
				1 PLACE	±0.25	±.020	APPROVED BY	DATE		DOCUMENT NO. SD-120100-003	
	ANGULAR ±1/2°			JFMURPHY	2010/01/29	SHEET NO. 1 OF 1					
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
	A	REV					SIZE C				