

MA3X791

Silicon epitaxial planar type

For super-high speed switching circuit
For small current rectification

■ Features

- Two MA3X786s are contained in one package (series connection)
- Allowing to rectify under ($I_{F(AV)} = 100 \text{ mA}$) condition
- Optimum for high-frequency rectification because of its short reverse recovery time (t_{rr})
- Low V_F (forward rise voltage), with high rectification efficiency

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$




Parameter		Symbol	Rating	Unit
Reverse voltage (DC)		V _R	30	V
Repetitive peak reverse voltage		V _{RRM}	30	V
Peak forward current	Single	I _{FM}	300	mA
	Series*2		200	
Average forward current	Single	I _{F(AV)}	100	mA
	Series*2		70	
Non-repetitive peak forward surge current*1		I _{FSM}	1	A
Junction temperature		T _j	125	°C
Storage temperature		T _{stg}	−55 to +125	°C

Note) *1 : The peak-to-peak value in one cycle of 50 Hz sine-wave (non-repetitive)
*2 : Value per chip

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse current (DC)	I_R	$V_R = 30 \text{ V}$			15	μA
Forward voltage (DC)	V_F	$I_F = 100 \text{ mA}$			0.55	V
Terminal capacitance	C_t	$V_R = 0 \text{ V}, f = 1 \text{ MHz}$		20		pF
Reverse recovery time*	t_{rr}	$I_F = I_R = 100 \text{ mA}$ $I_{rr} = 10 \text{ mA}, R_L = 100 \Omega$		2		ns

- Note) 1. Schottky barrier diode is sensitive to electric shock (static electricity, etc.). Due attention must be paid on the charge of a human body and the leakage of current from the operating equipment.
2. Rated input/output frequency: 250 MHz
3. *: t_{rr} measuring circuit

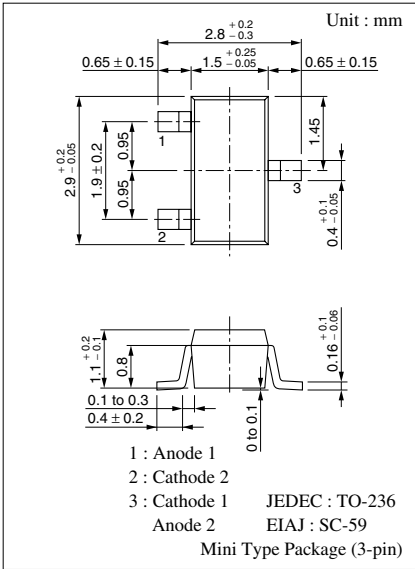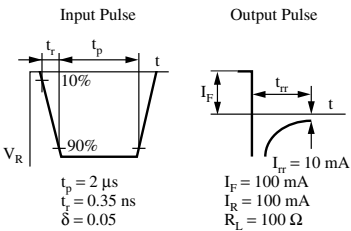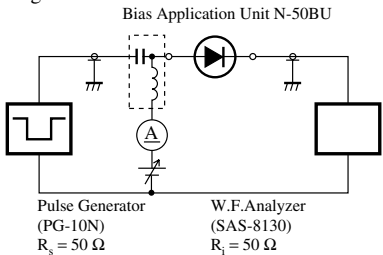

Marking Symbol: M4A

Internal Connection

