


Packages

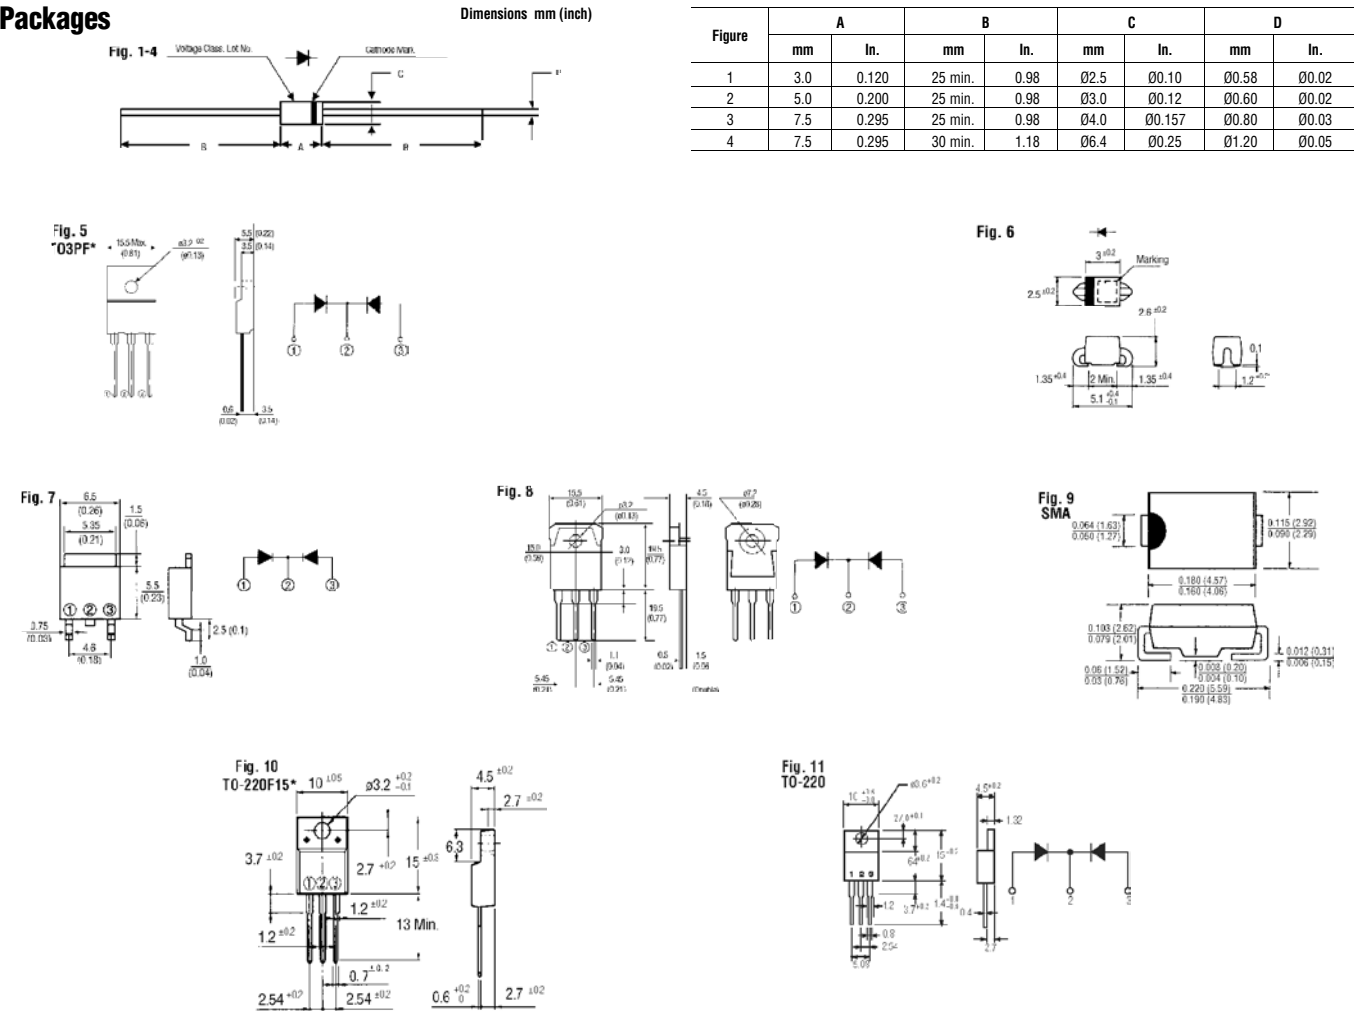

*Full molded package eliminates the need for isolating hardware and greatly reduces your cost as compared with mounting non-isolated package. Contact Allied for information on complete line availability on TO220 and TO3P devices.

13

Schottky Barrier Rectifiers

Mfr.'s Type	Fig.	Maximum Ratings		I _{RRM} ² Amps	Characteristics (T _a = 25°C) V _{RM} Max. Volts	I _{RRM} ² Max. mA
		V _{RRM} Volts	I _O ¹ Amps			
ERA82-004	1	45	0.60 (T _a = 60°C)	25	0.55 (I _F = 0.6 A)	1.0
ERA83-006	1	60	1.00 (T _i = 111°C)	30	0.58 (I _F = 1.0 A)	2.0
ERA81-004	2	45	1.00 (T _a = 25°C)	50	0.55 (I _F = 1.0 A)	2.0
ERA84-009	2	90	1.00 (T _a = 25°C)	30	0.90 (I _F = 1.0 A)	1.0
ERB81-004	4	45	2.00 (T _a = 25°C)	100	0.55 (I _F = 2.0 A)	5.0
ERC81-004	4	45	3.00 (T _a = 25°C)	120	0.55 (I _F = 3.0 A)	5.0
ERC815-004	4	45	5.00 (T _a = 25°C)	140	0.55 (I _F = 3.0 A)	5.0
ESAD83M-006	5	60	30.00 (T _c = 75°C)	200	0.58 (I _F = 12.5 A)	20.0
SC802-04	6	45	1.00 (T _i = 115°C)	40	0.55 (I _F = 1.0 A)	2.0
SC802-06	6	60	1.00 (T _i = 111°C)	30	0.58 (I _F = 1.0 A)	2.0
KS823C04*	7	45	5.00 (T _c = 87°C)	60	0.55 (I _F = 2.5 A)	5.0

Notes: () indicates conditions. **Other Conditions:** ¹Square wave duty 1/2. ²Sine wave, 10 ms. ³V_R = V_{RRM}. *Dual schottky. **Thermal Ratings:** -40 to +125°C.

Fast Recovery Rectifiers

Mfr.'s Type	Fig.	Maximum Ratings		I _{RRM} ² Amps	Characteristics (T _a = 25°C)		T _{RR} μS
		V _{RRM} Volts	I _O ¹ Amps		V _{RM} Max. Volts	I _{RRM} ² Max. μA	
ERA34-10	1	1000	0.1 (T _a = 60°C)	2	3.00 (I _F = 0.1 A)	50	0.150 (I _F = I _R = 0.1 A)
ERA92-02	1	200	1.0 (T _a = 25°C)	25	1.05 (I _F = 1.0 A)	50	0.035 (I _F = 0.1 A, I _R = 0.2 A)
PA905C4	8	400	20.0 (T _c = 92°C)	80	1.50 (I _F = 10.0 A)	500	0.050 (I _F = 0.1 A, I _R = 0.2 A)
ES1B	9	100	1.0 (T _i = 110°C)	30	0.98 (I _F = 1.0 A)	200	0.020 (I _F = 0.5 A, I _R = 1.0 A)
YG902C2R	10	200	10.0 (T _c = 115°C)	50	0.95 (I _F = 5.0 A)	100	0.035 (I _F = 0.1 A, I _R = 0.2 A)
YG906C2R	10	200	20.0 (T _c = 102°C)	80	0.98 (I _F = 10.0 A)	200	0.035 (I _F = 0.1 A, I _R = 0.2 A)
ESAC92-02B	11	200	16.0 (T _c = 105°C)	50	0.98 (I _F = 8.0 A)	100	0.035 (I _F = 0.1 A, I _R = 0.2 A)
ESAD92-02B	8	200	30.0 (T _c = 98°C)	100	0.98 (I _F = 15.0 A)	200	0.040 (I _F = 0.1 A, I _R = 0.2 A)
SC311-4	6	400	0.5 (T _a = 25°C)	10	2.50 (I _F = 0.5 A)	50	0.050 (I _F = 0.1 A, I _R = 0.2 A)
SC902-02	6	200	1.0 (T _a = 25°C)	25	1.05 (I _F = 1.0 A)	50	0.035 (I _F = 0.1 A, I _R = 0.2 A)

Notes: () Indicates conditions. **Other Conditions:** ¹Single phase, sine half wave. ²1/2 cycle, 50 Hz. ³V_R = V_{RRM}. Additional full molded packages available. **Thermal Ratings:** -40°C to +150°C.