

✓ **54/74150** 010649


16-INPUT MULTIPLEXER

DESCRIPTION — Signals applied to the Select ($S_0 - S_3$) inputs determine which of the data inputs ($I_0 - I_{15}$) is routed through to the output. Data from the selected input appears at the output (Z) in inverted form. When the active-LOW Enable input is HIGH, the output will be HIGH, regardless of other input conditions.


ORDERING CODE: See Section 9

PKGS	PIN OUT	COMMERCIAL GRADE	MILITARY GRADE	PKG TYPE
		$V_{CC} = +5.0\text{ V} \pm 5\%$, $T_A = 0^\circ\text{C to } +70^\circ\text{C}$	$V_{CC} = +5.0\text{ V} \pm 10\%$, $T_A = -55^\circ\text{C to } +70^\circ\text{C}$	
Plastic DIP (P)	A	74150PC		9N
Ceramic DIP (D)	A	74150DC	54150DM	6N
Flatpak (F)	A	74150FC	54150FM	4M

CONNECTION DIAGRAM PINOUT A

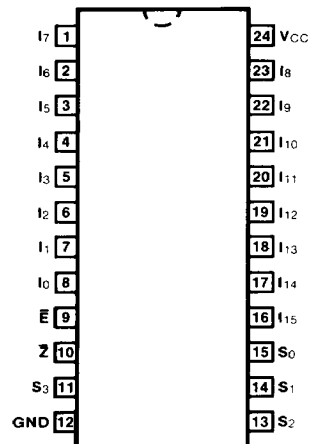

LOGIC DIAGRAM

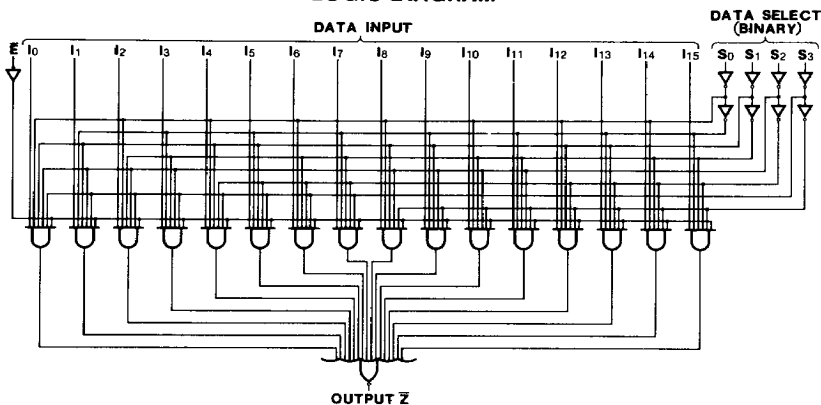

TRUTH TABLE

INPUTS					OUTPUT
S ₃	S ₂	S ₁	S ₀	E	Z
X	X	X	X	H	H
L	L	L	L	L	I ₀
L	L	L	H	L	I ₁
L	L	H	L	L	I ₂
.	.	.	.	.	.
H	H	L	L	L	I ₁₂
H	H	L	H	L	I ₁₃
H	H	H	L	L	I ₁₄
H	H	H	H	L	I ₁₅

H = HIGH Voltage Level
 L = LOW Voltage Level
 X = Immaterial

DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)

SYMBOL	PARAMETER		54/74		UNITS	CONDITIONS
			Min	Max		
I _{os}	Output Short Circuit Current	XM	-20	-55	mA	V _{CC} = Max
		XC	-18	-55		
I _{CC}	Power Supply Current			68	mA	V _{CC} = Max, V _{IN} = 4.5V

AC CHARACTERISTICS: V_{CC} = +5.0 V, T_A = +25°C (See Section 3 for waveforms and load configurations)

SYMBOL	PARAMETER	54/74		UNITS	CONDITIONS
		CL = 15 pF RL = 400 Ω			
		Min	Max		
tPLH tPHL	Propagation Delay Sn to Z̄, 3 Levels		35 33	ns	Figs. 3-1, 3-20
tPLH tPHL	Propagation Delay In to Z̄		20 14	ns	Figs. 3-1, 3-4
tPLH tPHL	Propagation Delay Ē to Z̄		24 30	ns	Figs. 3-1, 3-5