


Δ の数	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				.	△				.
△				.	△				.
△				.	△				.

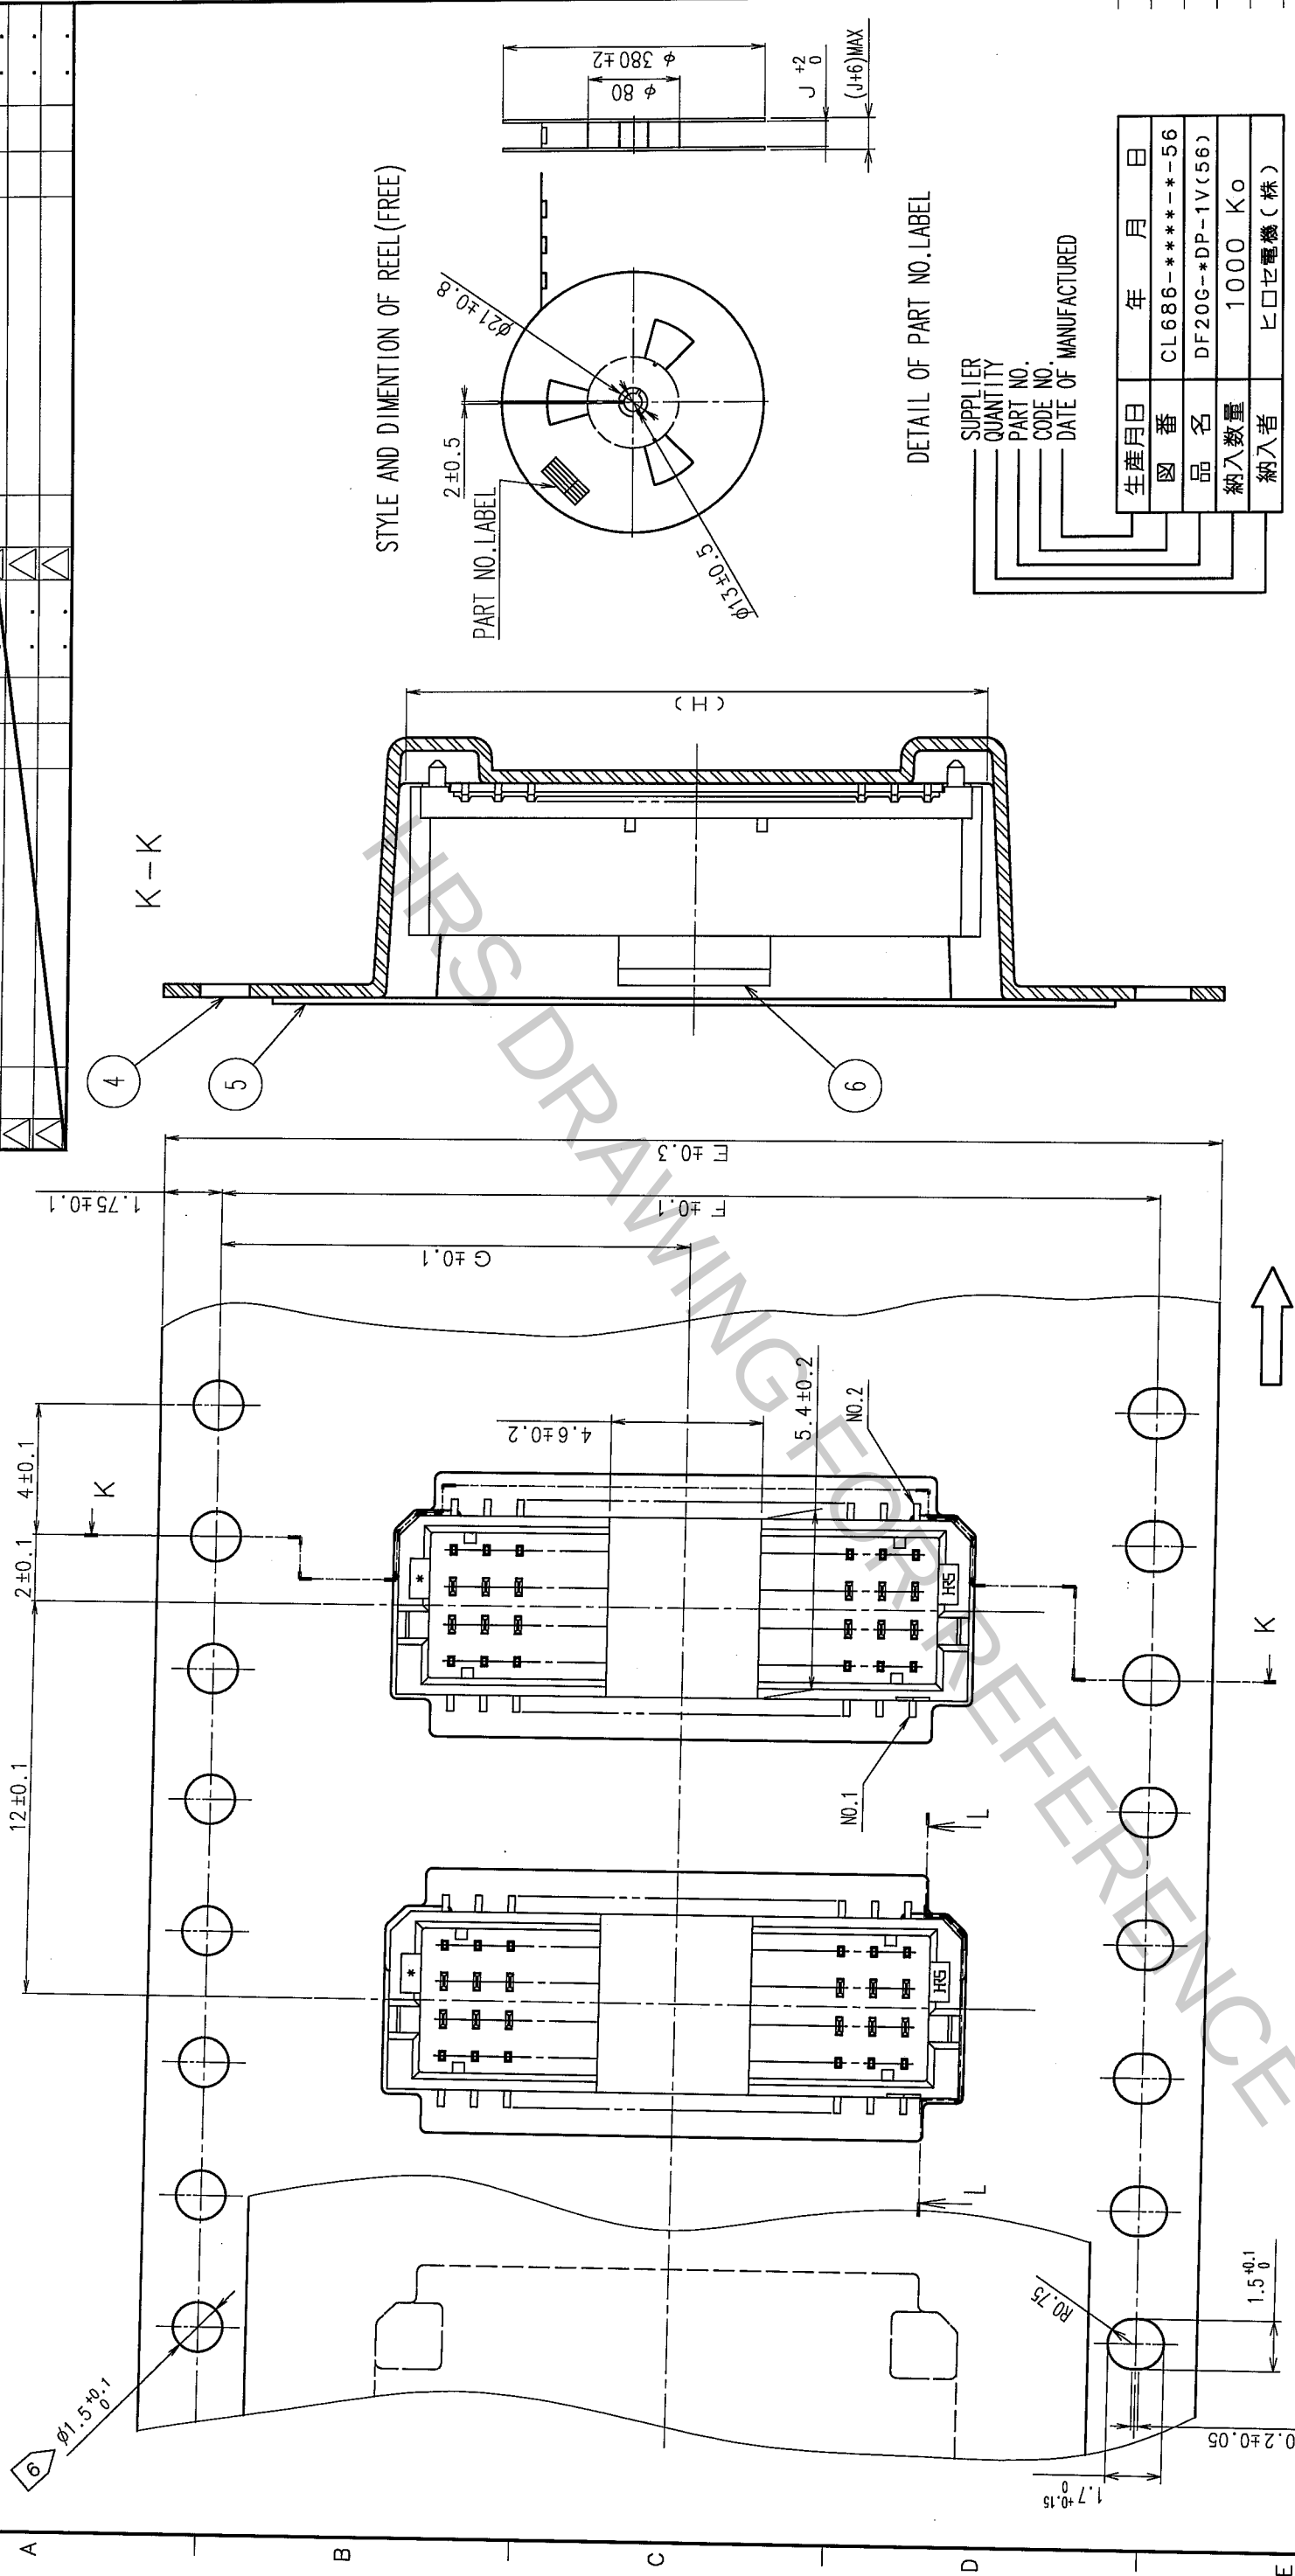

6 WHEN THE TAPE WIDTH IS 16 OR 24mm, SPROCKET HOLES SHALL BE SET ON THE UPPER SIDE OF REEL AS SHOWN ON THIS DRAWING.

PART NO.	NUMBER OF CONTACTS	E	F	G	H	J
CL686-0037-6-56	10	16	-	7.5	7.6	16.4
CL686-0038-9-56	20	24	-	11.5	12.6	24.4
CL686-0039-1-56	30	32	28.4	14.2	17.6	32.4
CL686-0040-0-56	40	44	40.4	20.2	22.6	44.4
CL686-0041-3-56	50	44	40.4	20.2	27.6	44.4

CODE NO. (OLD)		CL		RELEASED	
DRAWING NO. EDC3-164847-02		PART NO.		APPROVED	
		DF20G-*DP-1V(56)		J. Cna	
DRAWN A. MIURA		DESIGNED T. Kumagawa		CHECKED H. Umehara	
05.08.08		05.08.11		05.08.12	
HIROSE ELECTRIC CO., LTD		CODE NO.		CL686-	
HRS		SCALE 5 : 1		UNITS mm	