Search Results

Evaluate
- FAQ's
Design a Solution
- Catalog Cut Sheet
- PDF PK18-4R-C Pr
- Part Drawings
- PDF Ring Termina..
How to Buy
- Bill of Material
- Favorite Products List
- Locate Distributor

Current refinements (click ☒ to remove) Search Tips

☒ **Text Search: 'PK6-56R-T'**

Your search criteria matched only one product, shown below

PK6-56R-T

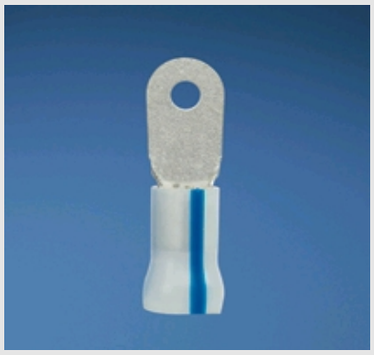

- Designed for use with #8 – 2 AWG copper wire
- For nuclear containment areas and high temperature to 300°F (150°C) applications
- Color coded: Natural with appropriate color stripe to identify wire range
- Ring tongue design assures a secure connection in high vibration applications
- Classified as Class 1E in accordance with IEEE 323 -2003
- Metal insulation grip sleeve crimps to wire insulation, providing protection to the crimp joint during high vibration applications

Part Number	PK6-56R-T
RoHS Compliancy Status	Compliant
Part Description	Ring terminal, #6 AWG, KYNAR insulated, 5/16" stud size.
Color	Blue Stripe
UL Listed	Yes
Length (In.)	1.72
Length (mm)	43.7
Width (In.)	0.62
Width (mm)	15.7
Clearance	0.53
Clearance (mm)	13.5
Insulation	Kynar
Max. Ins.	0.360
Max. Ins. (mm)	9.14
Panduit Color Code	Blue Stripe
Plating Type	Tinned
Pricing Description	Ring Terminal, large wire, KYNAR insulated, 6 AWG, 5/16" stud size
Stock	0.05
Stock (mm)	1.1
Stud Size	5/16"
Temperature Rating	300 Degrees Fahrenheit (150 Degrees Celsius)
Tool	CT-2600, CD-2600-6‡
Wire Range	6 AWG
Wire Range (mm²)	16mm²
Min. Order UOM	PC
Min. Order Qty.	200
BOM Qty. (# of Pkgs.)	0
Add to Favorite Product List	e

Please register to utilize the 'Bill of Materials', 'Submit Quotes' and 'Favorite Product List' features.

Copyright © 1995-2011, PANDUIT CORP. All rights reserved. | Legal Information | Privacy Policy