

## Type 1 Mild Steel Component Case 1416 Series

Ventilated Cover with Screws



### Application

- Designed to provide mechanical protection for components requiring ventilation.
- Suitable for use where heat dissipation is required.

### Standards

- Complies with
  - NEMA Type 1



### Construction



- Base is formed from 16 gauge steel with two 0.5"/0.75" conduit knockouts located in each end.
- Four .125" high raised dimples with mounting holes are provided on the base.
- Cover is formed from 18 gauge steel with 0.235" x 1.5" ventilating slots (0.199" x 1.12" on E & G only).
- Screw holes and offsets in the cover allow easy assembly.

### Finish

- Base and cover are finished in ANSI 61 gray powder coating.

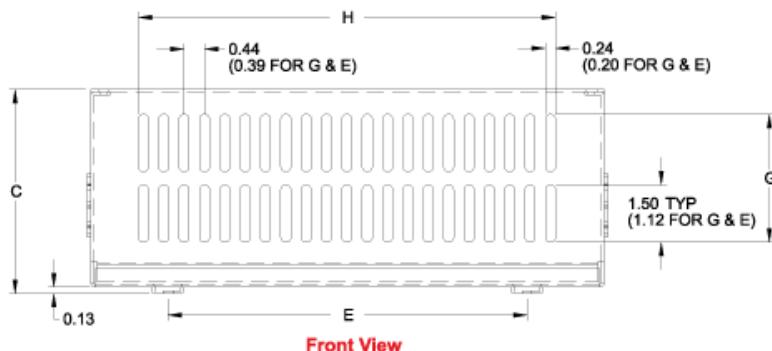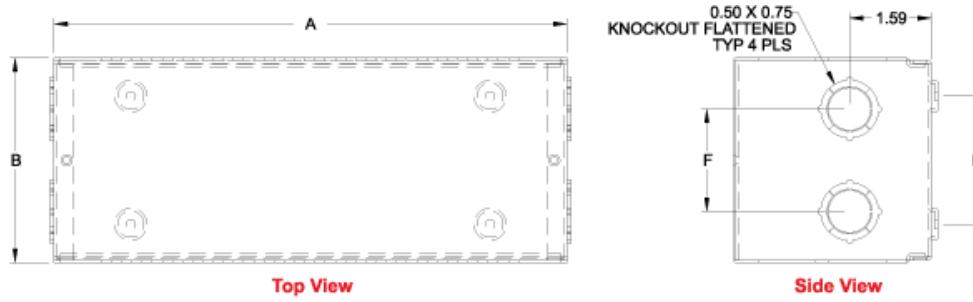

Part No.	Dimensions						Ventilated Area		Ship Wt.
	A	B	C	D	E	F	G	H	(Lbs)
<b>1416E</b>	6.00	4.00	4.00	2.50	4.00	2.00	2.50	4.06	2
<b>1416G</b>	10.00	4.00	4.00	2.50	7.00	2.00	2.50	8.31	2
<b>1416I</b>	10.00	6.00	6.00	4.50	7.00	3.00	3.25	7.68	4
<b>1416K</b>	11.00	7.00	7.00	5.50	8.00	4.00	5.00	7.68	6
<b>1416M</b>	12.00	8.00	8.00	6.50	9.00	5.00	5.00	10.31	8
<b>1416O</b>	15.00	10.00	8.00	8.50	12.00	6.00	5.00	12.93	10
<b>1416Q</b>	20.00	10.00	8.00	8.50	17.00	6.00	5.00	18.18	12
<b>1416T</b>	20.00	10.00	10.00	8.50	17.00	6.00	6.75	15.56	14

*Data subject to change without notice*

© 2015. Hammond Manufacturing Ltd. All rights reserved.