NOTES: **REVISION DN** 1. © REPRESENTS A CRITICAL DIMENSION. 2. MINIMUM PUSHOUT FORCE: .5 LB. 3. COPLANARITY: .004[0.10] = POS 05 THRU 26 .006[0.15] = POS 27 THRU 50 DO NOT CALE FROM 4. TUBE ALL POSITIONS. PARTS TO BE TUBED WITH THIS PRINT NOTCH GOING WITH ARROW 5. PINS CAN BE ORIENTED IN ANY DIRECTION; BOTH ROWS MUST FACE SAME WAY. 6. SEE NOTCH FOR PROPER ORIENTATION (C) 7. MAXIMUM PIN HEIGHT VARIATION: .003[0.08] FROM PIN TO PIN AND ROW TO ROW, MUST BE MEASURED BETWEEN ADJACENT PINS. 8. DUE TO HIGH AMOUNT OF INSERTION FORCE NEEDED, THE -LC OPTION IS NOT COMPATIBLE WITH AUTO PLACEMENT. SAMTEC RECOMMENDS MANUAL PLACEMENT FOR ALL ASSEMBLIES WITH THE -LC OPTION. 9. DIMENSION TO BE MEASURED AT BEND *: DIMENSIONS N/A FOR -N OPTION *.145 [3.68] REF *.020 [0.51] REF 120[3.05] REF *.080 [2.03] REF 02 opopokápopo 01 Ģ .050 [1.27] REF q

SFM-1XX-XX-XXX-D-XXX

No OF POSITIONS ALL POSITIONS AVAILABLE -02 THRU -50 (USE BODY: SFM-XX-D-XX-X)

LEAD STYLE

.050 [1.27]

Ģ

-01: THROUGH HOLE (USE CONTACT: C-44-01-XXX) SEE FIG 1, SHT 1)

-02: SURFACE MOUŃT

(USE CONTACT: C-44-02-XXX) (SEE FIG 2, SHT 2)

-03: ŠTRAIGHT MODIÉIED (USE CONTACT: C-44-03-XXX) SEE FIG 1, SHT 1)

-L1: THROUGH HOLE (LOW INSERTION) (USE CONTACT: C-61-01-XXX) SEE FIG 1, SHT 1)

-L2: SURFACE MOUNT (LOW INSERTION) (USE CONTACT: C-61-02-XXX) SEE FIG 2, SHT 2)

-L3: STRAIGHT MODIFIED (LOW INSERTION) (USE CONTACT: C-61-03-XXX) SEE FIG 1, SHT 1)

-T1: THROUGH HOLE (PHOS BRONZE) (USE CONTACT: C-119-01-XXX) SEE FIG 1, SHT 1)

-T2: SURFACE MOUNT (PHOS BRONZE) (USE CONTACT: C-119-02-XXX) (SEE FIG 2, SHT 2)

OPTIONS (LEAVE BLANK FOR STANDARD AND USE SFM-XX-D)

-N: NO POLARIZATIÓN NOTCH (USE SFM-XX-D-XX-N)

-A: ÀLIGNMENT PIN (USÉ SFM-XX-D-A-X) (SEE FIG 4, SHT 2)

-LC: LOCKING CLIP (SEE FIG 6, SHT 3 & NOTE 8) (AVAILABLE ON ALL LEADS)

-P: PIČK AND PLACE PAD (SEE FIG 5, SHT 2)

(AVAILABLE ON 5 THRU 50 POSITION ONLY)

-TR: TAPE & REEL (SEE SHT 4) (NOT AVAILABLE WITH -DS OPTION)

-K: POLYIMIDE FILM PAD (.005[0.13] THICKNESS) (SEE FIG 3, SHT 2) (USE K-DOT-.157-.250-.005) -SN: SOLDER NAIL FOR .062 BOARD

(SFM-XX-D-SN AND WT-27-01-T)

(AVAILABLE WITH LEAD STYLE -02, -L2 & -T2)NOT AVAILABLE WITH -A & -LC)

-SN2: SOLDER NAIL FOR .093 BOARD (SFM-XX-D-SN AND WT-27-02-T) (AVAILABLE WITH LEAD STYLE -02, -L2 & -T2)

(NOT AVAILABLE WITH -A & -LC)

-DS: DUAL SCREW DOWN FOR .062 BOARD (SEE FIG 8, SHT 3) ONLY AVAILABLE WITH -01, -02 AND -03 LEAD STYLE) (NOT AVAILABLE WITH OPTIONS -N, -A, -LC, -P, -TR, -K, -SN AND SN2), (USES SFM-XX-D-DS, CPS-RR-XX-XX-X, ACCRT-01 AND WT-27-XX-T ALWAYS FILLED)

BODY SPECIFICATION -D: DOUBLE ROW

PLATING SPECIFICATION

-S: 30µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-F: 3µ" FLASH SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-H: 30u" HEAVY GOLD IN CONTACT AREA. 3µ" GOLD ON TAIL

 -L: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-STL: 30µ" SELECTIVE GOLD IN CONTACT AREA, TIN/LEAD (90/10+/-5%) TAIL (ONLY AVAILABLE ON -02 OR -L2 LEADSTYLES)

-SM: 30µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-FM: 3µ" FLASH SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-LM: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA, MÄTTE TIN ON TAIL

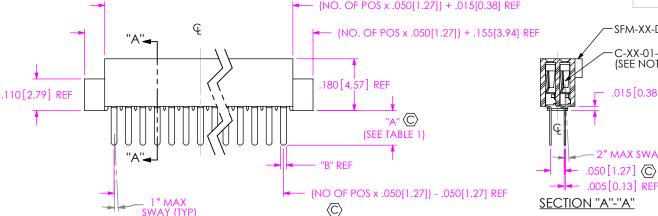


FIG 1 THROUGH HOLE/STRAIGHT MODIFIED

TABLE 1 SUFFIX|TAIL LENGTH "A"|TAIL WIDTH "B" -X1 .120[3.05] .020[0.51] -X3 .075[1.91] .016[0.41]

UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN INCHES. TOLERANCES ARE: DECIMALS

ANGLES .XX: ±.01 [.3] .XXX: ±.005 [.13] 2° .XXXX: ±.0020 [.051]

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN,
MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

SHEET SCALE: 3:1

PROPRIETARY NOTE

SFM-XX-D-LC-X

C-XX-01-XXX

(SEE NOTE 5)

.015 [0.38] REF

2° MAX SWAY (TYP)

DO NOT SCALE DRAWING INSULATOR: LCP UL 94V-O, COLOR: BLACK

CONTACT: TIGER EYE: BeCu TIGER EYE LITE: PHOSPHOR BRONZE

F:\DWG\MISC\MKTG\SFM-1XX-XX-XXX-D-XXX-MKT.SLDDRW




520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322


.050 x .050 SOCKET STRIP DOUBLE ROW ASSEMBLY


SFM-1XX-XX-XXX-D-XXX


BY: JORDAN 12/11/89

SHEET 1 OF 4

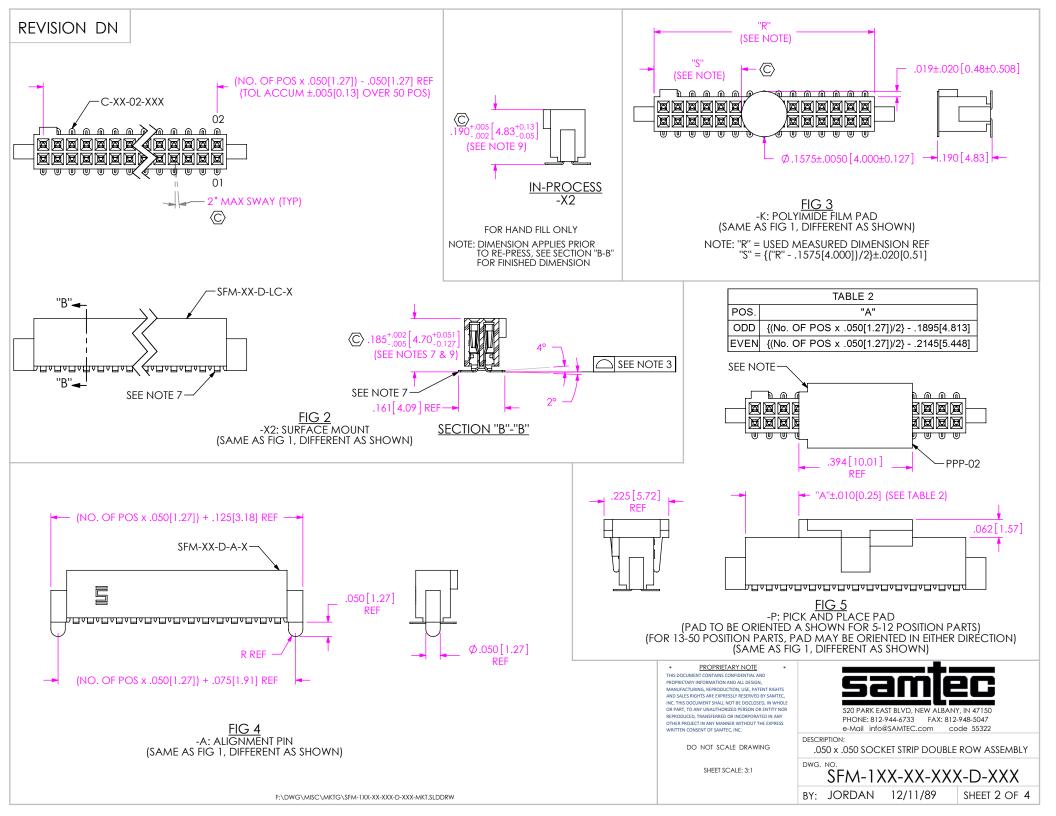

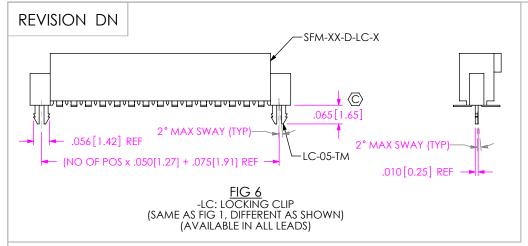

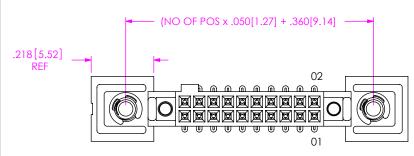








TABLE 3

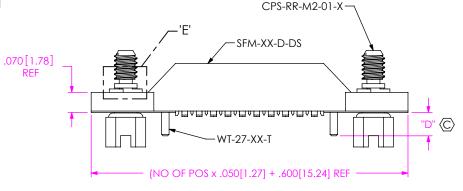

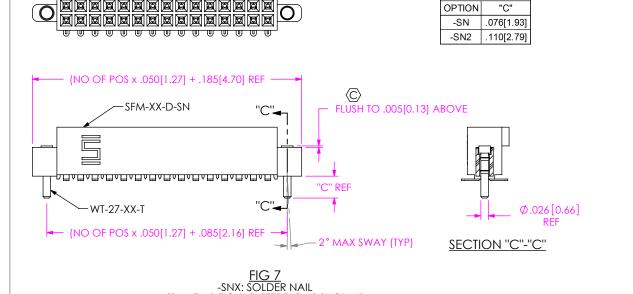

(SAME AS FIG 1, DIFFERENT AS SHOWN)

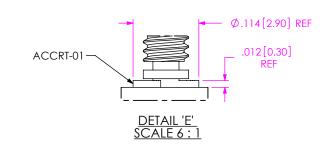


FIG 8 -DS: DUAL SCREW DOWN (SAME AS FIG 2, DIFFERENT AS SHOWN)

* PROPRIETARY NOTE THIS DOCUMENT CONTAINS CONFIDENTIAL AND

PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMPLE, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY MUNITHORIZED PERSON DE ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANWER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMPLE, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 3:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322


DESCRIPTION:


.050 x .050 SOCKET STRIP DOUBLE ROW ASSEMBLY


G. NO. SFM-1XX-XX-XXX-D-XXX

BY: JORDAN 12/11/89 SHEET 3 OF 4

F:\DWG\MISC\MKTG\SFM-1XX-XX-XXX-D-XXX-MKT.SLDDRW

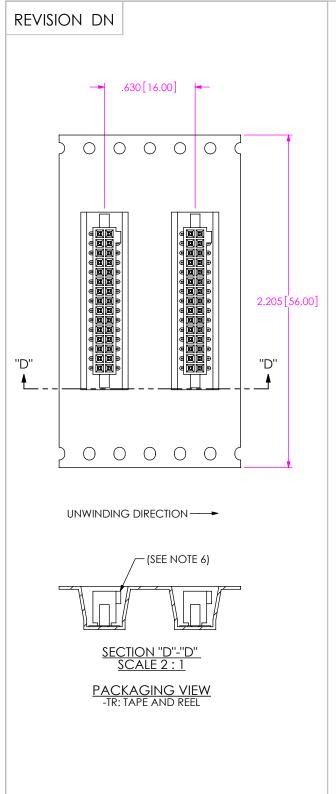

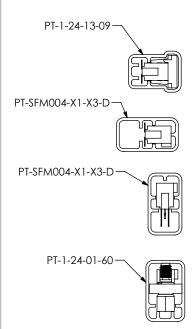

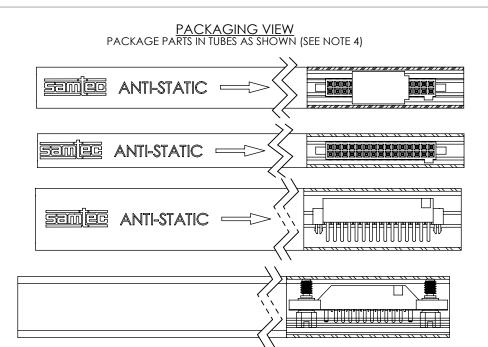

LEAD STYLE	PACKAGING TUBE	PLUG
-105-X2-X-D, -105X2-X-D-LC, -105-X2-D-A, -105-X2-D-K-LC, -105-X2-X-D-A-K	PT-1-24-14-09	TP-24-02
-X1-D, -X3-D, -X1-D-LC, -X3-D-LC, (NO P&P PAD) , X1-D-A, -X3-D-A, -X1-D-K, -X3-D-K	PT-SFM004-X1-X3-D	TP-24-02
-X1-D-P, -X1-D-LC-P (WITH P&P PAD), X1-D-A-P	PT-1-24-02-17	TP-09
-X2-D, -X2-D-K, -X2-D-LC (NO P&P PAD), -X2-D-A, -X2-D-K-A, -X2-D-LC-K, -X2-D-SNX	PT-SFM004-X1-X3-D	TP-24-02
-X2-D-P, -X3-D-P, -X2-D-LC-P (WITH P&P PAD), -X2-D-A-P, -X3-D-A-P, -X2-D-P-SNX	PT-1-24-13-09	TP-24
-01-DS, -02-DS, -03-DS	PT-1-24-01-60	TP-03

*FOR MACHINE LOADING OF TUBES FOR PARTS W/O PADS USE PT-1-24-14-09, W/PADS USE PT-1-24-13-09

> $5\ \text{POS}$ -01 AND -03 LEAD STYLES MAY BE TUBED USING PT-1-24-15-09, TP-24-02 2 POS -X1 STYLE TO BE TUBED IN PT-1-24-15-09

> > F:\DWG\MISC\MKTG\SFM-1XX-XX-XXX-D-XXX-MKT.SLDDRW

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN. MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC. INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS

DO NOT SCALE DRAWING

SHEET SCALE: 1.5:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

DESCRIPTION:

.050 x .050 SOCKET STRIP DOUBLE ROW ASSEMBLY

