



Features

- Small diameter
- Wide resistance range
- Good resolution
- Linear tapers
- Cermet element

3862 - 1/2 " Diameter Single-Turn Panel Control

Initial Electrical Characteristics¹

Standard Resistance Range.....	1K ohms to 1 megohm
Total Resistance Tolerance.....	(A Taper) $\pm 10\%$ (H Taper) $\pm 5\%$
Independent Linearity.....	$\pm 5\%$
Absolute Minimum Resistance.....	2 ohms maximum
Effective Electrical Angle.....	$260^\circ \pm 10^\circ$
Contact Resistance Variation.....	$\pm 3\%$ or 6 ohms (whichever is greater)
Dielectric Withstanding Voltage (MIL-STD-202, Method 301)	
Sea Level.....	750 VAC minimum
70,000 Feet.....	350 VAC minimum
Insulation Resistance (500 VDC).....	1,000 megohms minimum
Power Rating (Voltage Limited by Power Dissipation or 350 VAC, Whichever is Less)	
+70 °C.....	1 watt
+125 °C.....	0 watt
Theoretical Resolution.....	Essentially infinite

Environmental Characteristics¹

Operating Temperature Range.....	-40 °C to +125 °C
Storage Temperature Range.....	-65 °C to +125 °C
Temperature Coefficient Over Storage Temperature Range.....	± 150 ppm/°C
Vibration.....	20 G
Total Resistance Shift.....	$\pm 2\%$ maximum
Voltage Ratio Shift.....	$\pm 6\%$ maximum
Shock.....	50 G
Total Resistance Shift.....	$\pm 2\%$ maximum
Voltage Ratio Shift.....	$\pm 6\%$ maximum
Load Life.....	1,000 hours
Total Resistance Shift.....	$\pm 3\%$ maximum
Rotational Life, No Load	
(C & N Bushings).....	50,000 cycles
(E & T Bushings).....	1,000 cycles
Total Resistance Shift.....	$\pm 5\%$ maximum
Contact Resistance Variation.....	$\pm 3\%$ or 6 ohms (whichever is greater)
Moisture Resistance (MIL-STD-202, Method 106, Condition B)	
Total Resistance Shift.....	$\pm 2\%$ maximum
Insulation Resistance (500 VDC).....	100 megohms minimum
Salt Spray.....	MIL-STD-202, Method 101, Condition A
IP Rating.....	IP 40

Mechanical Characteristics¹

Stop Strength.....	33 N-cm (3 lb.-in.) maximum
Mechanical Angle.....	$295^\circ \pm 3^\circ$
Torque	
Starting and Running.....	3.53 N-cm (5 oz.-in.) maximum
Mounting (Torque on Bushing).....	1.7-2.0 N-m (15-18 lb.-in.) maximum
Shaft Locking Torque with Locking Bushings.....	14.12 N-cm (20 oz.-in.)
Weight (Single Section).....	25 grams maximum
Terminals.....	Printed circuit pins or J-Hooks
Soldering Condition.....	Recommended hand soldering using Sn85/Ag5 no clean solder, 0.025 " wire diameter Maximum temperature 399 °C (750 °F) for 3 seconds. No wash process to be used with no clean flux. Part can be wave soldered at 260 °C (500 °F) for 5 seconds, no wash process with no clean flux.
Marking.....	Manufacturer's trademark, wiring diagram, date code, resistance, manufacturer's part number
Ganging.....	1 cup maximum
Hardware.....	One lockwasher and one mounting nut is shipped with each potentiometer, except where noted in the part number.

¹ AT ROOM AMBIENT: +25 °C NOMINAL AND 50 % RELATIVE HUMIDITY NOMINAL, EXCEPT AS NOTED.

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.



Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

BOURNS®

PANEL LAYOUT

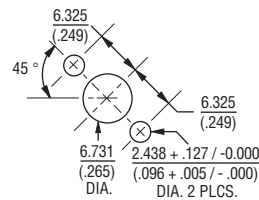

3862E/T

15.88 ± .015 STD. (5/8)

11.51 ± .41 (4.53 ± .016)

12.07 ± .76 (4.75 ± .030)

12.7 ± .41 (5.00 ± .016) DIA.

.89 ± .25 (2 PLCS. (.035 ± .010))

3.18 ± .03 (125 ± .001) DIA.

.79 (31)

6.25 (1/4) -32 UNEF - 2A

POSITION OF SLOTS VARIABLE

L = 9.53 (375) FOR "T" BUSHING, 12.7 (500) FOR "E" BUSHING

45° ± 5° X

.79 ± .25 (31 ± .010)

3862C/N

Technical drawing of a shaft-hub assembly. The drawing shows a shaft with a threaded section and a hub with a bore. Dimensions are given in inches and millimeters.

Key dimensions and features:

- Shaft Dimensions:**
 - Overall length: $11.51 \pm .41$ (453 $\pm$.016)
 - Threaded section length: $9.53, 22.23$ (3/8, 7/8) STD.
 - Threaded section diameter: $.89 \pm .25$ (.035 $\pm$.010)
 - Threaded section length: $.89 \pm .25$ (2 PLCS.)
 - Threaded section diameter: 2.38 (.094)
 - Threaded section length: $.79$ (.031)
 - Threaded section diameter: $45^\circ \pm 5^\circ \times .41$ (.016)
 - Threaded section length: $.79 \pm .25$ (.031 $\pm$.010)
 - Threaded section diameter: 16.88 (.5/8)
- Hub Dimensions:**
 - Overall length: $12.7 \pm .41$ (.500 $\pm$.016)
 - Hub diameter: $17 \pm .76$ (.030)
 - Hub diameter: 6.25 (1/4)
 - Hub diameter: 6.35 (250)
 - Hub diameter: 3.3 (.13)
 - Hub diameter: $.79 \pm .25$ (.031 $\pm$.010)
 - Hub diameter: 16.88 (.5/8)
- Other Features:**
 - Thread: $.32$ UNEF - 2A
 - Optional flat: 6.35 (250)
 - Long or: 3.3 (.13)
 - For "C" bushing: 6.35 (250)
 - For "N" bushing: 9.65 (.380)

Technical drawing of a cross-section of a lug. The drawing shows a central hole with a diameter of $2.31 \pm .091$ and a thickness of $.25 \pm .010$. The outer diameter is $6.22 \pm .245$. The angle of the outer edge is $45^\circ \pm 15^\circ$. The center of the lug is marked with a centerline symbol. The text indicates that the flat orientation at the CCW end slots are not oriented.

4.953
(.195) REF ONLY

2.286
(.09) TYP.

762
(.03) TYP.


8.89
(.35)

5.08
(0.20)

2.54
(0.10)

6.53
(.250) MAX.


1 2 3



Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.

How to Order 3862 Series Panel Controls

BOURNS®

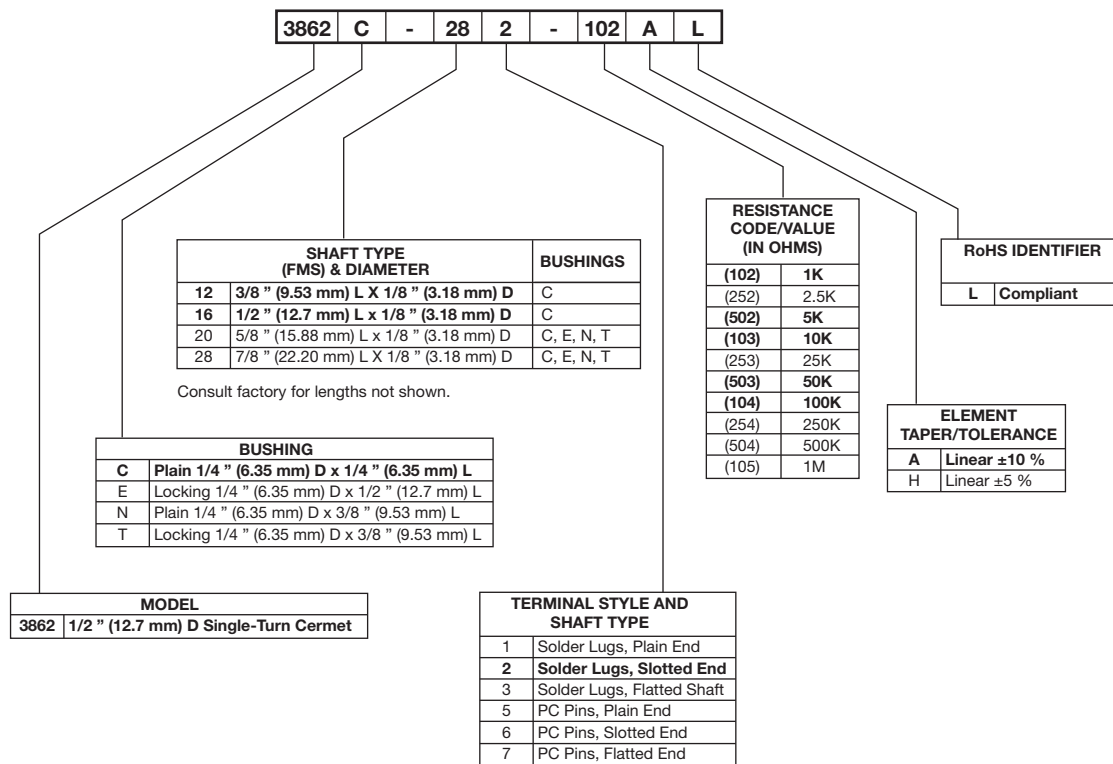

Boldface features are Bourns standard options. All others are available with higher minimum order quantities.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bourns:

[3862C-202-502A](#) [3862C-462-502A](#) [3862C-202-502H](#) [3862C-286-504A](#) [3862C-286-502A](#) [3862C-203-252A](#) [3862C-207-103A](#) [3862C-122-501A](#) [3862C-162-501A](#) [3862C-162-501H](#) [3862C-202-501A](#) [3862C-122-502A](#) [3862C-162-502A](#) [3862C-202-504A](#) [3862C-362-502A](#) [3862C-162-503A](#) [3862C-122-503A](#) [3862C-202-503A](#) [3862C-286-103A](#) [3862C-281-102A](#) [3862C-205-502A](#) [3862C-203-103A](#) [3862C-203-102A](#) [3862C-163-103A](#) [3862C-203-101A](#) [3862A-203-102A](#) [3862C-167-253A](#) [3862C-161-103A](#) [3862C-201-103A](#) [3862C-286-254A](#) [3862C-286-253A](#) [3862C-282-502A](#) [3862C-282-503A](#) [3862C-282-505A](#) [3862C-282-254A](#) [3862C-282-252A](#) [3862C-282-253A](#) [3862C-202-102A](#) [3862C-122-102A](#) [3862C-162-102A](#) [3862C-162-104A](#) [3862C-122-104A](#) [3862C-126-502A](#) [3862C-282-101A](#) [3862C-206-503A](#) [3862C-282-105A](#) [3862C-206-502A](#) [3862C-282-101H](#) [3862C-282-104H](#) [3862C-282-102A](#) [3862C-282-102H](#) [3862C-206-504A](#) [3862C-282-103A](#) [3862C-126-503A](#) [3862C-282-104A](#) [3862C-122-254A](#) [3862C-162-251A](#) [3862C-202-253A](#) [3862C-202-254A](#) [3862C-122-253A](#) [3862C-162-253A](#) [3862C-122-252A](#) [3862C-202-252A](#) [3862C-161-104A](#) [3862C-205-253A](#) [3862C-206-254A](#) [3862C-201-502A](#) [3862C-282-501A](#) [3862C-282-504A](#) [3862C-206-252A](#) [3862C-126-252A](#) [3862C-516-252A](#) [3862C-162-251AL](#) [3862C-162-501AL](#) [3862C-162-502AL](#) [3862C-202-103AL](#) [3862C-282-103AL](#) [3862C-282-502AL](#) [3862C-202-104AL](#) [3862C-282-102AL](#) [3862C-287-104A](#) [3862C-126-103A](#) [3862C-166-103A](#) [3862C-206-102A](#) [3862C-206-104A](#) [3862C-366-102A](#) [3862C-206-103A](#) [3862C-285-103A](#) [3862C-283-101H](#) [3862C-283-101A](#) [3862C-245-102A](#) [3862C-286-102A](#) [3862C-286-104A](#) [3862C-283-503A](#) [3862C-162-203A](#) [3862C-152-201A](#) [3862C-122-203A](#) [3862C-202-104A](#) [3862C-202-103A](#) [3862C-242-103A](#)