
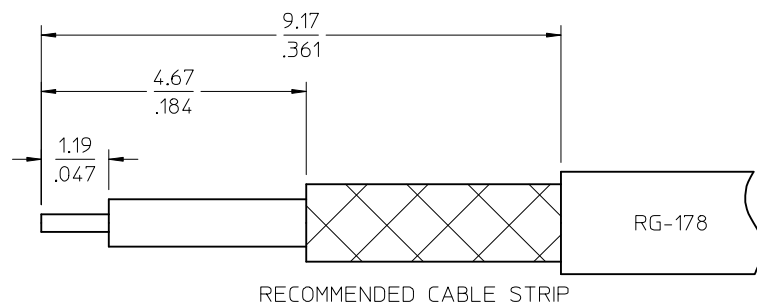
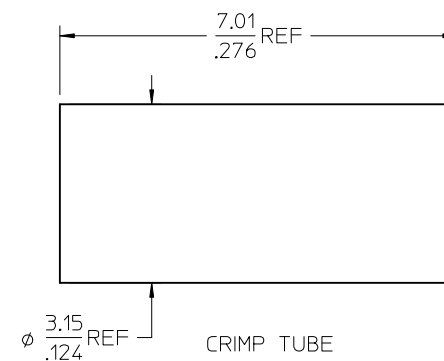
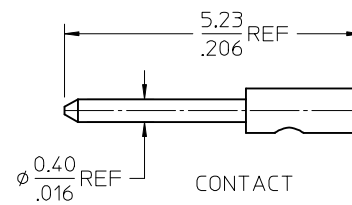
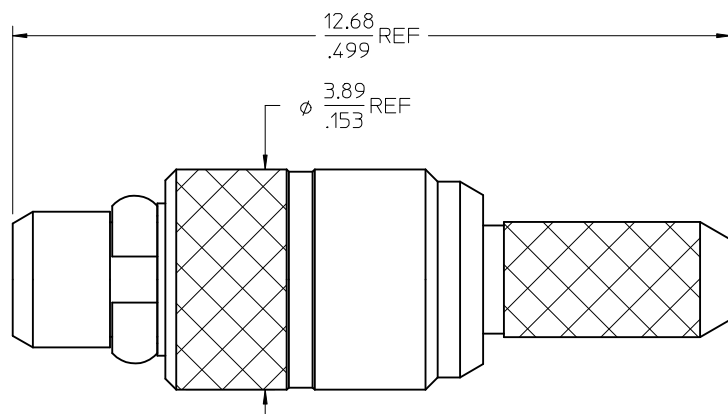


INSULATOR TEFLON

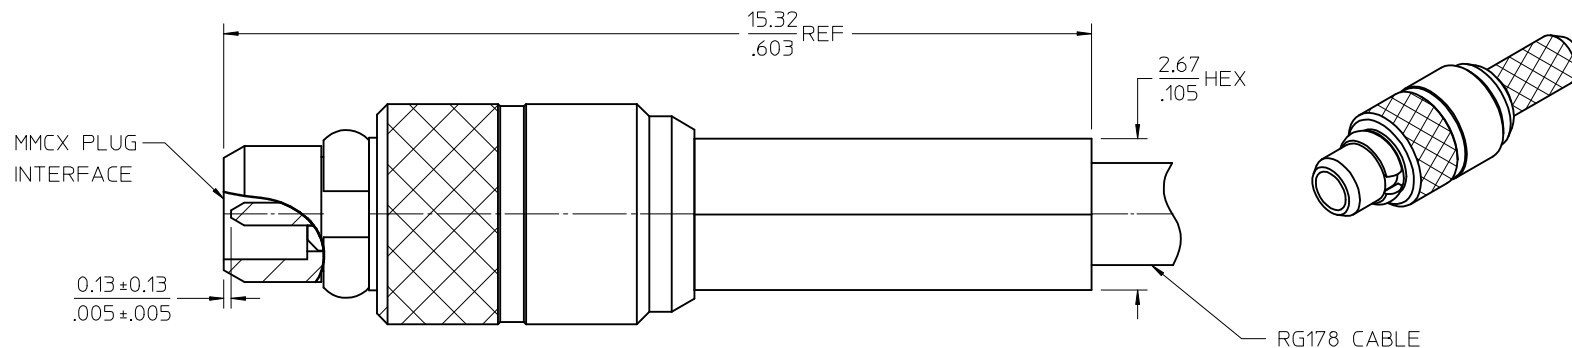

CECC 22 340	INTERFACE
PS-89675-1920	ELECTRO/MECH. PERFORM.
SPECIFICATION	DESCRIPTION

73415-0973	GOLD FLASH / PER BAG
73415-0972	P/N 73415-0971, ONE PIECE PER BAG
73415-0971	PER COMMERICAL REQUIREMENTS, PACKAGING-BULK
73415-0970	PER MILITARY REQUIREMENTS, PACKAGING-BULK
PART NO.	PLATING AND PACKAGING

ADDED 73415-0973
PER PDR13111484

REC NO: URF2014-0356
DRAWN: F I N 2013/12/10

CHIKD: 2013/12/18
APPR: MUANG 2013/12/18

DESCRIPTION

QUALITY
SYMBOLS

 = 0

 = 0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---

ANGULAR $\pm 2^\circ$

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

	DIMENSION STYLE
	MM/IN

DRAWN BY	DATE
TEF	1999/02/15
CHECKED BY	DATE
JOHNSON	2004/06/04
APPROVED BY	DATE
MISEN	2004/06/04

MATERIAL NO.	SEE TABLE
--------------	-----------

SIZE	THIS DRAWING CONT INCORPORATED AND
------	---------------------------------------

SCALE

DESIGN UNITS
METRIC

5  THIRD ANGLE PROJECTION

TITLE	REV	PROJ
MMCX PLUG, STRAIGHT 50 OHMS, FOR RG178 CABLE MMCX-PC		

MOLEX INCORPORATED

DOCUMENT NO. SD-73415-097	SHEET NO. 1 OF 1
------------------------------	---------------------

AINS INFORMATION THAT IS PROPRIETARY TO MOLEX
SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION