

Not Recommended for New Designs

This product was manufactured for Maxim by an outside wafer foundry using a process that is no longer available. It is not recommended for new designs. The data sheet remains available for existing users.

A Maxim replacement or an industry second-source may be available. Please see the QuickView data sheet for this part or contact technical support for assistance.

For further information, [contact Maxim's Applications Tech Support](#).



High-Precision, +2.5V Reference

MX580

General Description

The MX580 is a high-performance, three-terminal voltage reference which provides a stable +2.5V source for 8-, 10-, and 12-bit data converters and analog functions. A temperature-compensated internal bandgap operates from 4.5V to 30V and consumes only 1.5mA.

The reference can be connected directly to a number of CMOS analog-to-digital and digital-to-analog converters and is especially convenient in +5V powered systems. An initial untrimmed accuracy of 0.4% and temperature stability of 10ppm/°C allow adjustment-free designs in many precision applications.

Available packages include TO-52 metal cans for commercial and military temperature grades, as well as 8-pin SO packages for commercial grade devices.

Applications

CMOS Data Conversion
Digital Panel Meters
Portable Instrumentation
Remote Measurement Systems
Logic-Powered Analog Systems


Features

- ◆ 2.500V $\pm 0.4\%$ Accuracy (MX580L/M)
- ◆ 10ppm/°C Temperature Stability (MX580M)
- ◆ No Adjustments
- ◆ 250 μ V Long-Term Stability
- ◆ 1.5mA Quiescent Current
- ◆ 4.5V to 30V Operation


Ordering Information

PART	TEMP RANGE	PIN-PACKAGE	TOLERANCE
MX580JH	0°C to +70°C	TO-52 Can	± 75 mV
MX580KH	0°C to +70°C	TO-52 Can	± 25 mV
MX580LH	0°C to +70°C	TO-52 Can	± 10 mV
MX580MH	0°C to +70°C	TO-52 Can	± 10 mV
MX580JCSA	0°C to +70°C	8 SO	± 75 mV
MX580KCSA	0°C to +70°C	8 SO	± 25 mV
MX580LCSA	0°C to +70°C	8 SO	± 10 mV
MX580JESA	-40°C to +85°C	8 SO	± 75 mV
MX580KESA	-40°C to +85°C	8 SO	± 25 mV
MX580SH	-55°C to +125°C	TO-52 Can	± 25 mV

Typical Application Circuit

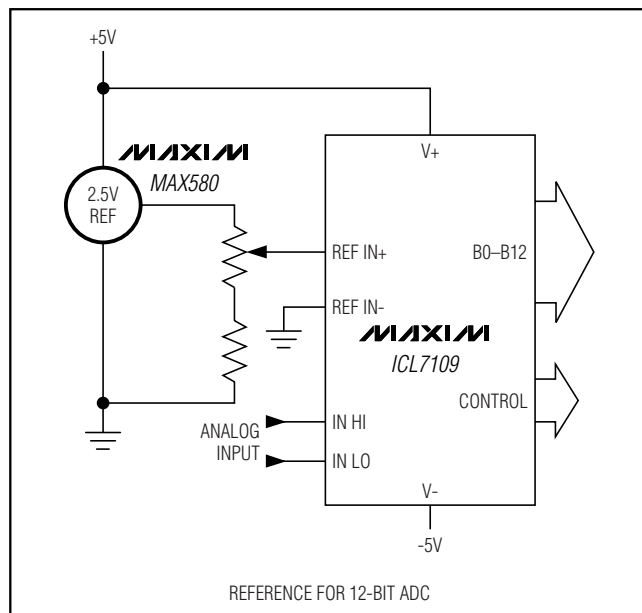

Pin Configurations

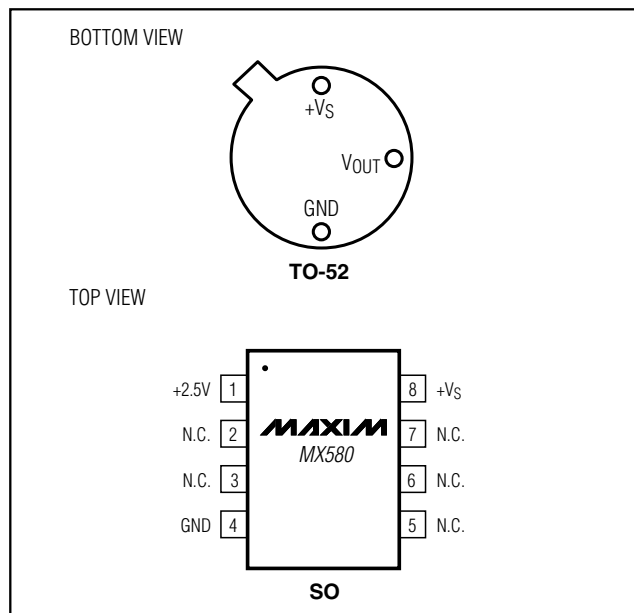

High-Precision, +2.5V Reference

ABSOLUTE MAXIMUM RATINGS

Input Voltage (V_{IN} to GND)-0.3V, +40V
 Continuous Power Dissipation
 TO-52 Metal Can (derate 2.8mW/°C above +25°C)350mW
 SO (derate 5.3mW/°C above +75°C)400mW
 Output Short-Circuit Duration (Note 1)Indefinite
 Operating Temperature Range
 Commercial (J, K, L, M)0°C to +70°C
 Military (S)-55°C to +125°C

Storage Temperature Range-65°C to +175°C
 Lead Temperature (soldering, 10s)+300°C
 Thermal Resistance, Junction to Ambient
 TO-52 Metal Can.....+360°C/W
 SO+170°C/W
 Junction to Case
 TO-52 Metal Can.....+100°C/W
 SO+55°C/W

Note 1: Absolute maximum power dissipation must not be exceeded.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V_{IN} = +15V. T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage Tolerance		$I_L = 0\text{mA}$	MX580J/S			±75	mV
			MX580K			±25	
			MX580L/M			±10	
Output Voltage Change with Temperature (Temperature Coefficient)		$T_A = 0^\circ\text{C to } +75^\circ\text{C}$	MX580J			15 (85)	mV (ppm/°C)
			MX580K			7 (40)	
			MX580L			4.3 (25)	
			MX580M			1.75 (10)	
		$T_A = -40^\circ\text{C to } +85^\circ\text{C}$	MX580J			20 (64)	
			MX580K			12 (38)	
		$T_A = -55^\circ\text{C to } +125^\circ\text{C}$	MX580S			25 (55)	
Line Regulation		$I_L = 0\text{mA}, 4.5\text{V} < V_{IN} < 7\text{V}$	MX580J/S		0.3	3	mV
			MX580K		0.3	2	
			MX580L/M			1	
		$I_L = 0\text{mA}, 7\text{V} < V_{IN} < 30\text{V}$	MX580J/S		1.5	6	
			MX580K		1.5	4	
			MX580L/M			2	
Load Regulation		$I_L = 0\text{mA to } 10\text{mA}$				10	mV
Quiescent Supply Current	I_Q	$I_L = 0\text{mA}$			1.0	1.5	mA
Noise	$e_n(\text{P-P})$	0.1Hz to 10Hz			60		μV _{P-P}
Stability		Long term			250		μV
		Per month			25		

High-Precision, +2.5V Reference

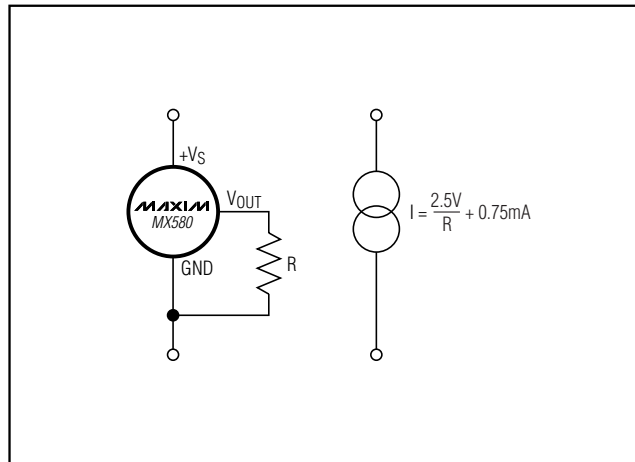




Figure 1. Two-Component Precision Current Limiter

MX580

High-Precision, +2.5V Reference

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

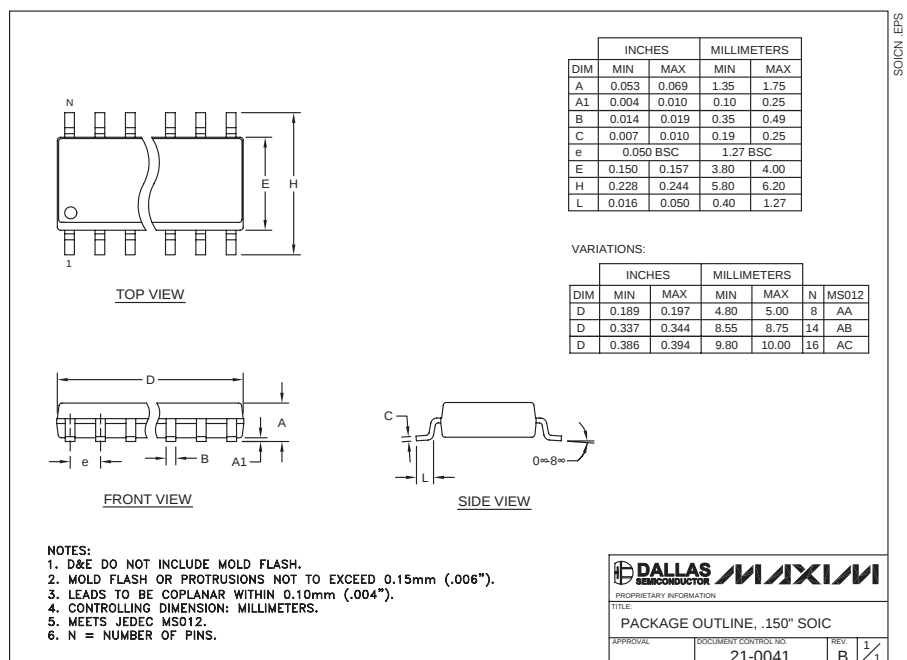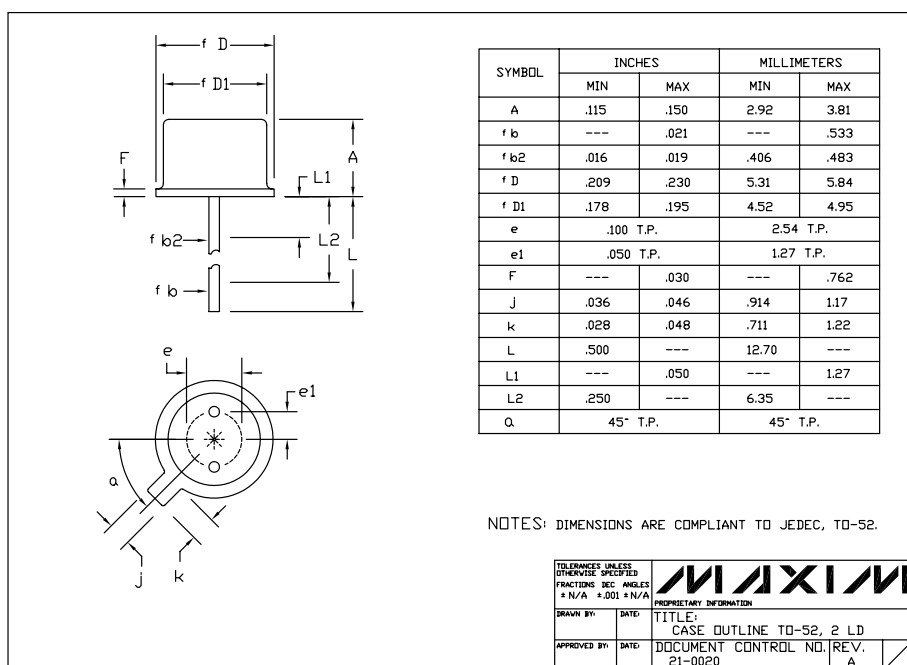

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

4 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600