
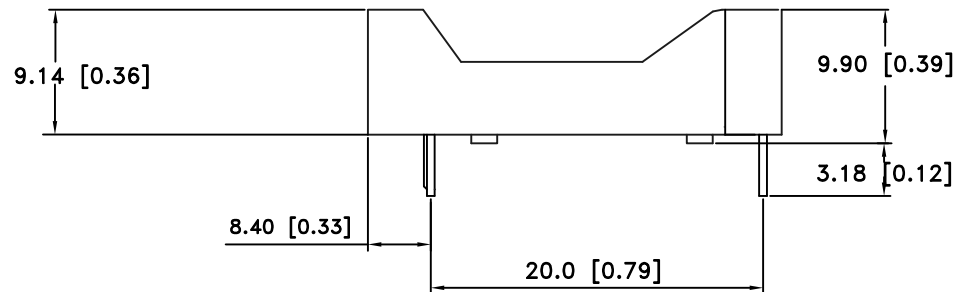


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
8/04/07	B	REDRAWN ADDED "ROHS COMPLIANT"	T.B.	B.S.	
12/09/11	C	UPDATED NOTES	T.B.	B.S.	
02/03/12	D	REMOVED "SOLDER DIPPED TAILS" FROM NOTES	T.B.	B.S.	
03/30/12	E	Dim. 1.17 was 1.02	T.B.	B.S.	

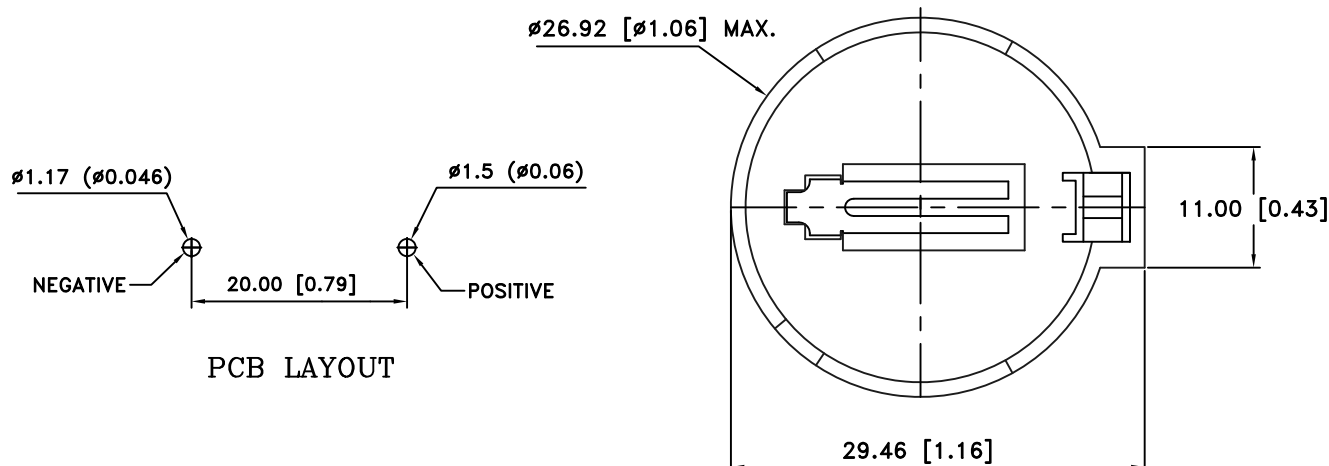

NOTES:

MATERIAL:

BODY: FR-NYLON WITH 15% GLASS FILLED,

UL94V-0, UL FILE NO. E176060(S)

CONTACT: PHOSPHOR BRONZE, NICKEL PLATED
OVERALL

APPLICATION FOR 3V LITHIUM BATTERY:

INSULATOR RESISTANCE: 5000MEGA Ω MIN.

OPPERATION TEMPERATURE: -55°C TO +105°C

DURABILITY: 50 CYCLES MIN.

CONTACT RESISTANCE: 30MILLI Ω MAX.

ROHS COMPLIANT

Tolerance (Except as noted)	 Memory protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)		Scale 4=1	Drawn By T.S. Approved By T.B.
Fractional $\pm .8$ (.030)		Title BATTERY HOLDER FOR CR2450	
Angular $\pm 3^\circ$	Date 03/30/12	Drawing Number BS-2450	