


English	Español	Français	Italiano	Deutsch	Polski	Português	По Русски
中文显示	日本語	한국어					



Datasheet Crimp Housings

[[Home](#) > [Products](#) > [Crimp Housings](#) > Datasheet]

50-57-9407


2.54mm (.100") Pitch SL™ Crimp Housing, Single Row, Version G, Positive Latch, 7 Circuits

View all parts
in series
[70066g](#)

[E-mail
this page](#)

[Samples](#)

[Distributor Stock](#)

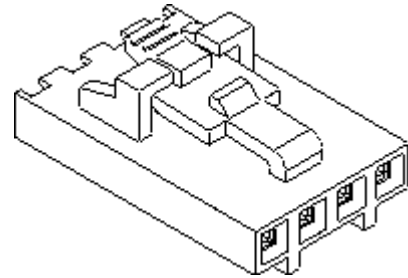

Status	Active
Circuits / Positions	7
Pitch / Center Spacing	2.54mm (.100")
Rows	1
Product Name	SL™
Gender	Female
Stackable	No
Wire Entry Angle	Vertical
Panel Mount	No

RELATED PRODUCTS

Mates With	70018, 70107A, 70107B, 70541, 70543, 70545, 70551, 70553, 70555, 70634
Use With	70058, 71851

PHYSICAL

Housing Material	PBT Polyester, Glass-filled
Color	Black
Flammability	UL 94V-0
Temperature Range	-40°C to +105°C

REFERENCE

Product Specification	PS-70058, PS-70400
Packaging	Bag
UL File Number	E29179
CSA File Number	LR19980
MX01 Catalog Page	C-12
970 Catalog Page	A-35
990 Catalog Page	A-33
Comment	Version G
Old Part Number	70066-0181
Molex Series	70066
Marketing Series	70066g

ENVIRONMENT

RoHS Status	ELV and RoHS Compliant
-----------------------------	------------------------

Features and Benefits

- Positive latch secures housing to locking crown of mating header or panel mount
- Anti-entanglement/overstress ribs prevent discrete wires from catching under latch during harness manufacturing and storage
- Front ribs prevent contact damage when unmating the connector from a header; the housing cannot be twisted off pins

For all product dimensions, please refer to Drawing (PDF).