

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16		0	REV PER EC-0S14-0496-04	02FEB2005	LV	JL

D

C

B


A

D


C

B

A

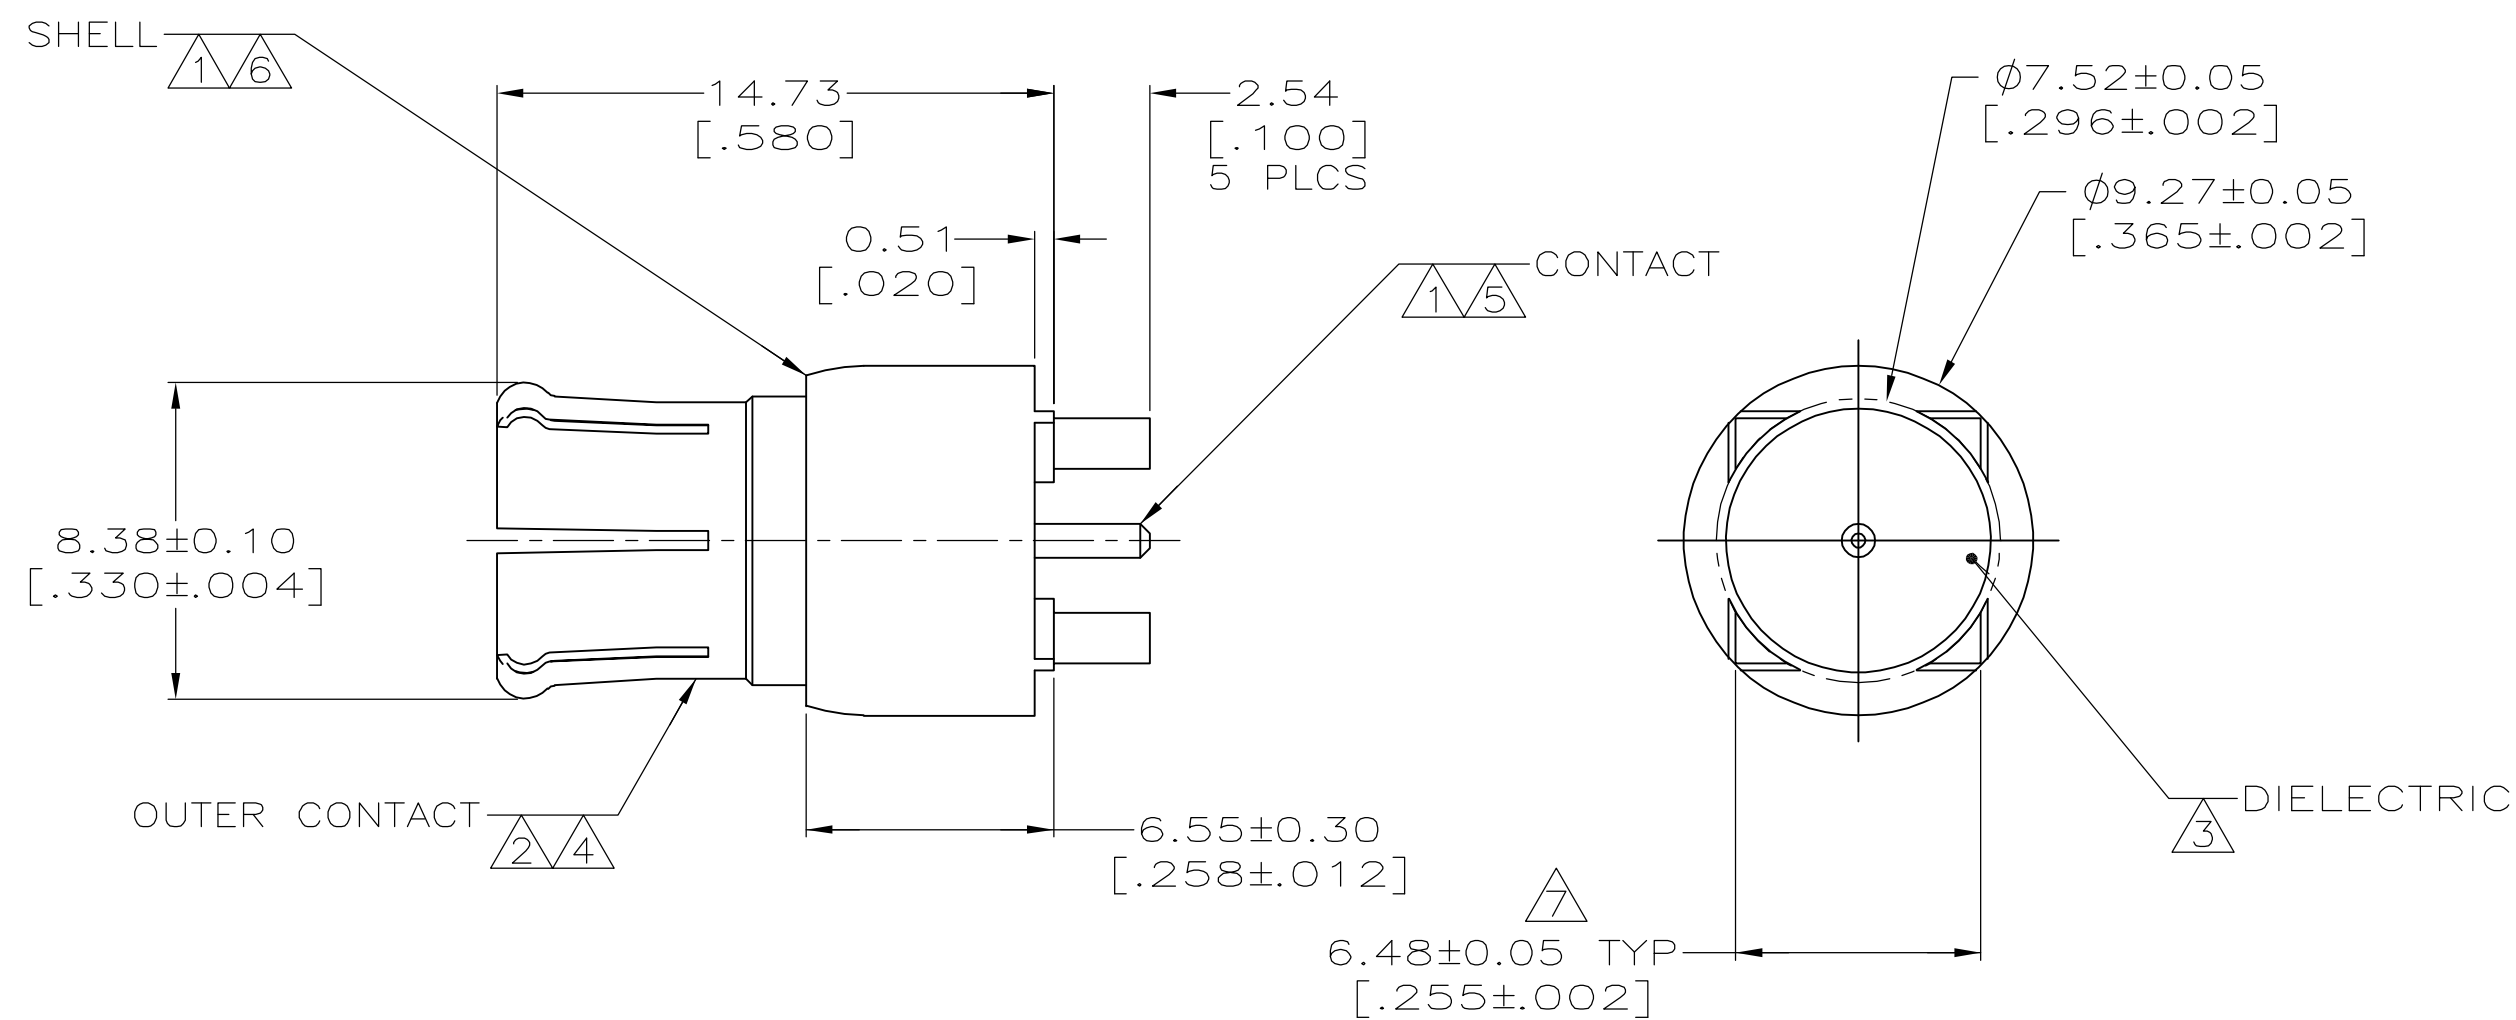

- 1 BRASS PER ASTM-B-453
- 2 BERYLLIUM COPPER PER ASTM-B-196
- 3 PTFE PER MIL-P-19468
- 4 NICKEL PLATE PER QQ-N-290
5.08 μm [.000200] MINIMUM THICK.
- 5 GOLD PLATE PER MIL-G-45204
0.76 μm [.000030] MINIMUM THICK.
- 6 TIN PLATE PER ASTM-B-545,
3.04 μm [.000120] MINIMUM THICK.
- 7 DIMENSION TO OUTSIDE OF LEGS

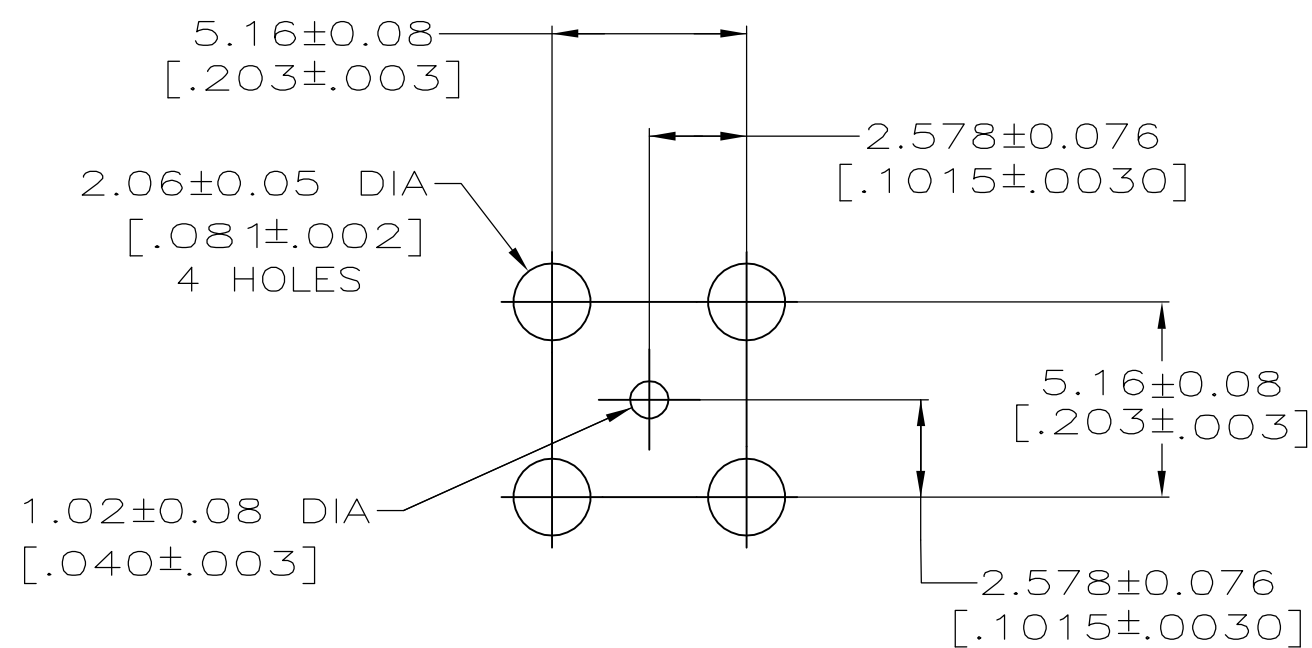

RECOMMENDED PCB CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. VARELA - 02FEB2005	tyco Tyco Electronics Corporation Electronics Harrisburg, PA 17105-3608			
DIMENSIONS: INCHES		CHK J. HAVENER 02FEB2005				
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.20 [.008] 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD J. LIPPERT 02FEB2005	NAME PUSH ON PLUG, PCB, 75 OHM, VERT, BNC			
		PRODUCT SPEC 108-12078				
		APPLICATION SPEC				
MATERIAL SEE NOTES 1 - 3	FINISH SEE NOTES 4 - 6	WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C=6274360	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 5:1	SHEET 1	OF 1	REV 0