


SMD Power Inductor


CDEPI7D10




Description

- Ferrite core construction.
- Magnetically shielded.
- L × W × H: 11.4 × 7.7 × 10.5 mm Max.
- Product weight: 2.6 g (Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Dimension - [mm]

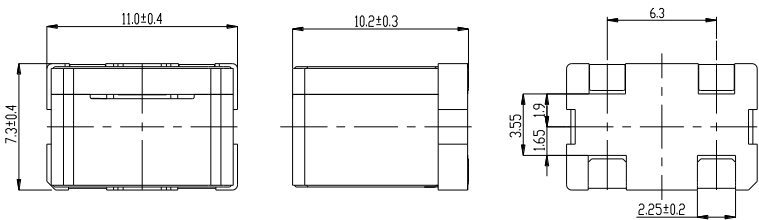

Land pattern and Schematics - [mm]

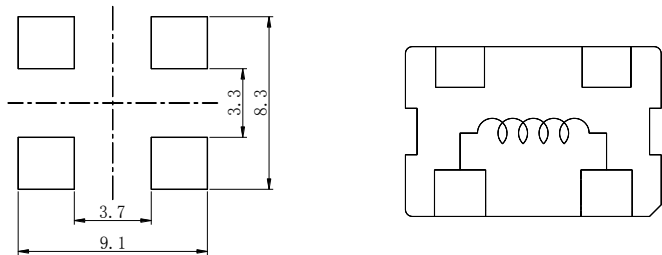

Environmental Data

- Operating temperature range: -40℃ ~ +105℃ (including coil's self temperature rise)
- Storage temperature range: -40℃ ~ +105℃
- Solder reflow temperature: 260 ℃ peak.

Packaging

- Carrier tape and reel packaging
- 13.0" diameter reel
- 250pcs per reel

Applications

- Ideally used in D Class Amplifiers.

Electrical Characteristics

Part No.	Stamp	Inductance [Within] (μH) ※1	D.C.R. (mΩ) [Max.] (Typ.) (at 20℃)	The saturation current (A) ※2		Temperature rise current (A) ※3
				(at 20℃)	(at 105℃)	
CDEPI7D10NP-100MC-70	100	10 ± 25%	24.5(19.6)	7.0	5.4	4.3
CDEPI7D10NP-150MC-70	150	15 ± 20%	30.8(24.6)	5.7	4.4	4.0
CDEPI7D10NP-180MC-98	180	18 ± 20%	26.4(22.0)	4.5	3.4	4.2
CDEPI7D10NP-220MC-98	220	22 ± 20%	30.8(24.6)	3.8	3.0	4.0

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 75% of it's nominal value.





※3. Temperature current: The value of D.C. current when the temperature rise is Δt=40℃(Ta=20℃).

SMD Power Inductor CDEPI7D10




Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

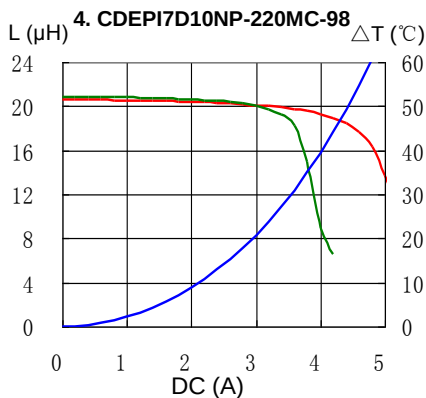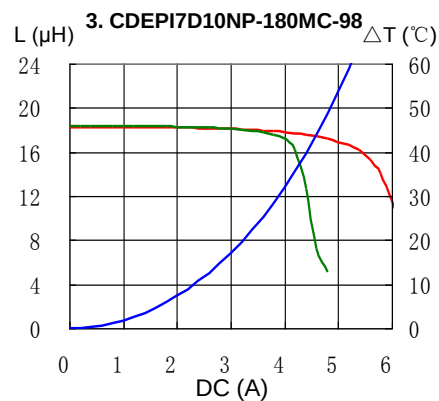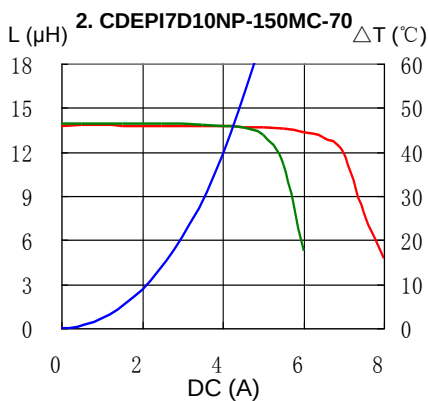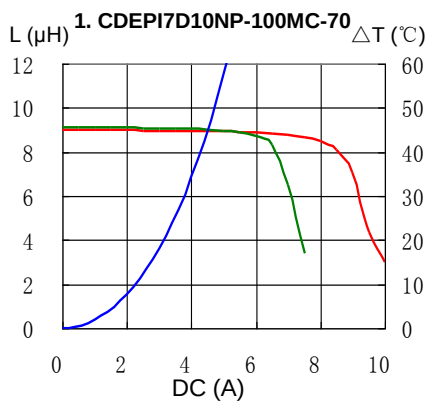


Solder Reflow Condition

Heat Endurance

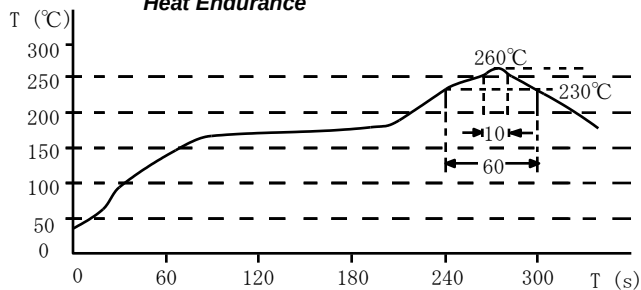

Temperature Chart

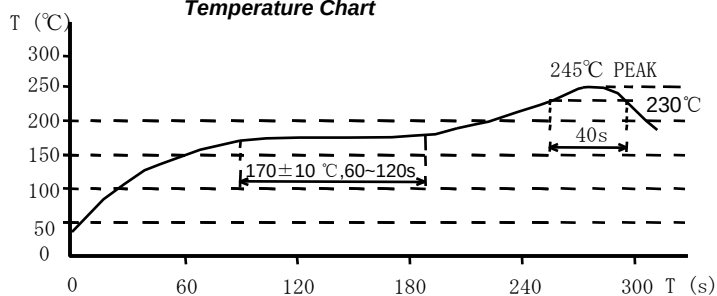

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com