


Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

Silicon Rectifier
150 Amperes Average
1600 Volts

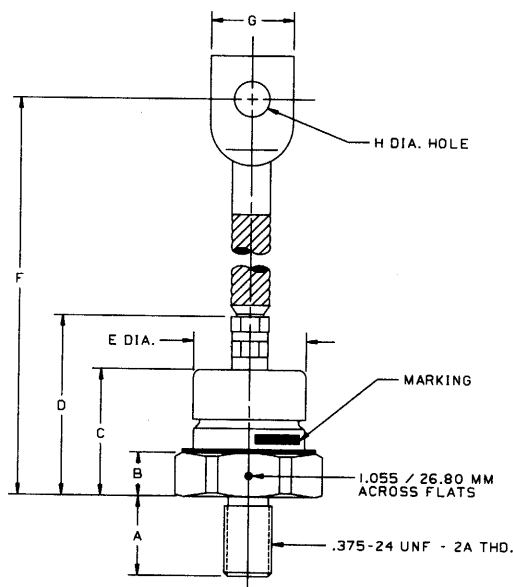


CASE NUMBER R50
NOMINAL DIMENSIONS

STRIKE DISTANCE = .64 INCH / 16.2 MM MIN.
CREEPAGE DISTANCE = .64 INCH / 16.2 MM MIN.

SYM.	A	B	C	D	E	F	G	H	J	K
INCHES	.63	.34	.98	1.58	.89	4.48	.63	.281	----	----
MM	16.0	8.6	24.9	40.1	22.6	113.8	16.0	7.14	----	----

ALL DIMENSIONS ARE REFERENCE

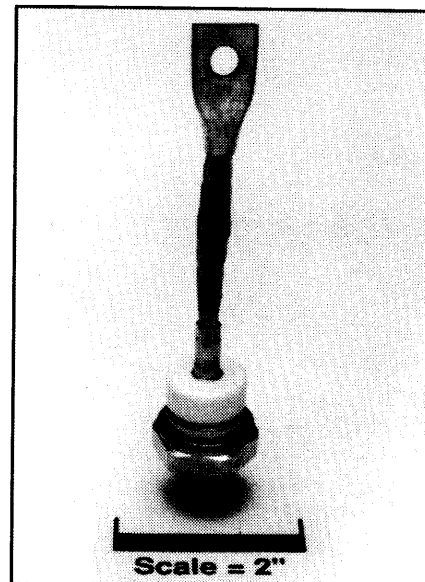

A180 (R)
Silicon Rectifier
150 Amperes Average, 1600 Volts

A180 (R) (Outline Drawing)

Ordering Information:

Select the complete five or six digit part number you desire from the table, i.e. A180PM is a 1600 Volt, 150 Ampere Silicon Rectifier.

Type	Voltage		Current $I_{T(av)}$
	V_{RRM}	Code	
A180	200	B	150
	400	D	
	600	M	
	800	N	
	1000	P	
	1200	PB	
	1400	PD	
	1600	PM	

Features:

- ☐ Hermetic Seal

Applications:

- ☐ Transportation Equipment
- ☐ DC Motor Control
- ☐ DC Power Supplies
- ☐ Battery Vehicles



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

A180 (R)

Silicon Rectifier

150 Amperes Average, 1600 Volts

Absolute Maximum Ratings

Characteristics	Symbol	A180 (R)	Units
RMS Forward Current	$I_{F(rms)}$	236	Amperes
Average Forward Current	$I_{F(av)}$	150	Amperes
One Cycle Surge Current	I_{FSM}	3400	Amperes
I^2t (for Fusing), Times ≥ 1.0 milliseconds	I^2t	22000	A^2sec
Storage Temperature	T_{stg}	-40 to +200	$^{\circ}C$
Operating Temperature	T_j	-40 to +200	$^{\circ}C$
Mounting Torque (Lubricated)		90 to 100 10.2 to 11.3	in-lb N-m

Electrical and Thermal Characteristics

Characteristics	Symbol	Test Conditions	A180 (R)	Units
Current - Conducting State Maximums				
Forward Voltage Drop	V_{FM}	$T_C = 143^{\circ}C$, $I_{F(av)} = 150A$, 471A Peak	1.3	Volts
Voltage - Blocking State Maximums				
Repetitive Peak Reverse Voltage (Rated Limit)	V_{RRM}		1600	Volts
Non-rep. Trans. Peak Rev. Voltage (Rated Limit)	V_{RSM}	$V \leq 5.0msec$	1800	Volts
Reverse Leakage Current, mA peak	I_{RRM}	T_j at max., $V_{RRM} = \text{Rated}$	20	mA
Thermal				
Maximum Resistance, Junction to Case	$R_{\theta(j-c)}$		0.3	$^{\circ}C/Watt$




Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14


A180 (R)

Silicon Rectifier


150 Amperes Average, 1600 Volts

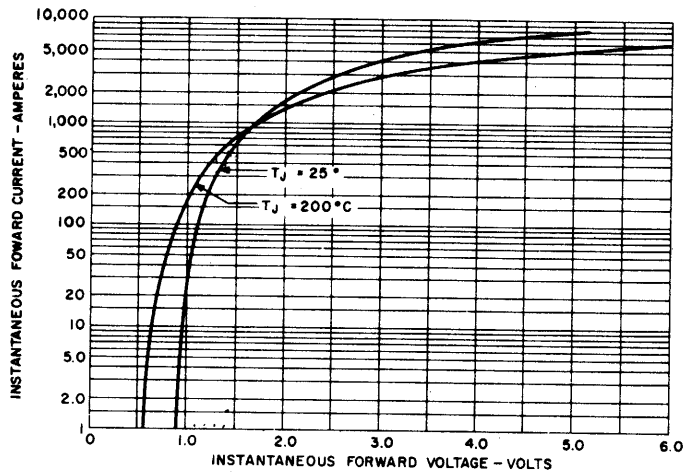


MAXIMUM FORWARD CHARACTERISTICS

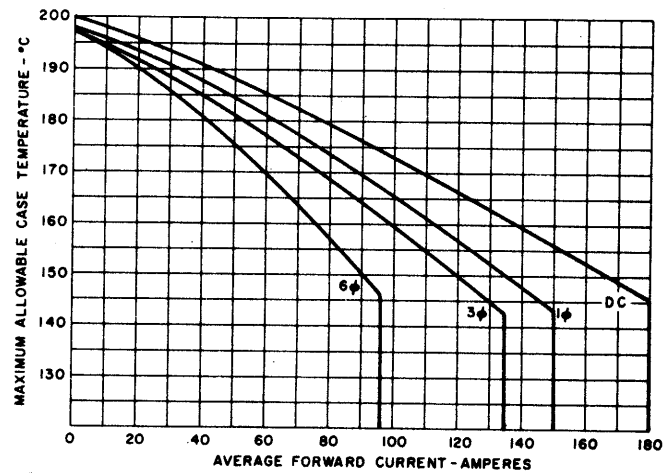

MAXIMUM CASE TEMPERATURE VS.
AVERAGE FORWARD CURRENT

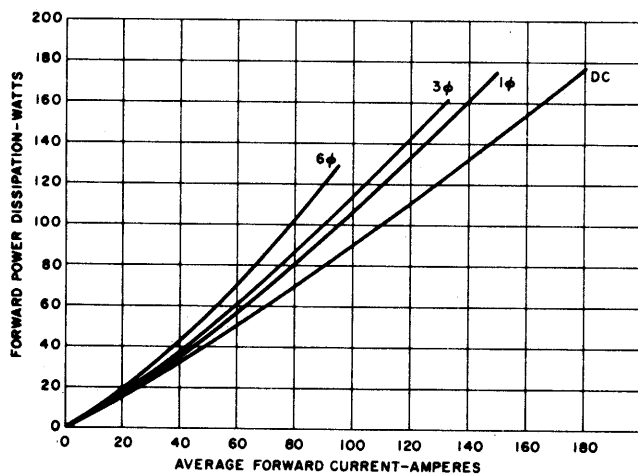

AVERAGE FORWARD POWER DISSIPATION
VS. AVERAGE FORWARD CURRENT

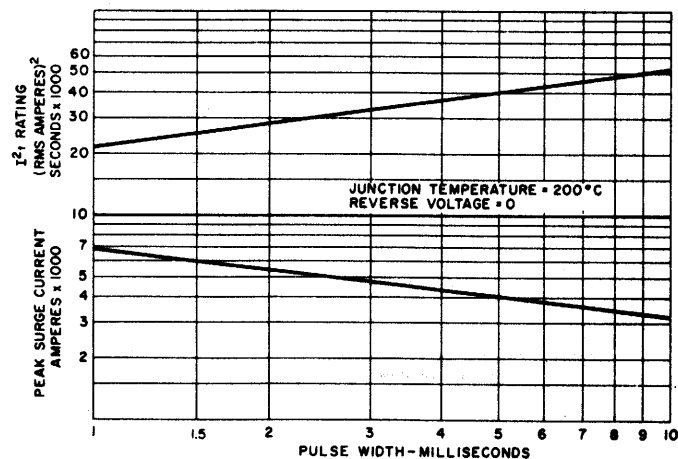


SUB-CYCLE SURGE FORWARD CURRENT
AND I^2t RATING VS. PULSE TIME
FOLLOWING RATED LOAD CONDITIONS



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

A180 (R)
Silicon Rectifier
150 Amperes Average, 1600 Volts

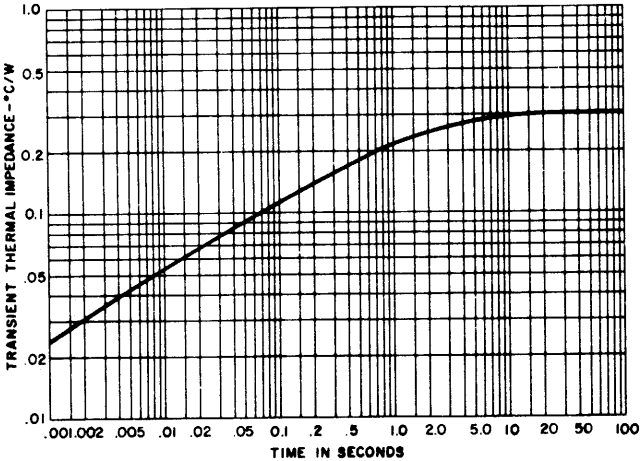

TRANSIENT THERMAL IMPEDANCE —
JUNCTION-TO-CASE