

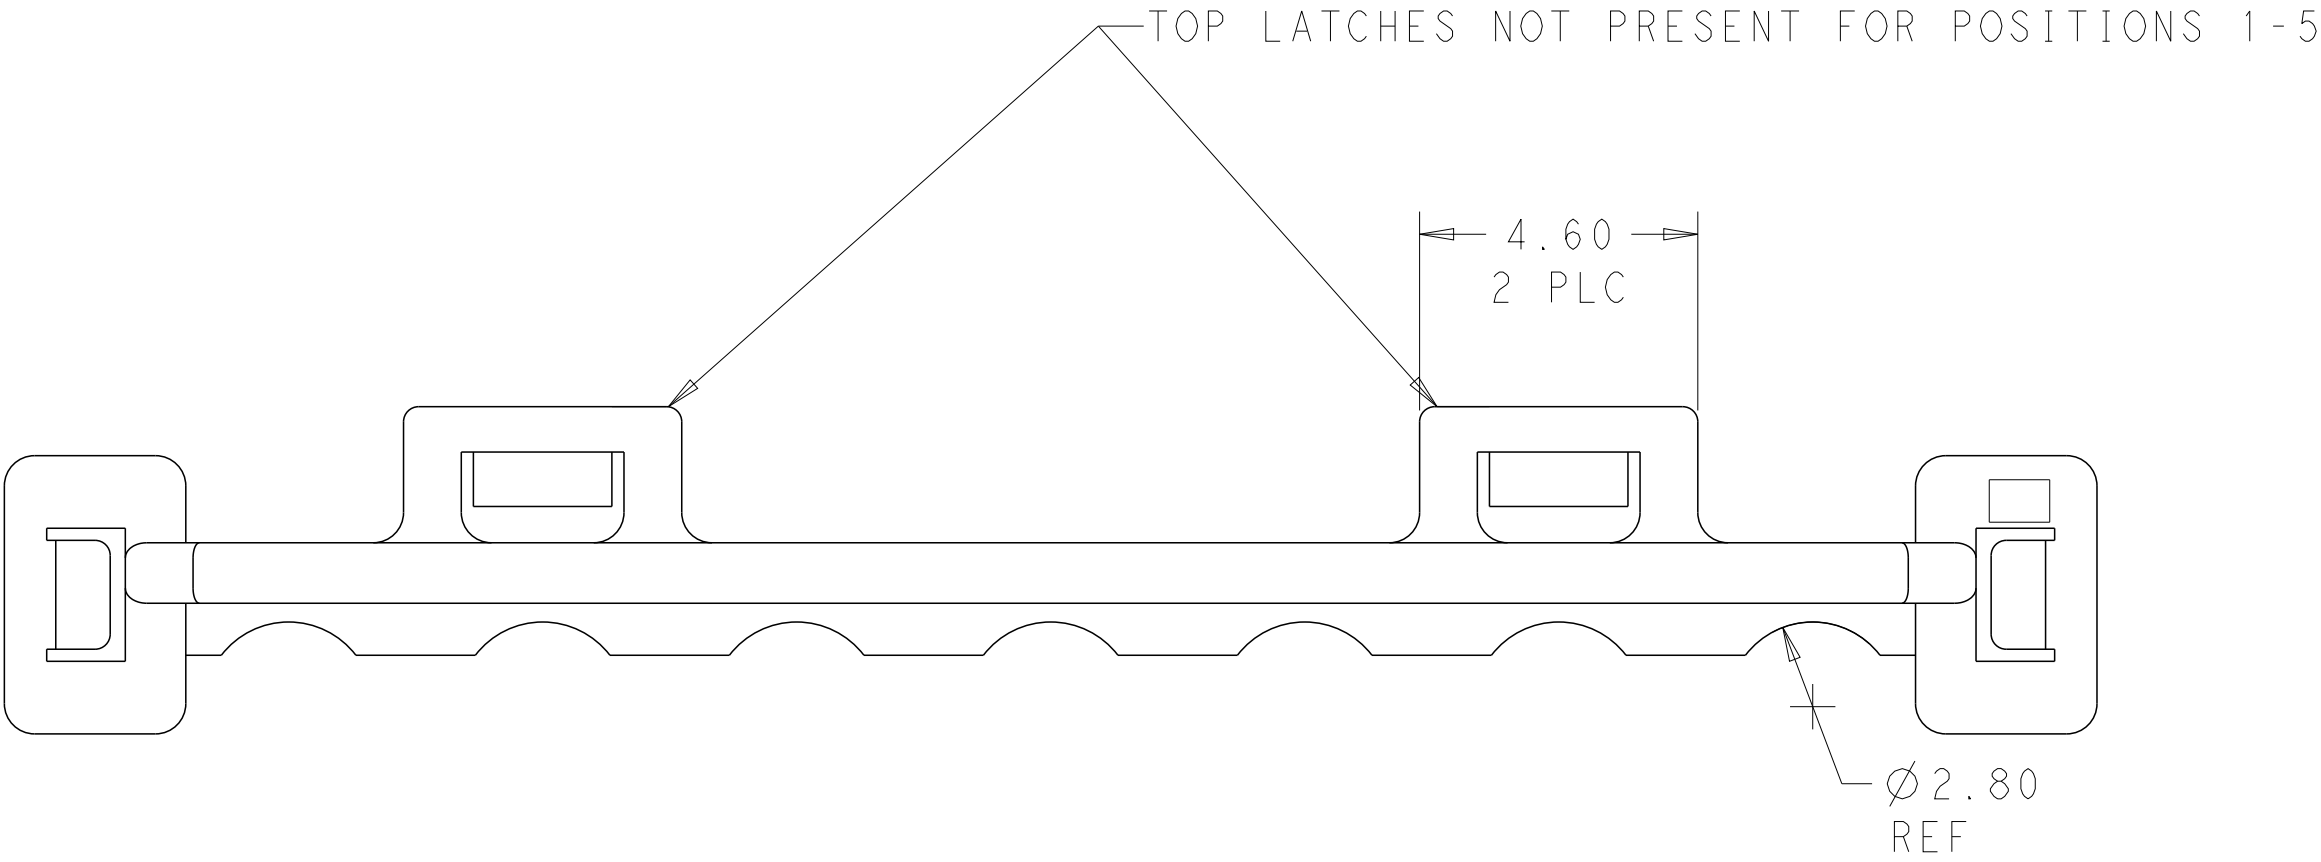
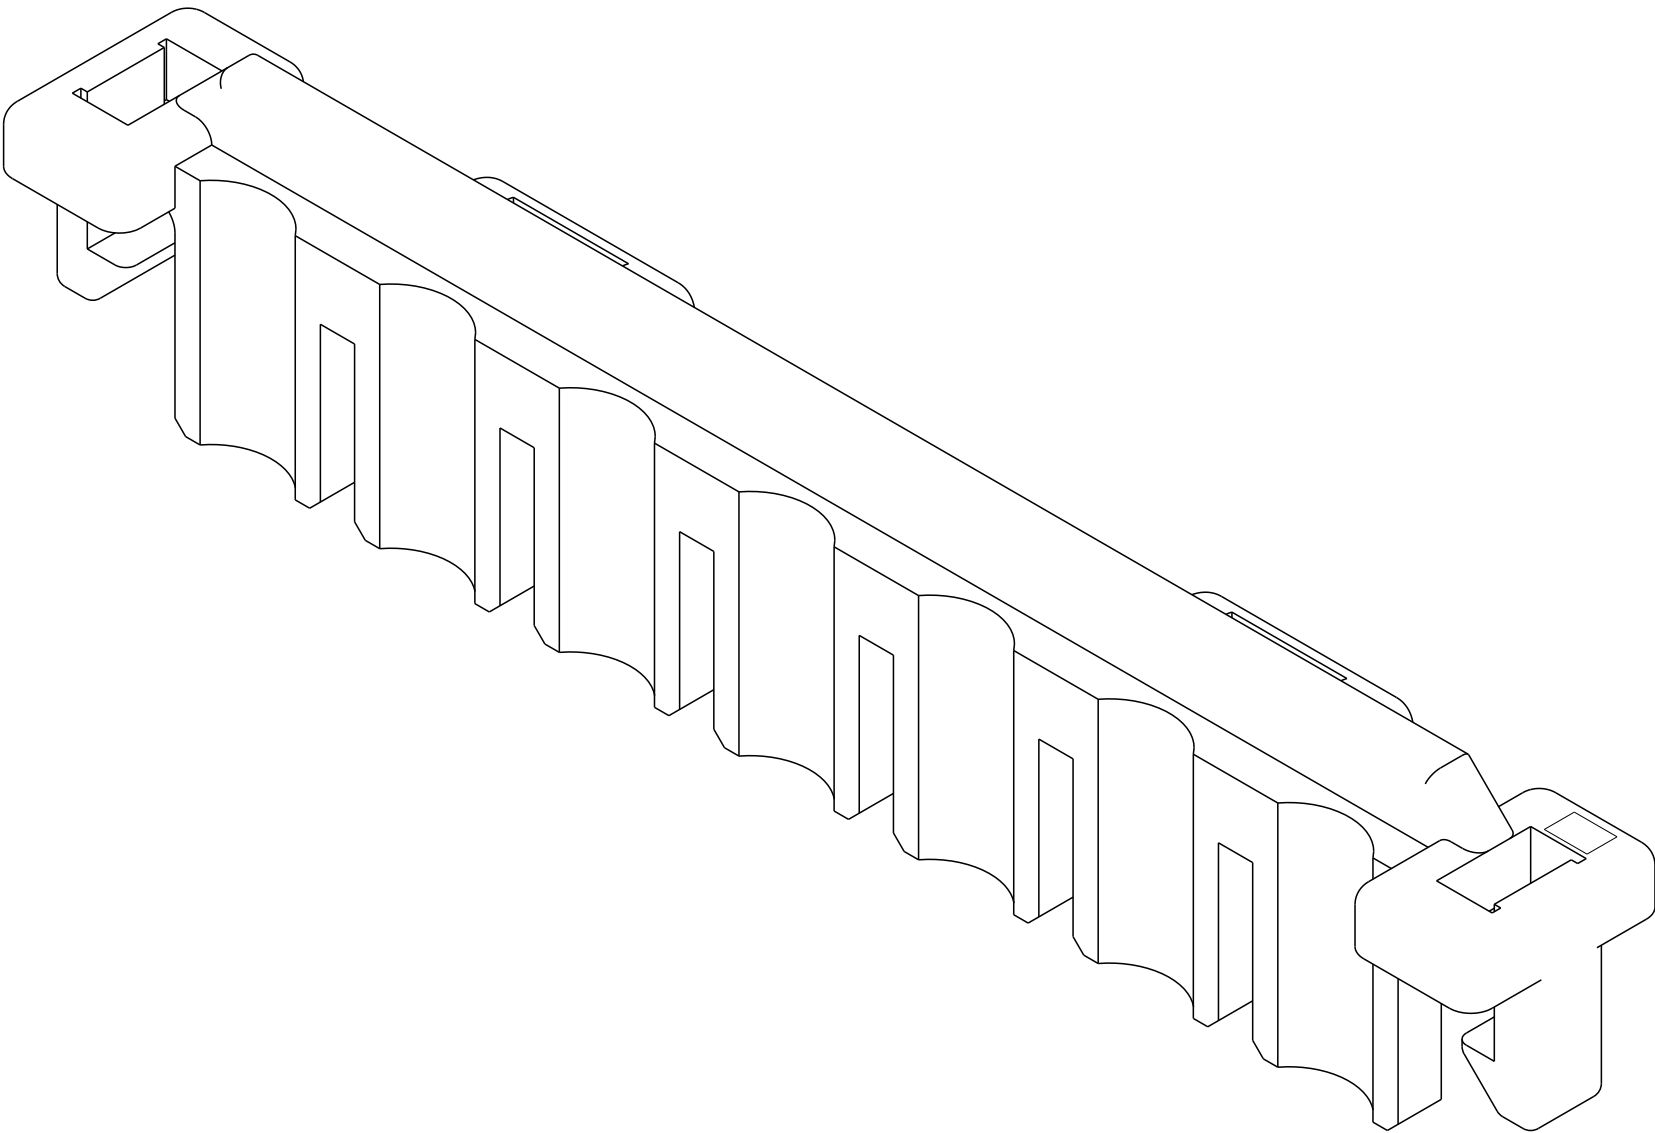


LOC	DIST	REVISIONS					
		P	LYR	DESCRIPTION	DATE	DWN	APVD
AF	-		A1	REVISED PER ECR-14-008483	11JUN2014	NK	JR

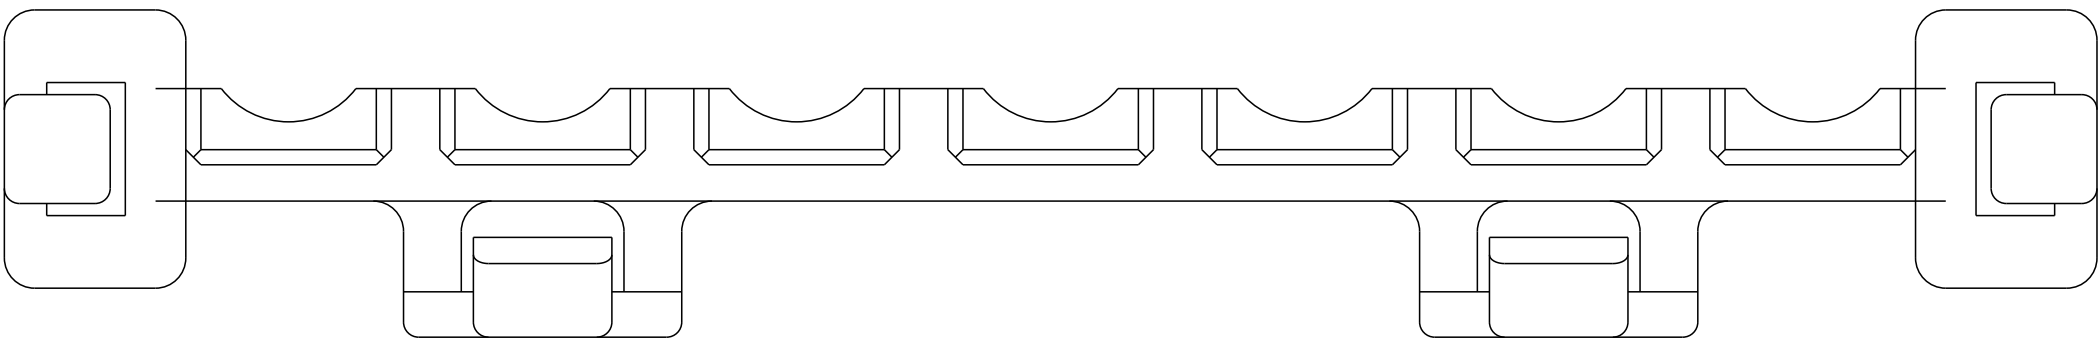

1. USE WITH VAL-U-LOK HOUSINGS.
2. FOR USE WITH #22-#18 AWG LEAD WIRE WITH INSULATION DIA 2.16-2.79MM AND INSULATION CRIMP HEIGHT OF 3.05 MIN.
3. SIDE LATCHES ONLY, NO TOP LATCHES FOR POSITIONS 1-5

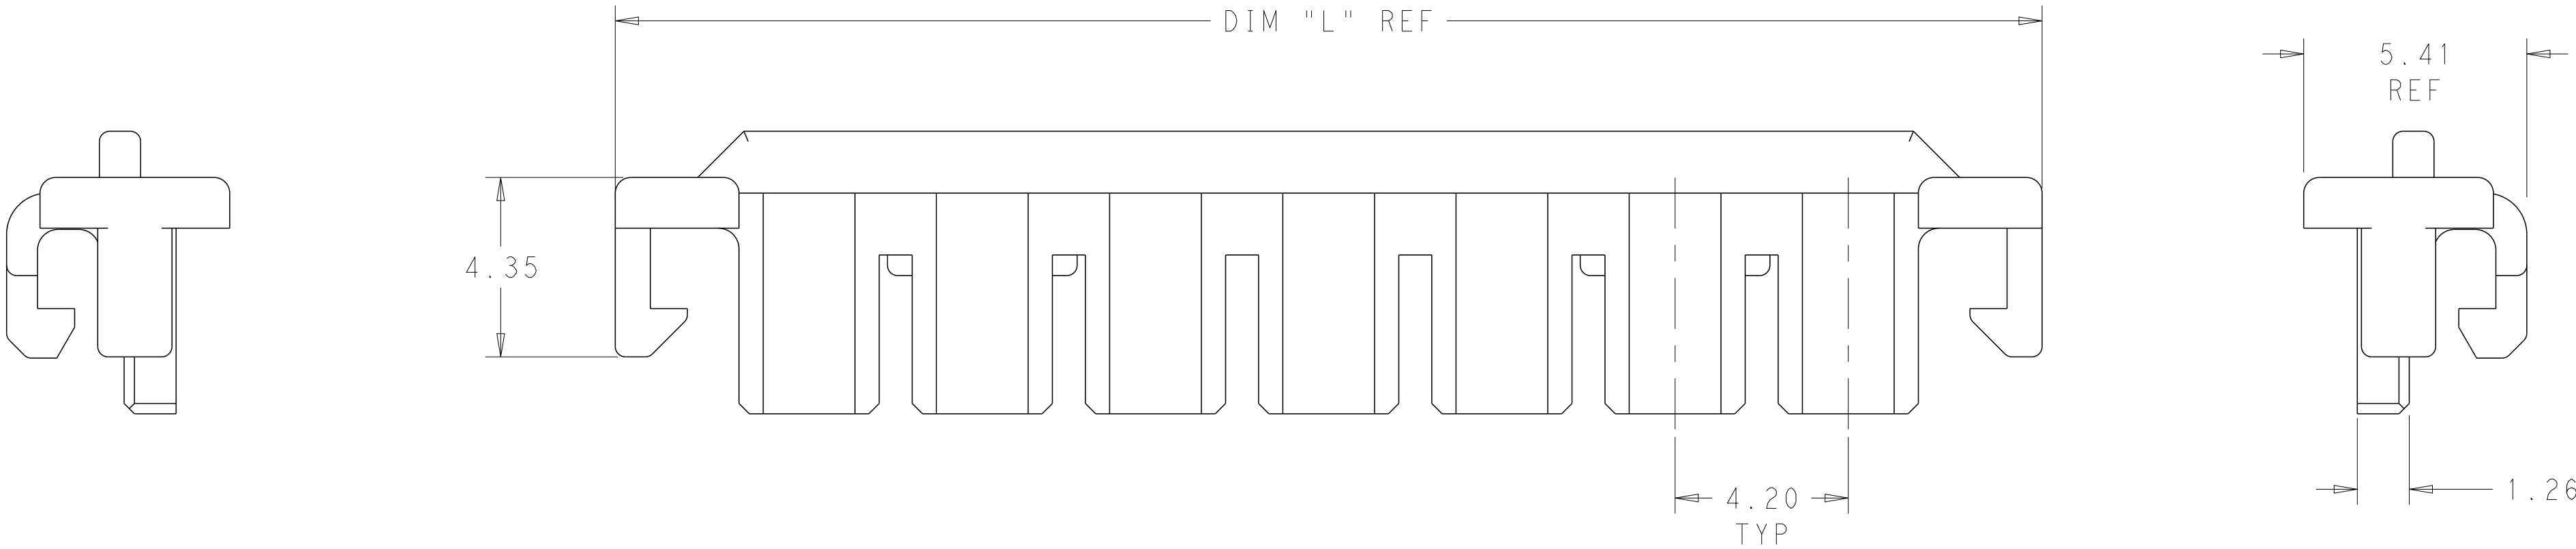

1969608-7 SHOWN HERE

55.60	12	1-1969608-2
51.40	11	1-1969608-1
47.20	10	1-1969608-0
43.00	9	1969608-9
38.80	8	1969608-8
34.60	7	1969608-7
30.40	6	1969608-6
26.20	5	1969608-5 3
22.00	4	1969608-4 3
17.80	3	1969608-3 3
13.60	2	1969608-2 3
9.40	1	1969608-1 3
DIM L	# OF POS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. EDWARDS 08JAN2013	 TE Connectivity		
DIMENSIONS:		CHK JR RUTH 03JUN13			
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD KURT RANDOLPH 04JUN13	NAME	HOUSING, TPA, VAL-U-LOK	
	0 PLC ±.3 1 PLC ±0.3 2 PLC ±0.10 3 PLC ±0.001 4 PLC ±0.0001	PRODUCT SPEC APPLICATION SPEC FINISH	SIZE CAGE CODE DRAWING NO		
MATERIAL	ANGLES ±.0001	WEIGHT -	A100779C=1969608		RESTRICTED TO -
NYLON 6/6	COLOR: BLACK	Customer Drawing	SCALE 8:1	SHEET 1 OF 1	REV A