
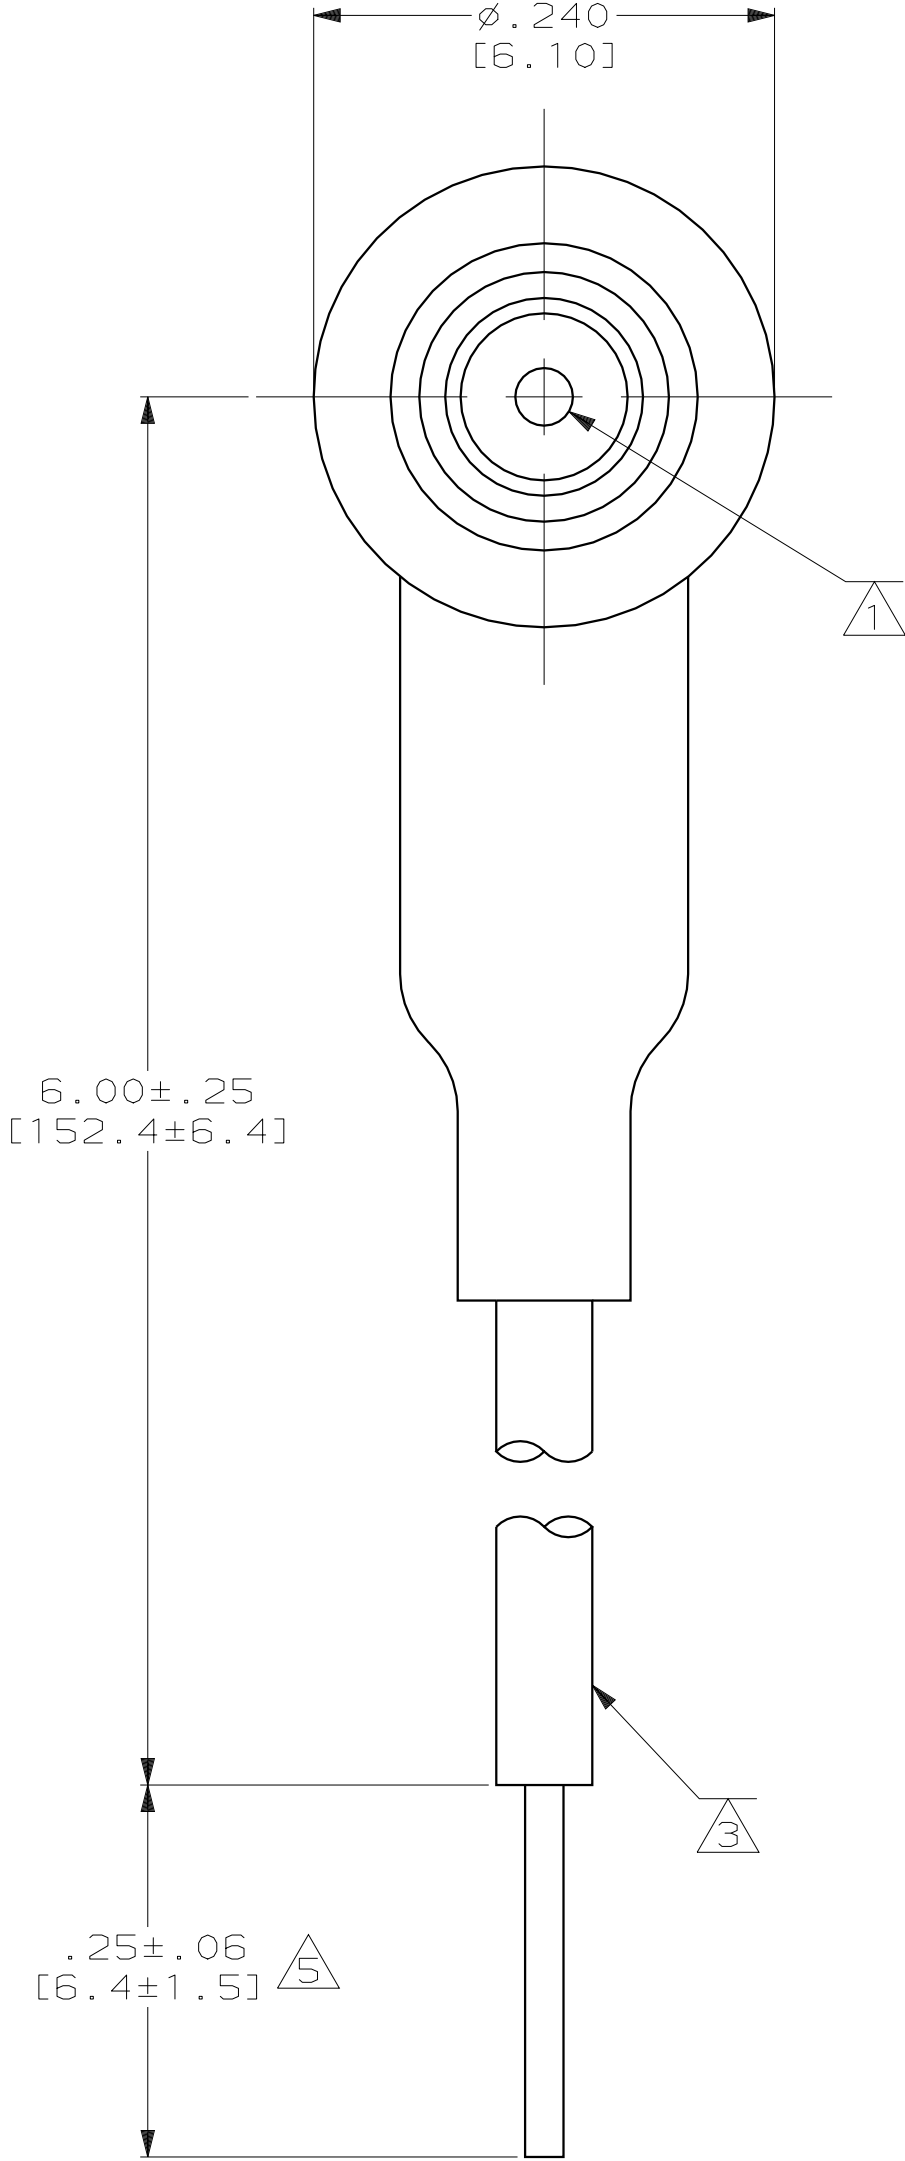


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
DF	50				C	REACTIVATE;OH14-0329-05 CT	7-21-05	DE

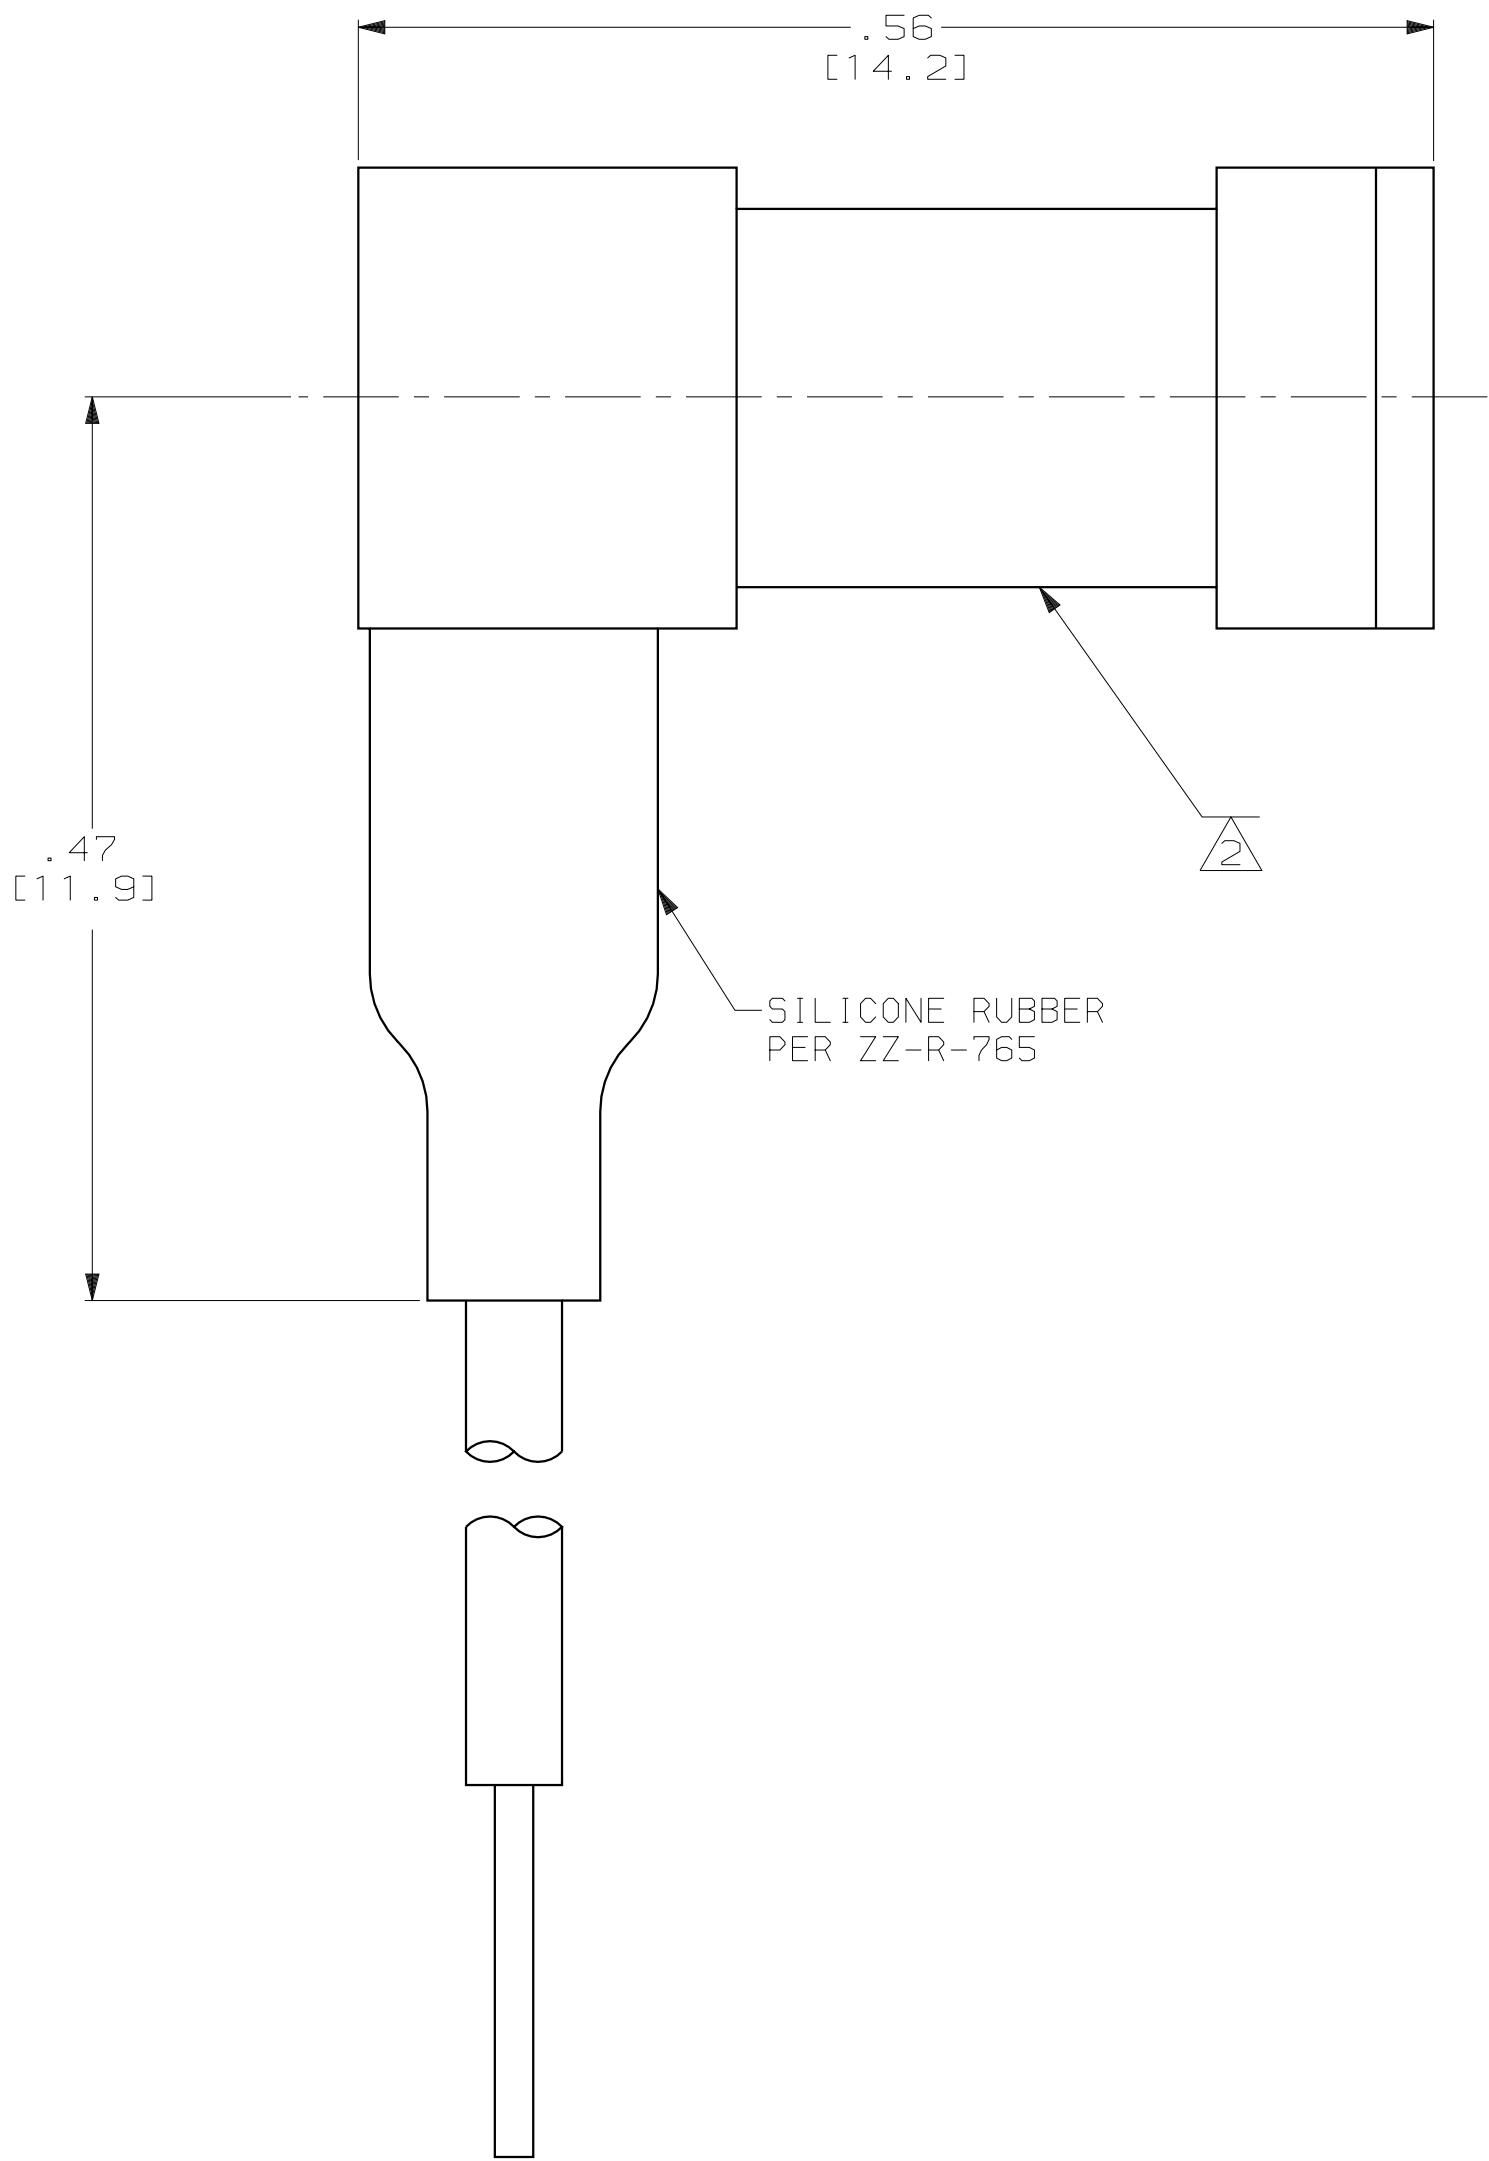

- 1

SIZE 22 PIN CONTACT: .030 [0.76] DIA
MAT'L: BRASS PER QQ-B-626.
- 2

RECEPTACLE HOUSING:
MAT'L: GLASS FILLED POLYETHERIMIDE RESIN.
- 3

CONDUCTOR:
24 (19/36) AWG SILVER PLATED COPPER
INSULATION: SILICONE COATED FEP; $\phi .060 \pm .005$ [1.52 $\pm$ 0.13]
- 4

OPERATING TEMP: -55°C TO +125°C
TEST VOLTAGE: 18 KVDC AT 70,000 FT. ALTITUDE.
OPERATING VOLTAGE: 12 KVDC AT 70,000 FT ALTITUDE.
- 5

PIGTAIL IS SOLDER DIPPED.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON : 2 PLC DEC $\pm$.02 [0.5] 3 PLC DEC $\pm$.005 [0.13] ANGLES $\pm$ -	DR 5-3-93 C.C.THOMAS	AMP AMP Incorporated Harrisburg, PA 17105-3608		
	CHK 1-11-95 D.EABY			
SEE CALLOUTS	APPD 1-11-95 D.EABY	NAME RCPT. ASSY,MICRO SUB-MINIATURE, RIGHT ANGLE,LGH		
	RLSE 9-3-02 C.C.THOMAS			
SEE CALLOUTS	PRODUCT SPEC -	SIZE C	CAGE CODE 00779	DRAWING NO C-448659
	APPLICATION SPEC -	SCALE 10:1	SHEET 1 OF 1	
	WEIGHT -			