



BASE

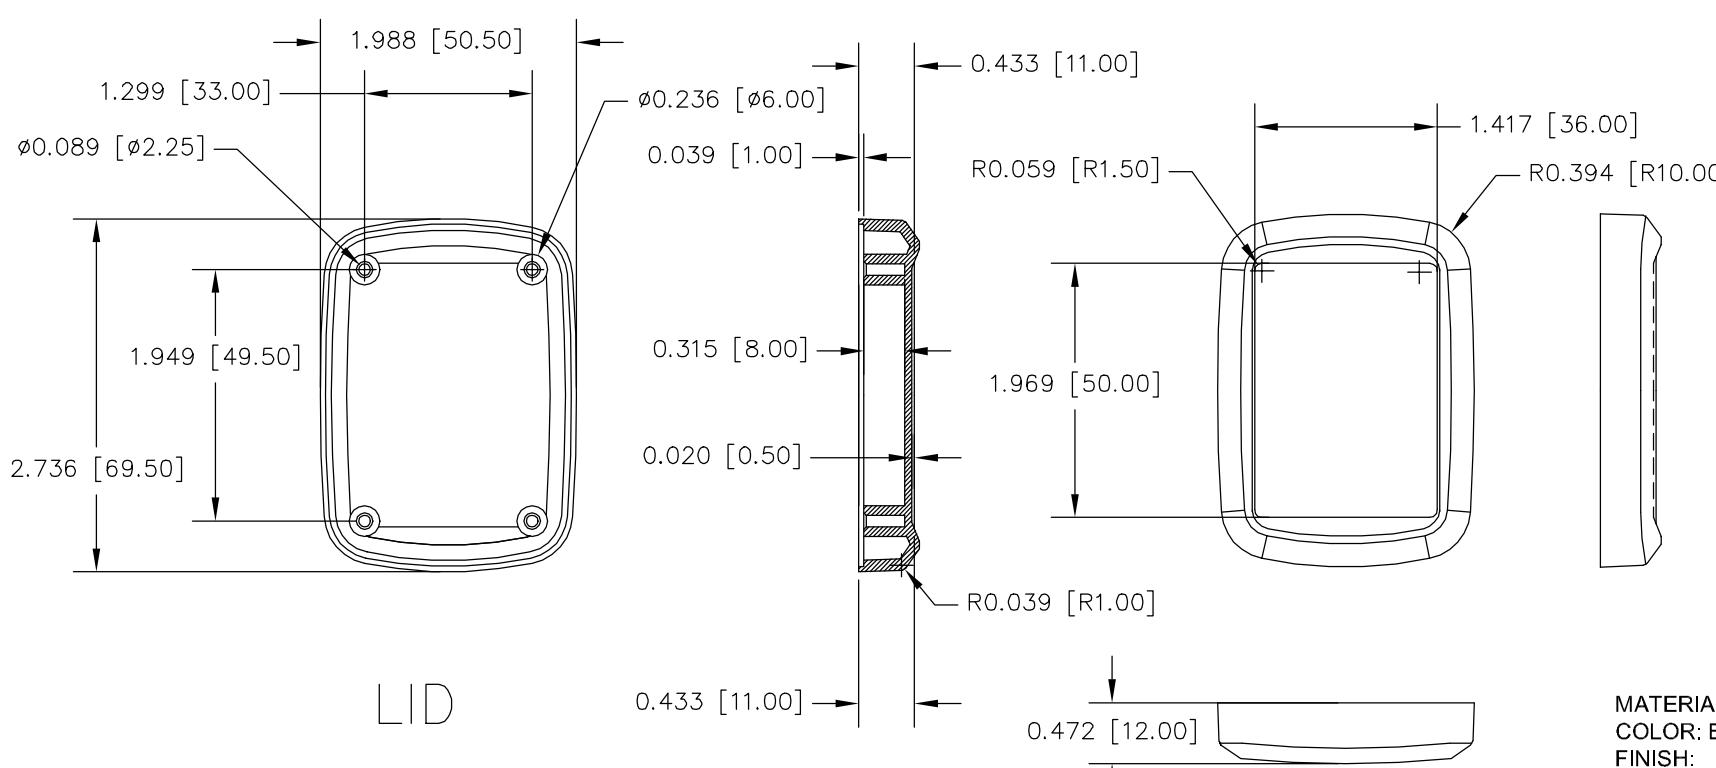

LID

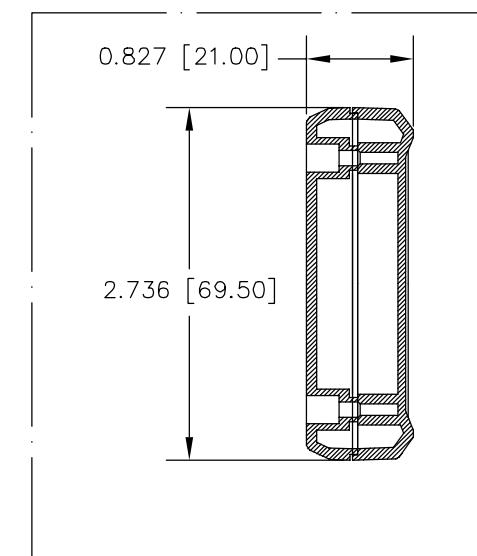

MATERIAL : FLAME RETARDANT OF ABS (UL94-V0)
COLOR: BLACK

FINISH:

SHELL EXTERIOR SURFACES ARE TEXTURED.
RECESSED AREAS ON EXTERIOR ARE SMOOTH.
FOUR (4) INTERNAL BOSSES ON EACH SHELL ARE
DESIGNED TO TRAP PCB BETWEEN ASSEMBLED
SHELL HALVES.

FOUR (4) #4 SCREWS ARE SUPPLIED FOR ASSEMBLING SHELL HALVES
ALL DIMENSIONAL TOLERANCES ARE +/- .015

ITEM	REQ'D.	PART NO.	DESCRIPTION
	<u>TOLERANCES:</u>	MAT: NOTED	NAME:
	±.005 BETWEEN HOLE CENTERS	FINISH: BLACK	HAND-HELD BOX STYLE P
	±.015 FROM SHEARED EDGE	DR. RD: 10-13-08	2.74 X 1.97 X .83
	±.032 FROM A BENT SURFACE	CH.	BUD INDUSTRIES, INC.
	±.063 BETWEEN ASSEMBLED SURFACES	APP.	WILLOUGHBY, OHIO
QTY.	USED ON	UNLESS OTHERWISE SPECIFIED	DVG. NO. HH-3641