


CUSTOMER DRAWING

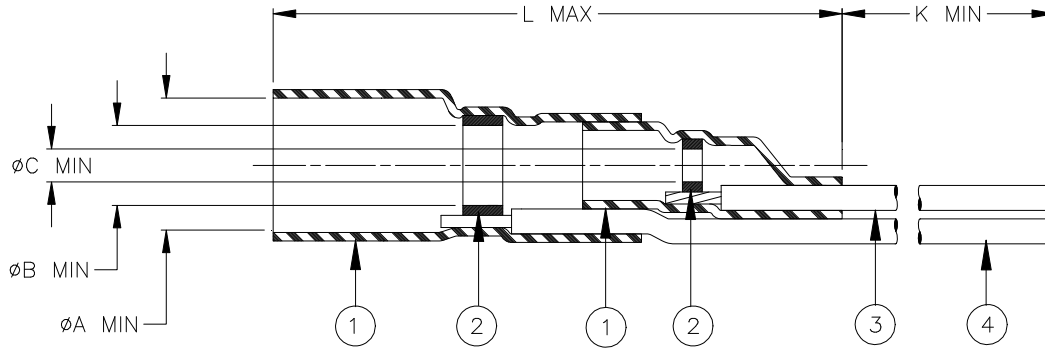


Product Revision		Product Dimensions					Cable Dimensions				
Product Name		ØA min	ØB min	ØC min	L max	K min	ØD max	ØE min	ØF min	G ±0.5 [±.02]	M±0.5 [±.02]
B-044-14	G	2.20 [.087]	1.70 [.067]	0.90 [.035]	24.00 [.945]	150.00 [5.906]	2.10 [.083]	1.30 [.051]	0.30 [.012]	19.0 [.75]	6.0 [.24]

MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- SOLDER PREFORMS WITH FLUX:
SOLDER: TYPE Sn63 per ANSI-J-STD-006.
FLUX: TYPE ROL1 per ANSI-J-STD-004.
- CONDUCTOR LEAD: Raychem 55A0111-24 in accordance with MIL-W-22759/32 AWG24 stranded tin plated copper.
Color: white
- GROUND LEAD: Raychem 55A0111-24 in accordance with MIL-W-22759/32 AWG24 stranded tin plated copper.
Color: blue

APPLICATION

- This part is designed to provide an environment protected shield termination on cables, rated for 125°C minimum, meeting the dimensional criteria listed, having tin or silverplated shields.
- Temperature range: -55°C to +150°C.
- Install using Raychem-approved convection or infrared heating tools in accordance with Raychem Installation Procedure RPIP-500-03.

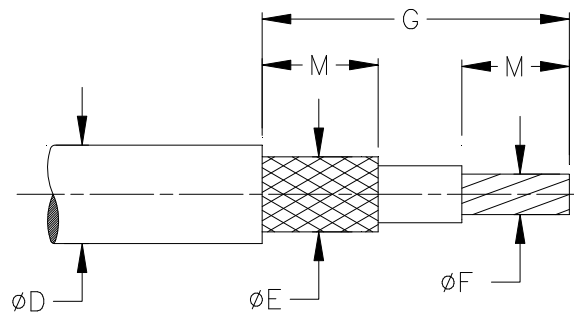

NOTE: For best results, prepare the cable as illustrated above.

 TE Connectivity		Raychem Devices	TITLE : COAXIAL SOLDERSLEEVE DEVICE WITH PRE-INSTALLED STRANDED WIRES				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN [.xxx] BRACKETS.			DOCUMENT NO.: B-044-14				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DATE: June 12, 2015		REVISED PER: ECO-15-008855	
DRAWN BY: T. NGUYEN	CAGE CODE: 06090	CAD NAME: B-044-14.doc	PROD. REV.: SEE TABLE	REVISION: B1	SIZE: A	SHEET: 1 of 1	