

Compact design requires minimal real estate and delivers excellent filtering characteristics for both differential and common mode. RoHS compliant, easily installed for a broad array of applications.

Compact design requires minimal real estate and delivers excellent filtering characteristics for both differential and common mode. RoHS compliant, easily installed for a broad array of applications.



Appliance Filters	PF50-PF53
Single Stage.....	PF54-PF69
With Wire Leads.....	PF56-PF57
With Wire Leads for Medical Applications	PF58-PF59
Higher Current	PF66-PF69
DC – Higher Current	PF70-PF71
Dual Stage.....	PF72-PF79

Power Line Filters Appliance Filters

11-MPC Series

Features

- Miniature general purpose PCB mounted filter
- Requires minimal PCB real estate space
- Low cost
- Operating temperature: -25°C to +70°C
- Two forms of cases are available:
metal case and plastic case


Applications

- Personal computers and peripherals
- Digital equipment
- Measuring instruments and medical equipment
- TV & VCR monitors and display units
- Home appliances




Circuit Diagram


Circuit 1




Circuit 2



Circuit 3



Circuit 4



Specifications

Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Circuit Diagram	Figure	Temperature Rise (Max.)
11-MPC-001-2-B	120/250VAC	1A	5uA	1	A1	30°C
11-MPC-001-5-A			0.50mA	2	A	
11-MPC-001-5-B		A1				
11-MPC-002-5-B		2A		3	D	
11-MPC-002-5-D					E	
11-MPC-003-5-E		3A		2	A1	
11-MPC-006-5-B					C	
11-MPC-006-5-C		6A		4	B	
11-MPC-016-5-B			16A			

Note: Test voltage: 1500VAC one minute, line to ground
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max. at rated current
Weight: 17.5g

PCB Power Filters Miniature Printed Circuit Board

11-MPC Series

Figure A




Figure A1




Figure B

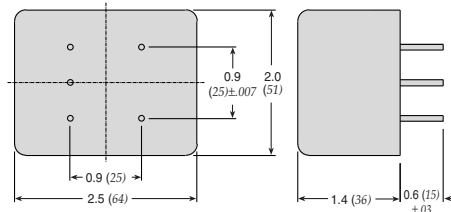


Figure C

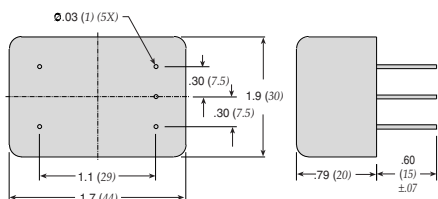


Figure D



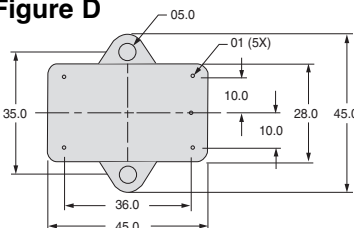


Figure E

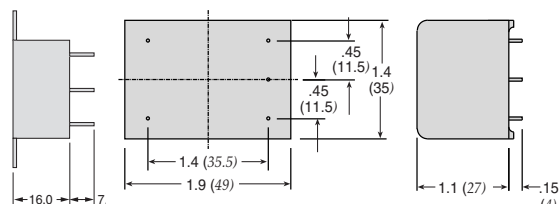


Dimensions in inches (mm)


Common Mode

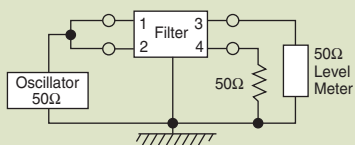


11-MPC-001;-002

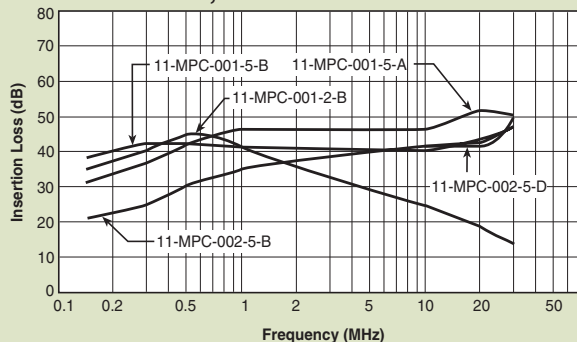


11-MPC-003;-006;-016

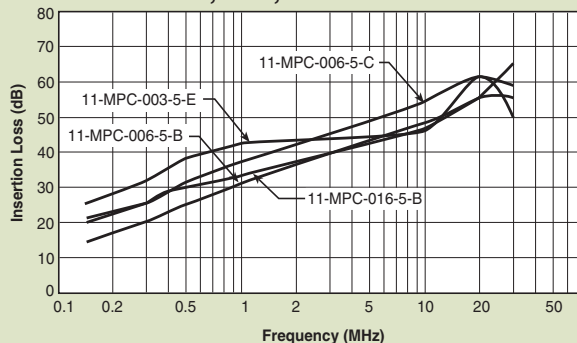


Normal Mode

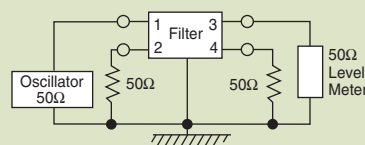

11-MPC-001;-002

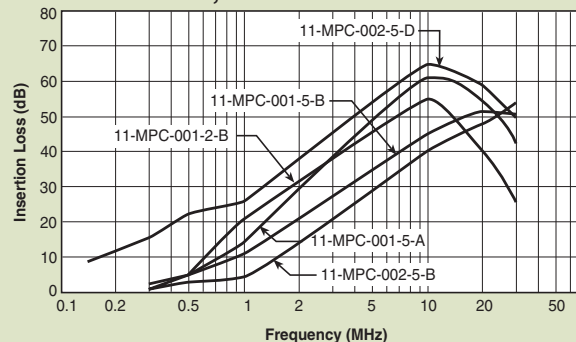

11-MPC-003;-006;-016

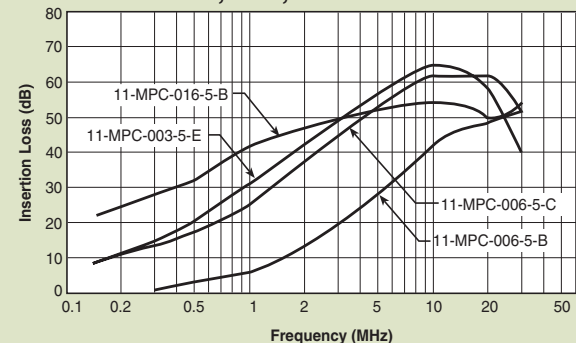

Power Line Filters Appliance Filters

62-AL/62-AC Series



Tested and found to be
IAW VDE 0565 Part 3

Features

- Low-cost plastic case
- Compact design requires minimal real estate space
- Suitable for products that must conform to FCC regulations
- Wide variety of circuit and filtering options
- Good filtering characteristics for both normal mode and common mode
- Epoxy molded for reliability
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF53)

Applications


- Personal computers and peripherals
- Digital equipment
- Industrial equipment
- Vending machines
- Home appliances
- Office equipment

Specifications

Model*	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)
				C _Y	C _X		
62-AFL-010-3-11	250VAC	1.0A	0.35mA	2200pF	0.1uF	11.0mH	40°C
62-AFC-010-3-11			0.50mA	3300pF			
62-AFL-010-5-11		1.6A	0.35mA	2200pF		6.0mH	
62-AFC-010-5-11			0.50mA	3300pF			
62-AFL-016-3-11		3.0A	0.35mA	2200pF		2.4mH	
62-AFC-016-3-11			0.50mA	3300pF			
62-AFL-016-5-11		4.5A	0.35mA	2200pF		1.0mH	
62-AFC-016-5-11			0.50mA	3300pF			
62-AFL-030-3-11		6.0A	0.35mA	2200pF		0.53mH	
62-AFC-030-3-11			0.50mA	3300pF			
62-AFL-030-5-11			0.35mA	2200pF			
62-AFC-030-5-11			0.50mA	3300pF			
62-AFL-045-3-11			0.35mA	2200pF			
62-AFC-045-3-11			0.50mA	3300pF			
62-AFL-045-5-11			0.35mA	2200pF			
62-AFC-045-5-11			0.50mA	3300pF			


Note: All types are designed to meet the requirement of UL 1283, CSA 22.2. VDE 0565-3
Test voltage: 1500VAC one minute, line to ground
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max.

* Available with bleeder resistor
Replace F with R for part number

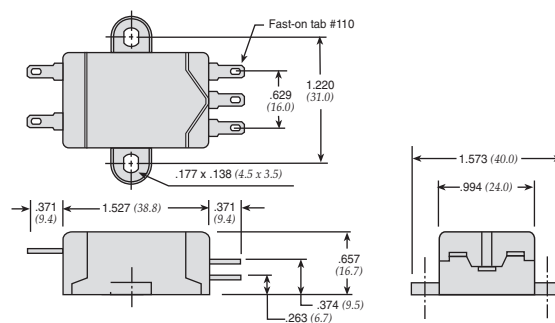

Dimensions in inches (mm)


Circuit Diagrams

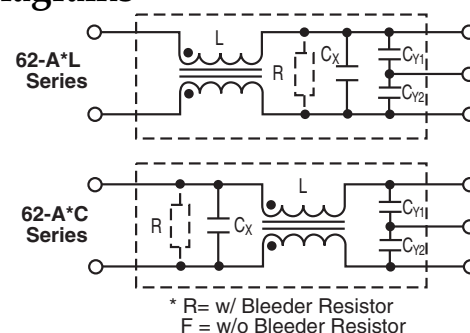


Power Line Filters Appliance Filters

62-AL/62-AC Series


Common Mode

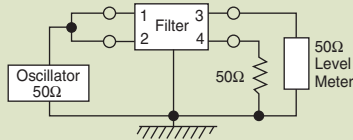


62-AFL-xxx-3-11

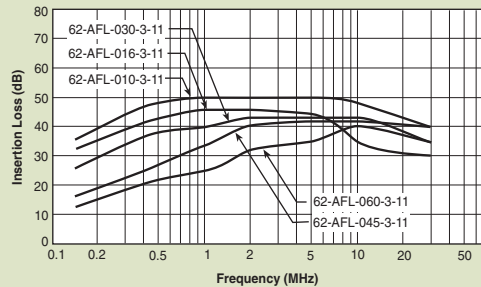


62-AFC-XXX-3-11

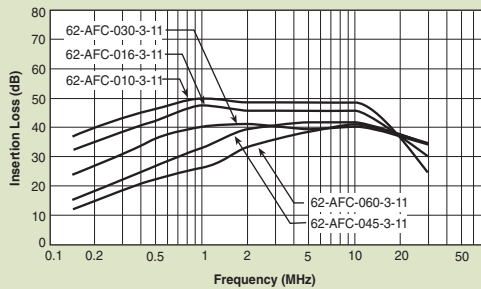


62-AFL-xxx-5-11

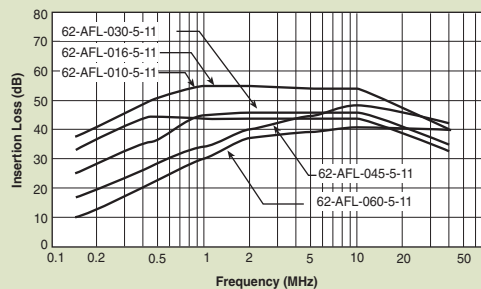


62-AFC-xxx-5-11

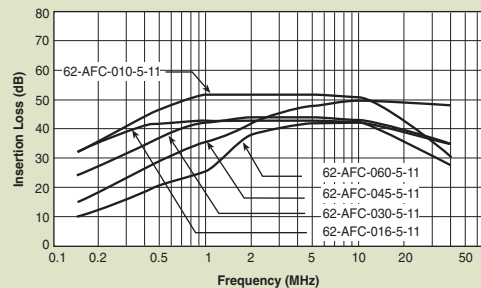


Temperature Characteristics

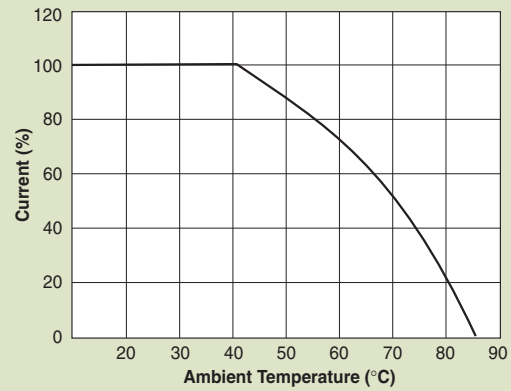


Normal Mode

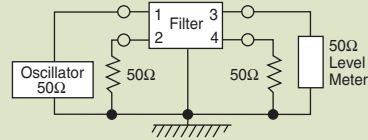


62-AFL-XXX-3-11

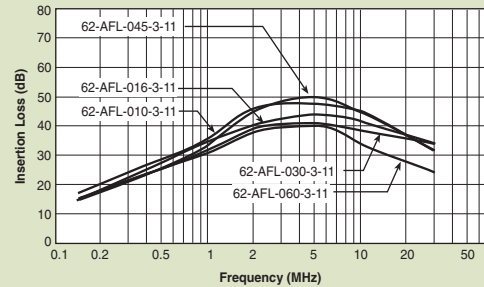


62-AFC-XXX-3-11

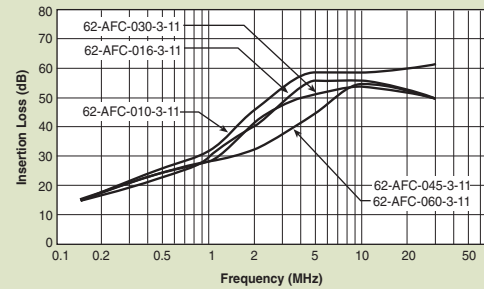

62-AFL-xxx-5-11

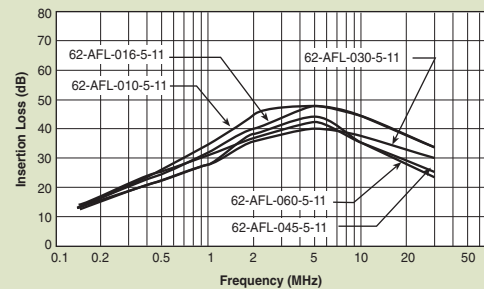

62-AFC-xxx-5-11

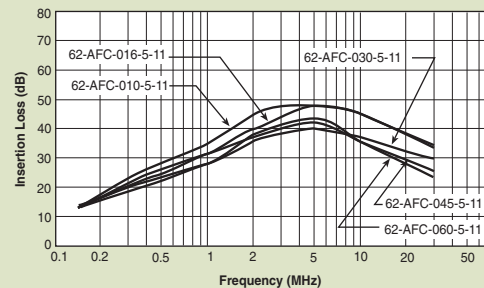

Power Line Filters Single Stage

62-PPF/PQF/PRF Series



Tested and found to be
IAW VDE 0565 Part 3

Features


- Low-cost plastic case
- Compact design requires minimal real estate space
- Suitable for products that must conform to FCC and FTZ regulations
- Wide variety of circuit and filtering options
- Good filtering characteristics for both normal mode and common mode
- Epoxy molded for reliability
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF55)

Applications

- Personal computers and peripherals
- Digital equipment
- Industrial equipment
- Vending machines
- Office equipment



Circuit Diagrams

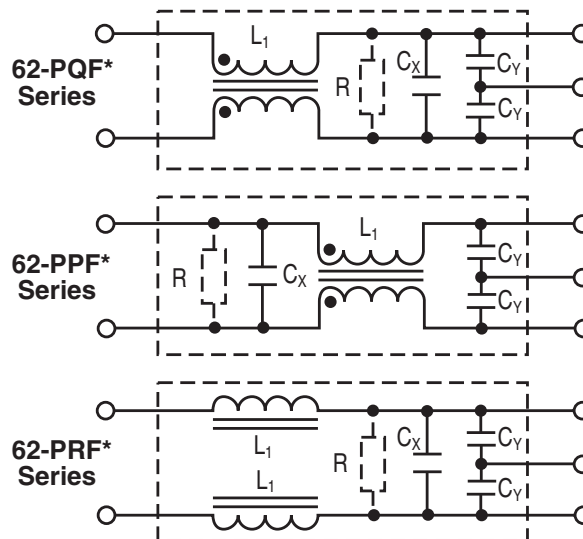

* Bleeder Resistor is available only for
62-P(Q/R/P)F-XXX-X-12

Specifications

Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)
				C _Y	C _X		
62-PQF-020-5-11	250VAC	2A	0.50mA	3300pF	0.1uF	15mH	30°C
62-PQF-020-5-12					.22uF		
62-PPF-020-5-11					0.1uF		
62-PPF-020-5-12					.22uF		
62-PQF-030-5-11		3A			0.1uF	8mH	
62-PQF-030-5-12					.22uF		
62-PPF-030-5-11					0.1uF		
62-PPF-030-5-12					.22uF		
62-PQF-060-5-11		6A			0.1uF	2.1mH	
62-PQF-060-5-12					.22uF		
62-PPF-060-5-11					0.1uF		
62-PPF-060-5-12					.22uF		
62-PRF-010-5-11		1A			0.1uF	486uH	
62-PRF-010-5-12					.22uF		
62-PRF-020-5-11		2A			0.1uF	181uH	
62-PRF-020-5-12					.22uF		
62-PRF-030-5-11		3A			0.1uF	97uH	
62-PRF-030-5-12					.22uF		

Note: All types are designed to meet the requirement of UL 1283, CSA 22.2, VDE 0565-3

Test voltage: 1500VAC one minute, line to ground

Insulation resistance: 300 Mohm min. at 500VDC

Voltage drop: 1V max. (except 62-PRF-010-5-11) at rated current

62-PRF-010-5-11: 1.5V max. at rated current



Weight: 62-PPF & PQF Series: 2.11 ounces (60 grams)

62-PRF Series: 1.76 ounces (50 grams)


Power Line Filters Single Stage

62-PPF/PQF/PRF Series


Temperature Characteristics

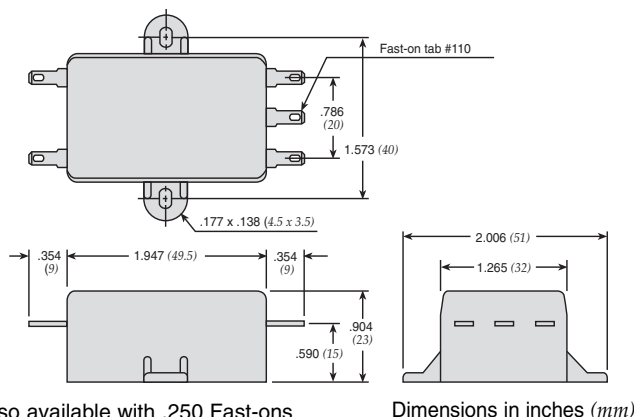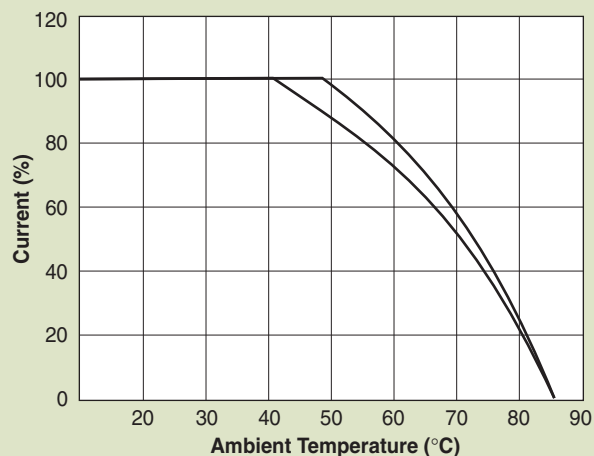


Normal Mode

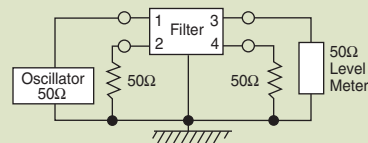


62-PQF Series

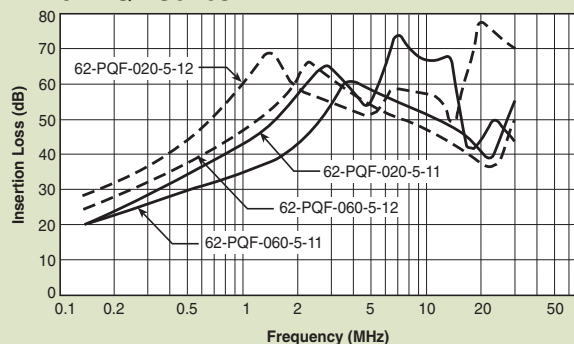


62-PPF Series

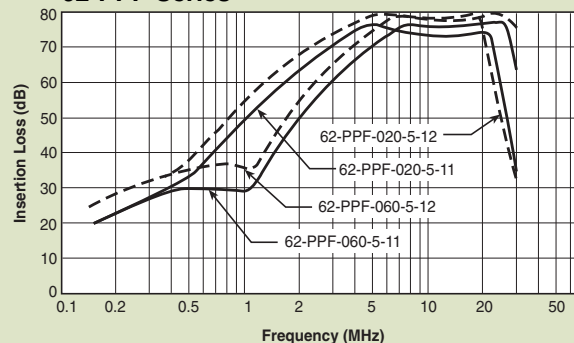


Common Mode

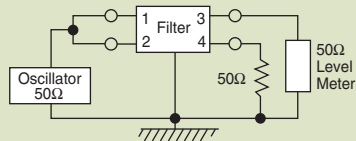

62-P(Q/R)F Series

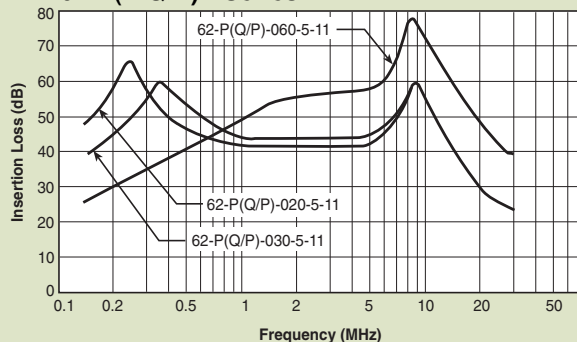

62-PRF Series

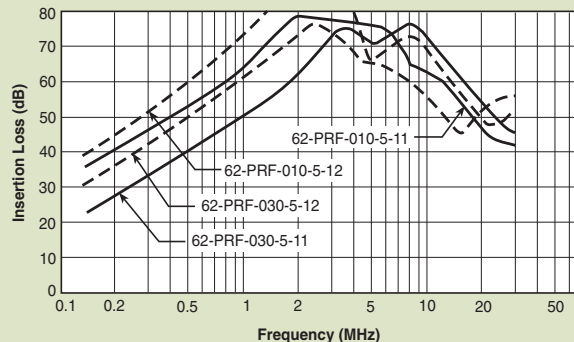

Power Line Filters Single Stage Wire Leads

62-PML Series



Tested and found to be
IAW VDE 0565 Part 3

Features


- Compact design requires minimal real estate space
- Suitable for products that must conform to FCC and FTZ regulations
- Excellent attenuation for high voltage impulse
- Metal case provides effective shielding
- Excellent filtering characteristics for both normal mode and common mode
- Structure provides effective shielding for noise generated externally and internally
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF57)

Applications

- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Medical equipment
- Factory automation equipment



Circuit Diagram

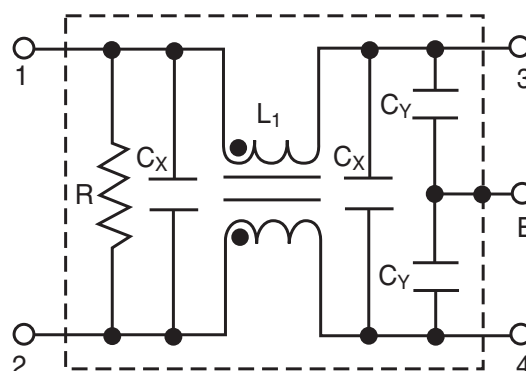

Specifications

Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)
				C _Y	C _X		
62-PML-015-3-11	250VAC	1.5A	0.35mA	2200pF	0.1uF	10.0mH	30°C
62-PML-015-5-11			0.50mA	3300pF			
62-PML-030-3-11		3A	0.35mA	2200pF		4.3mH	
62-PML-030-5-11			0.50mA	3300pF			
62-PML-050-3-11		5A	0.35mA	2200pF		2.4mH	
62-PML-050-5-11			0.50mA	3300pF			

Note: All types are designed to meet the requirement of UL 1283, CSA 22.2. VDE 0565-3

Test voltage: 1500VAC one minute, line to ground

Insulation resistance: 300 Mohm min. at 500VDC

Voltage drop: 1V max. at rated current

Weight: 62-PML-015 Series: 3.06 ounces (87 grams)

62-PML-030 Series: 3.17 ounces (90 grams)



62-PML-050 Series: 3.28 ounces (93 grams)

Discharge time: 0.4 sec. max.

Power Line Filters Single Stage Wire Leads



62-PML Series

Temperature Characteristics

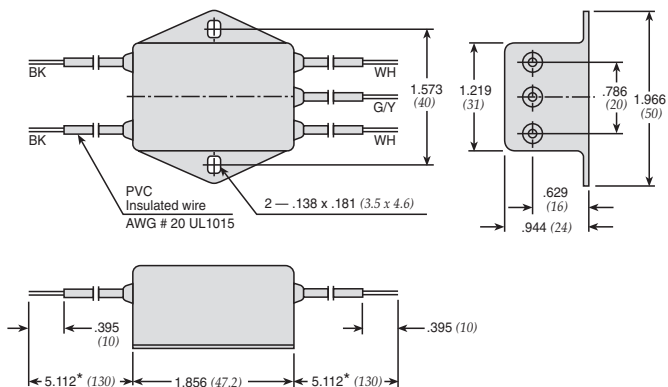
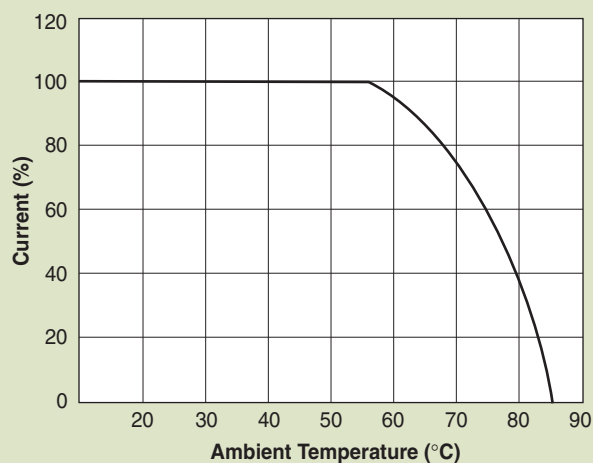


* Custom lengths available upon request. Dimensions in inches (mm)

Common Mode

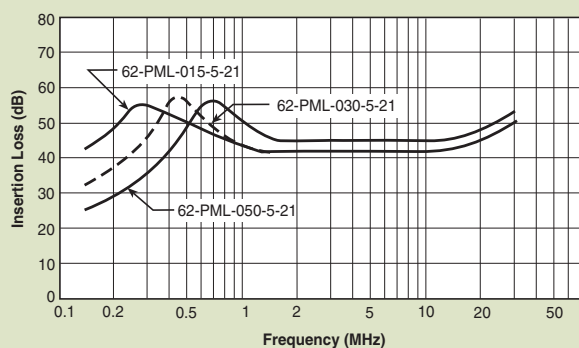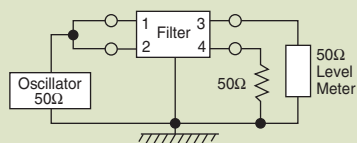

Normal Mode

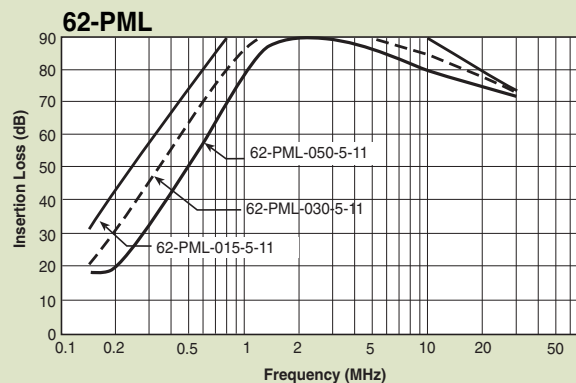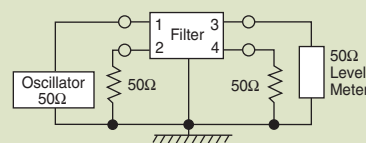

Power Line Filters Single Stage Wire Leads

for Medical Purpose Applications

12-PML & 12-PMF Series



Features

- Compact design requires minimal real estate space
- Suitable for products that must conform to FCC and FTZ regulations
- Excellent attenuation for high voltage impulse
- Metal case provides effective shielding
- Excellent filtering characteristics for both normal mode and common mode
- Structure provides effective shielding for noise generated externally and internally
- Operating temperature: -25°C to +70°C
- Low leakage current


Applications

- Digital equipment
- Personal computers and peripherals
- Measuring instruments
- Medical equipment
- Factory automation equipment




Circuit Diagram

Circuit 1



Circuit 2



Specifications

Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Circuit Diagram	Figure	Temperature Rise (Max.)	
12-PML-001-2-A	120/250VAC	1A	5uA	1	A	30°C	
12-PML-002-2-A		2A					
12-PML-006-2-A		6A					
12-PML-010-2-A		10A					
12-PMF-001-2-B		1A		2	B		
12-PMF-002-2-B		2A					
12-PMF-006-2-B		6A					
12-PML-001-2-C		1A		1	C		

Note: All types are designed to meet the requirement of UL 1283, CSA 22.2. VDE 0565-3

Test voltage: 1500VAC one minute, line to ground

Insulation resistance: 300 Mohm min. at 500VDC

Voltage drop: 1V max. at rated current

Discharge time: 0.4 sec. max.

Power Line Filters Single Stage Wire Leads

for Medical Purpose Applications

12-PML & 12-PMF Series

Figure A

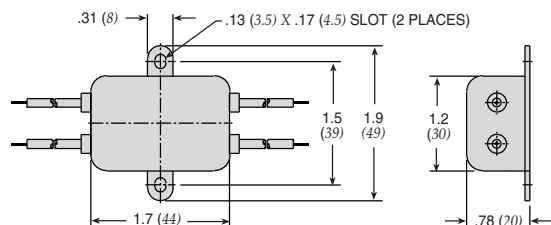


Figure C



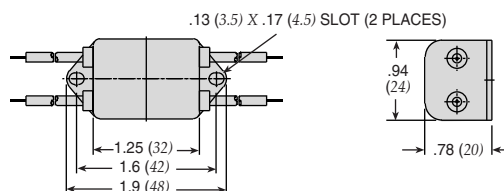


Figure B

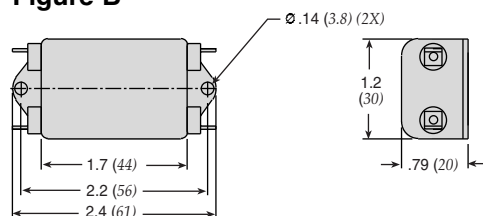


Dimensions in inches (mm)


Common Mode

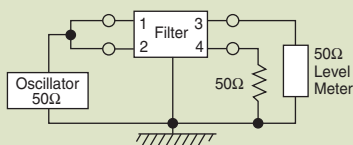


12-PML-001;-002;-006;-010

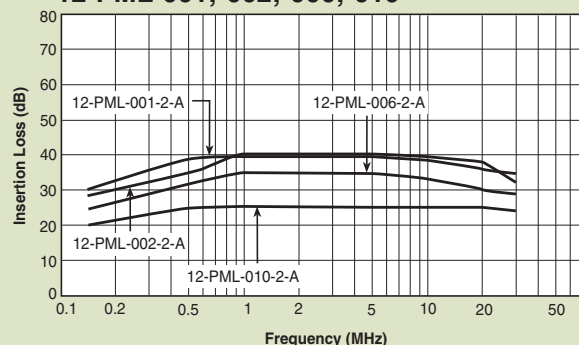


12-PMF-001;-002;-006;-010

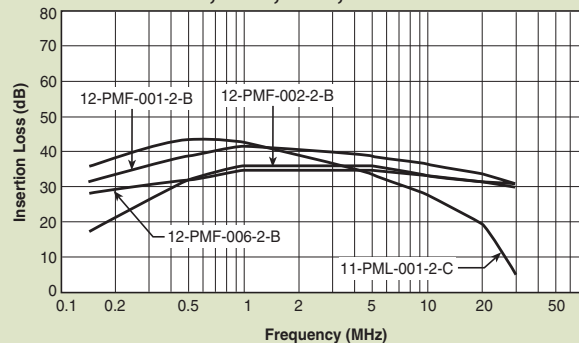


Normal Mode

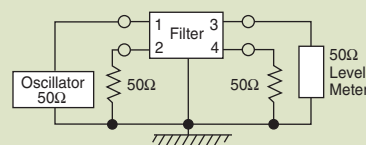

12-PML-001;-002;-006;-010

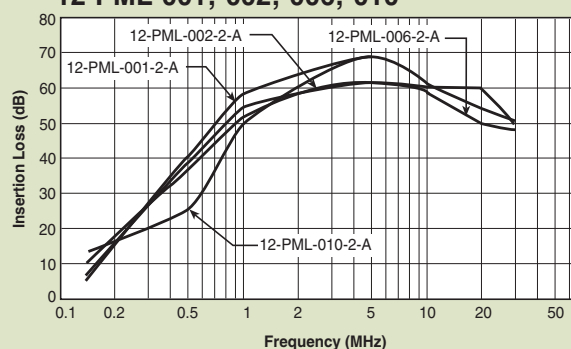

12-PMF-001;-002;-006;-010

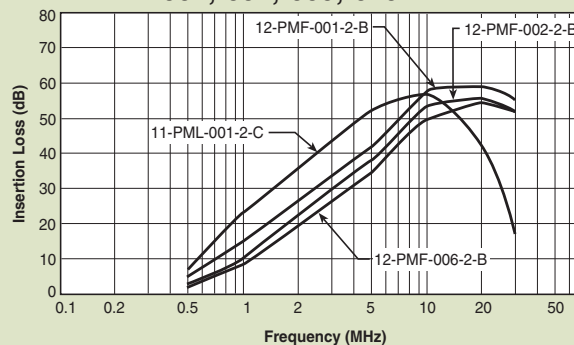

Power Line Filters Single Stage

62-LMF & LMB Series



Tested and found to be
IAW VDE 0565 Part 3

Features


- Space saving, compact designs
- Suitable for products that must conform to FCC and FTZ regulations
- Excellent filtering characteristics for both normal mode and common mode
- Structure provides effective shielding for noise generated externally and internally
- Metal case provides effective shielding
- Rugged construction
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF61)

Applications

- Digital equipment
- Office automation equipment, such as copy and fax machines
- Computers and peripherals
- Instrumentation and controls



Circuit Diagram

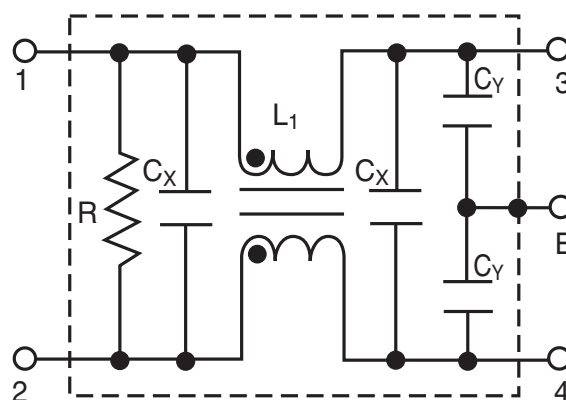

Specifications

Model*	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)
				C _Y	C _X		
62-LMB-030-5-11	250VAC	3A	0.50mA	3300pF	0.1uF	14mH	45°C
62-LMF-030-5-11		5A			0.1uF & .22uF	7.0mH	
62-LMB-050-5-11							
62-LMF-050-5-11		8A			.22uF	4.2mH	
62-LMB-080-5-11							
62-LMF-080-5-11		10A			.33uF	2.2mH	
62-LMB-100-5-11							
62-LMF-100-5-11							


Note: Test voltage: 1500VAC one minute, line to ground
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max. at rated current
Discharge time: 0.4 sec. max.
Weight: 5.3 ounces (150 grams)

*62-LMF - designates Fast-on terminals
62-LMB - designates Bolt-in terminals
62-LML - wire lead in/outputs also available


Power Line Filters Single Stage

62-LMF & LMB Series


Temperature Characteristics

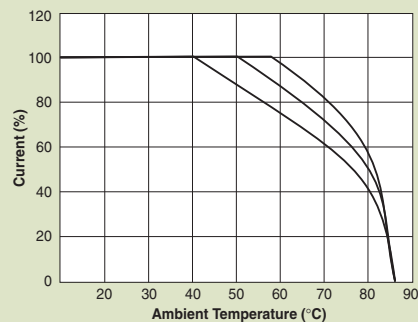

62-LMB

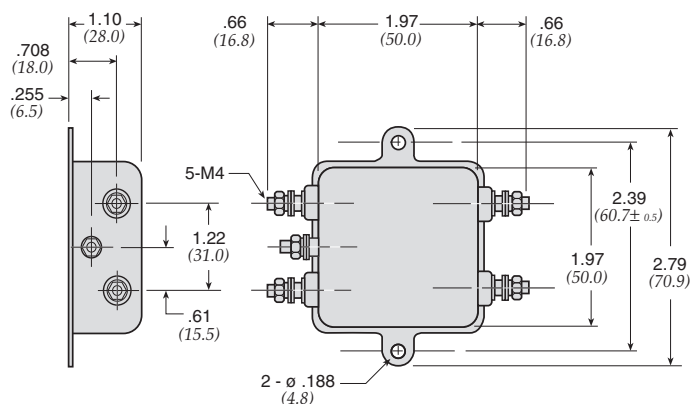


62-LMF

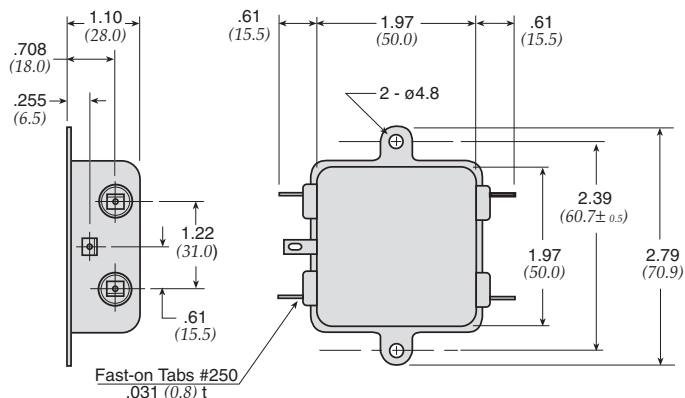


Dimensions in inches (mm)


Common Mode

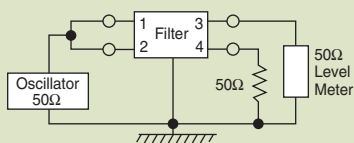


62-LMF & LMB

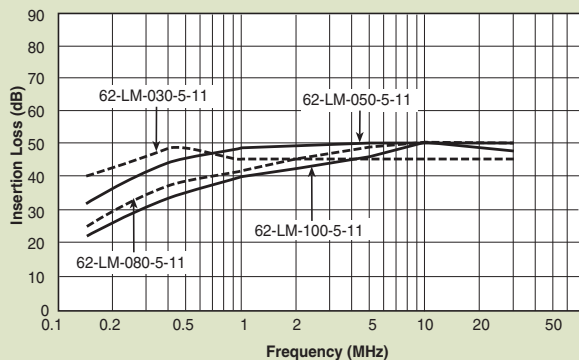

Normal Mode

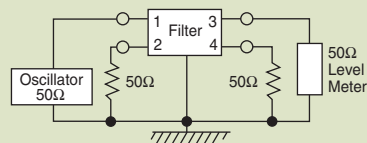

62-LMF & LMB

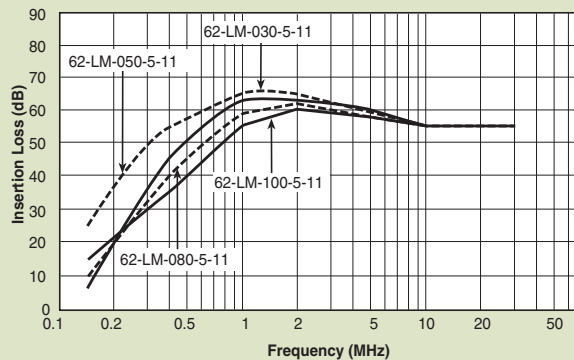

Power Line Filters Single Stage

62-PMF & PMB Series



Tested and found to be
IAW VDE 0565 Part 3

Features


- Space-saving, compact designs
- Suitable for products that must conform to FCC regulations
- Excellent attenuation for high voltage impulse
- Metal case provides effective EMI shielding
- Excellent filtering characteristics for both normal mode and common mode
- Epoxy molded for internal component reliability
- Structure provides effective shielding for noise generated externally and internally
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF63)

Applications

- Digital equipment
- Computers and peripherals
- Measuring instruments
- Medical equipment
- Equipment requiring very high impulse attenuation
- Factory automation equipment
- Industrial equipment such as UPS, inverters and converters
- Telecommunications equipment
- Office automation equipment, such as copy and fax machines



Circuit Diagram

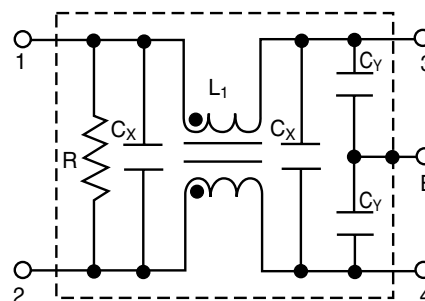

Specifications

Model*	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)
				C _Y	C _X		
62-PMB-050-5-11	250VAC	5A	0.50mA	3300pF	0.1uF	14mH	45°C
62-PMF-050-5-11		8A			.1uF	7.0mH	
62-PMB-080-5-11							
62-PMF-080-5-11							
62-PMB-100-5-12		10A			.22uF	4.2mH	45°C
62-PMF-100-5-12		15A					
62-PMB-150-5-13							
62-PMF-150-5-13		20A			.33uF	2.2mH	
62-PMB-200-5-13						1.8mH	
62-PMF-200-5-13							45°C**

Note: Test voltage: 1500VAC one minute, line to ground
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max.
Discharge time: 0.4 sec. max.
Weight: 8.82 ounces (250 grams)

* PMF - designates Fast-on terminals


PMB - designates Bolt-in terminals

** The temperature rise of 20 amp units can be decreased to 30°C by mounting on 200 X 200 x 1.0(mm) steel chassis


Power Line Filters Single Stage

62-PMF & PMB Series


Temperature Characteristics

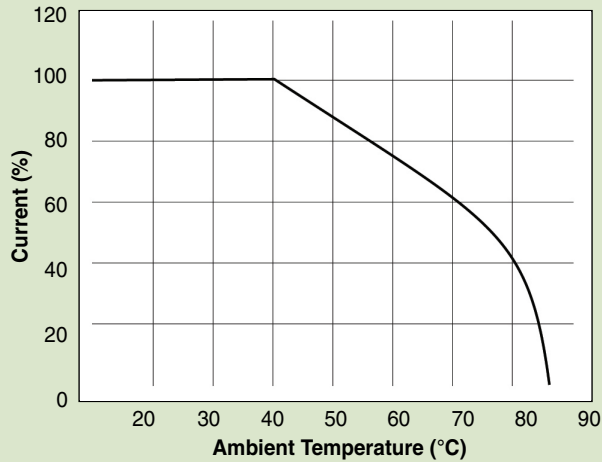

62-PMF

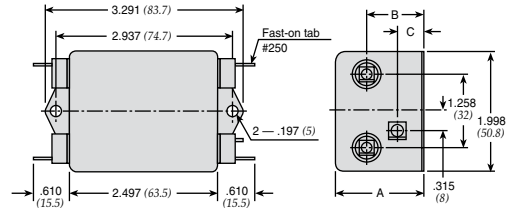



62-PMB

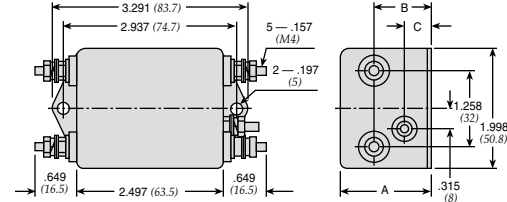



MODEL	A	B	C
62-PMF/PMB-100-200	1.490 (38)	.944 (24)	.433 (11)
62-PMF/PMB-050-080	1.258 (32)	.786 (20)	0 (0)

Dimensions in inches (mm)

Common Mode

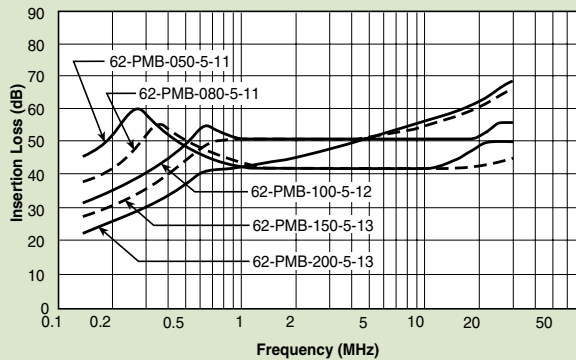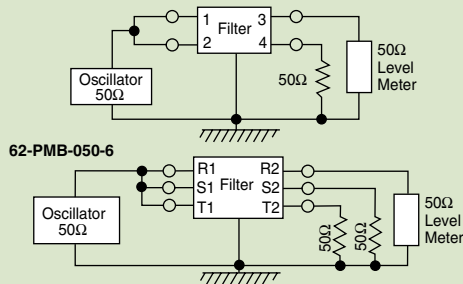

Normal Mode

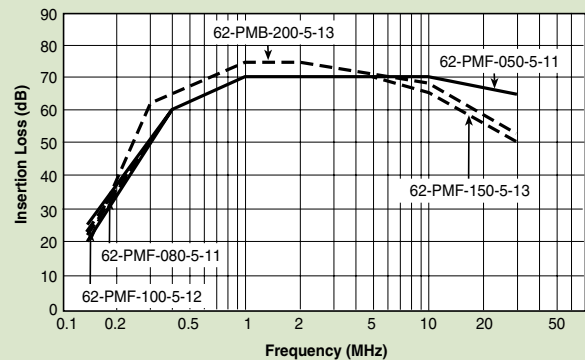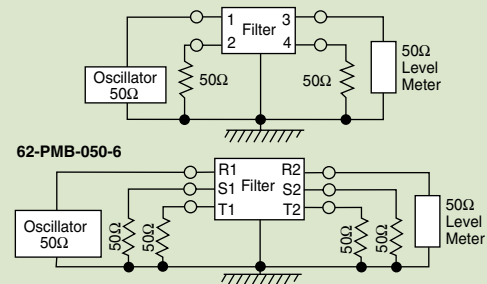

Power Line Filters Single Stage

12-PMF Series



Features

- Space-saving, compact designs
- Suitable for products that must conform to FCC regulations
- Excellent attenuation for high voltage impulse
- Metal case provides effective EMI shielding
- Excellent filtering characteristics for both normal mode and common mode
- Epoxy molded for internal component reliability
- Structure provides effective shielding for noise generated externally and internally
- Operating temperature: -25°C to +85°C


Applications

- Digital equipment
- Computers and peripherals
- Measuring instruments
- Medical equipment
- Equipment requiring very high impulse attenuation
- Factory automation equipment
- Industrial equipment such as UPS, inverters and converters
- Telecommunications equipment
- Office automation equipment, such as copy and fax machines




Circuit Diagram


Circuit 1




Circuit 2




Circuit 3




Circuit 4



Circuit 5



Circuit 6



Specifications

Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Circuit Diagram	Figure	Temperature Rise (Max.)
12-PMF-001-5-A	120/250VAC	1A	0.5mA	1	A	30°C
12-PMF-002-5-B		2A		2	B	
12-PMF-003-5-A		3A		4	A	
12-PMF-003-5-B				2	B	
12-PMF-006-5-A		6A		4	A	
12-PMF-006-5-C				1	C	
12-PMF-006-5-D		6		D		
12-PMF-010-5-A		10A		2	A	
12-PMF-010-5-C				3	C	
12-PMF-015-5-C		15A		5		
12-PMF-015-5-E					C	
12-PMF-020-5-C		D				
12-PMF-020-5-D		D				
12-PMF-020-5-E		E				

Note: Test voltage: 1500VAC one minute, line to ground
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max.
Discharge time: 0.4 sec. max.

Power Line Filters Single Stage

12-PMF Series

Figure A

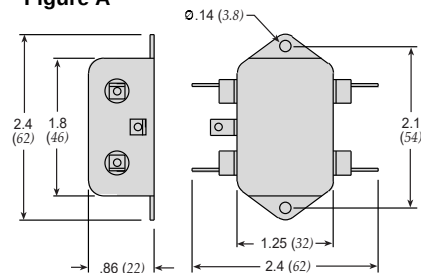


Figure B

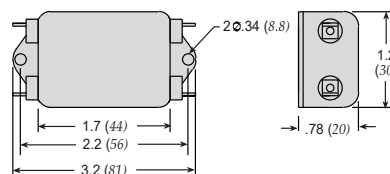


Figure C

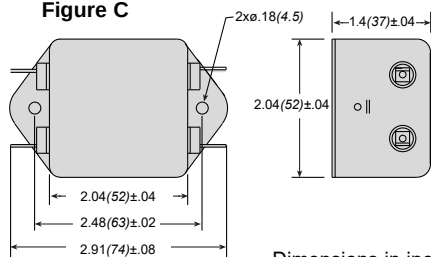


Figure D






Figure E

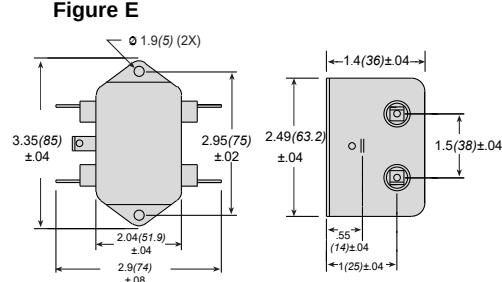


Dimensions in inches (mm)


Common Mode

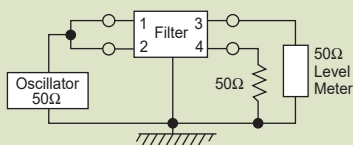


12-PMF-001;-002;-003;-006

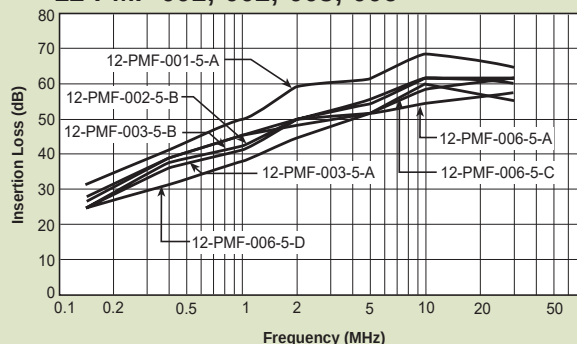


12-PMF-001;-002;-003;-006

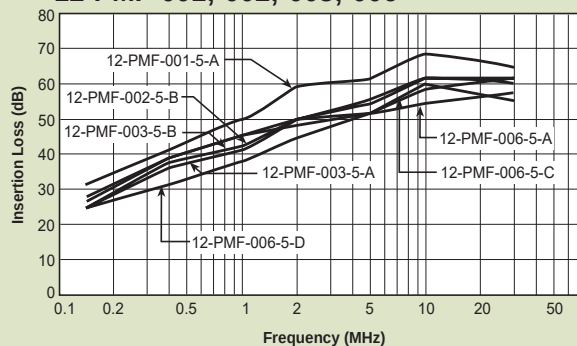


Normal Mode

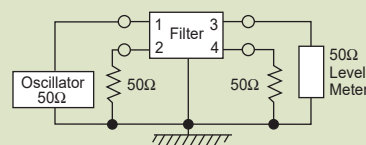

12-PMF-001;-002;-003;-006

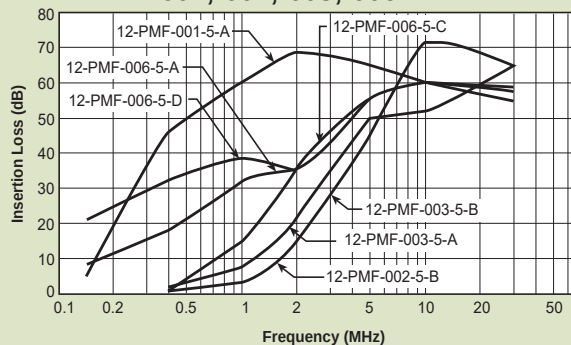

12-PMF-010;-015;-020

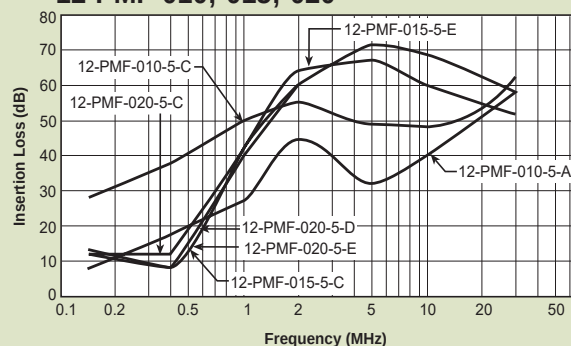

Power Line Filters Single Stage - Higher Current

62-PMB Series

Features


- Space-saving, compact designs
- Suitable for products that must conform to FCC regulations
- Excellent attenuation for high voltage impulse
- Metal case provides effective shielding
- Excellent filtering characteristics for both normal mode and common mode
- Epoxy molded for internal component reliability
- Structure provides effective shielding for noise generated externally and internally
- Safety agency approvals pending
- Designed to be in accordance with VDE 0565 Part 3
- Operating temperature: -25°C to +85°C (including temperature rise)

Applications

- Digital equipment
- Computers and peripherals
- Measuring instruments
- Medical equipment
- Equipment requiring very high impulse attenuation
- Factory automation equipment
- Industrial equipment such as UPS, inverters and converters
- Telecommunications equipment
- Office automation equipment, such as copy and fax machines



Circuit Diagram

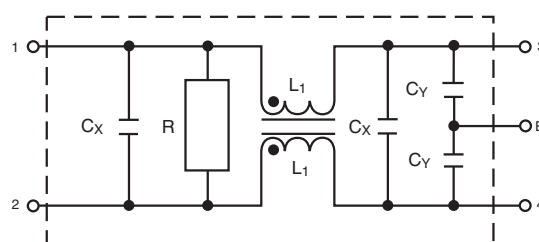

Specifications


Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance		Inductance (L ₁)	Temperature Rise (Max.)
				C _Y	C _X		
62-PMB-300-5-14	250VAC	30A	0.50mA	3300pF	.47uF	1.6mH	45°C
62-PMB-400-5-14		40A				0.8mH	

Note: Test voltage: 1500VAC one minute, line to earth
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max.
Discharge time: 0.4 sec. max.
Weight: 8.82 ounces (250 grams)

Power Line Filters Single Stage - Higher Current



62-PMB Series

62-PMB-300-5-14 and 62-PMB-400-5-14


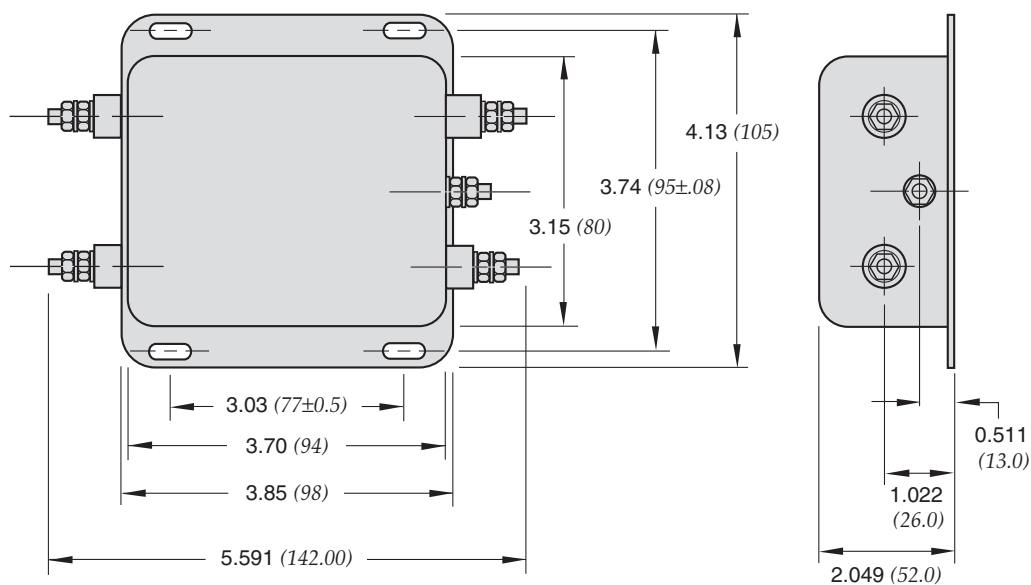


Dimensions in inches (mm)

Normal Mode

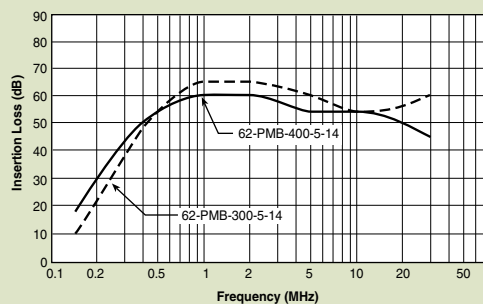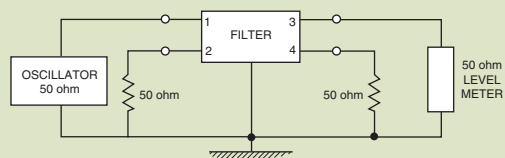

Common Mode

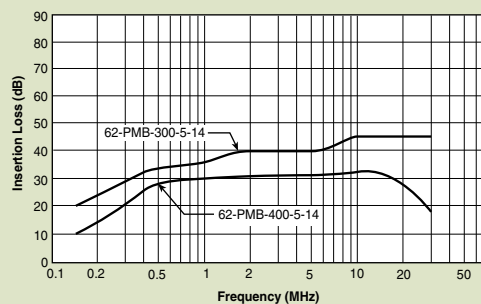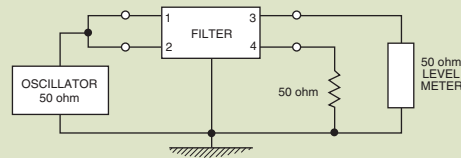

Power Line Filters Single Stage - Higher Current

12-PMB Series

Features


- Space-saving, compact designs
- Suitable for products that must conform to FCC regulations
- Excellent attenuation for high voltage impulse
- Metal case provides effective shielding
- Excellent filtering characteristics for both normal mode and common mode
- Epoxy molded for internal component reliability
- Structure provides effective shielding for noise generated externally and internally
- Designed to be in accordance with VDE 0565 Part 3
- Operating temperature: -25°C to +85°C

Applications

- Digital equipment
- Computers and peripherals
- Measuring instruments
- Medical equipment
- Equipment requiring very high impulse attenuation
- Factory automation equipment
- Industrial equipment such as UPS, inverters and converters
- Telecommunications equipment
- Office automation equipment, such as copy and fax machines



Circuit Diagram

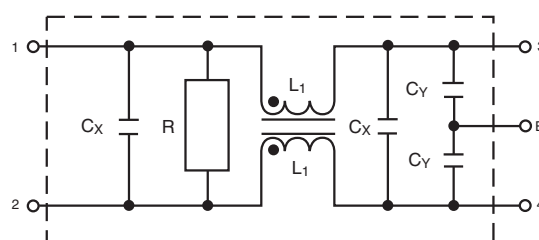

Specifications

Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Circuit Diagram	Figure	Temperature Rise (Max.)			
12-PMB-025-5-A	120/250VAC	25A	0.5mA	1	A	30°C			
12-PMB-030-5-A		30A			B				
12-PMB-035-5-B		35A							
12-PMB-050-5-B		50A			C				
12-PMB-100-8-C		100A	1.0mA						
12-PMB-120-8-C		120A							

Note: Test voltage: 1500VAC one minute, line to earth
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max.
Discharge time: 0.4 sec. max.
Weight: 8.82 ounces (250 grams)

Power Line Filters Single Stage - Higher Current

12-PMB Series

Figure A

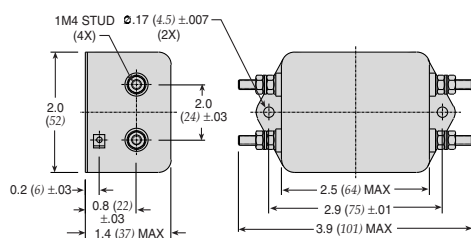


Figure B



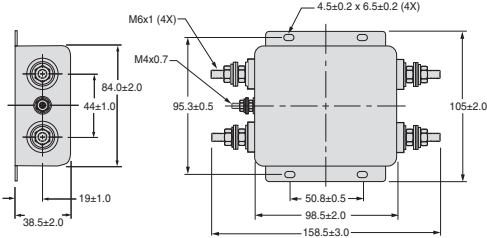


Figure C

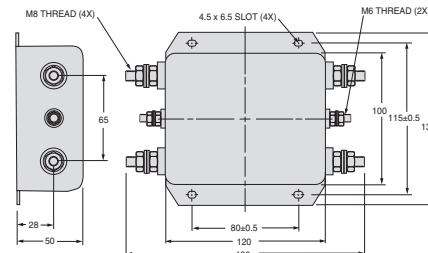


Dimensions in inches (mm)


Common Mode

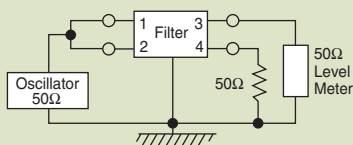


12-PMB-025;-030;-035

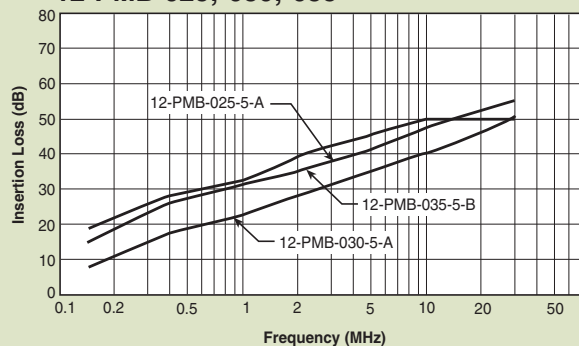


12-PMB-050;-100;-120

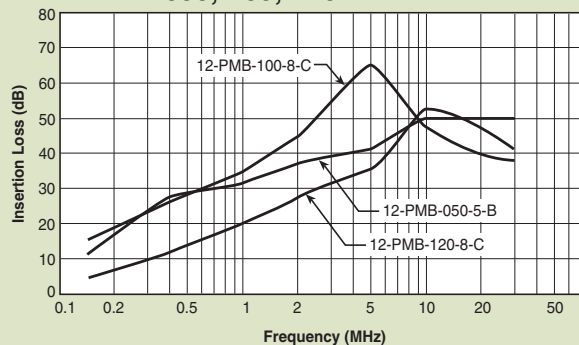


Normal Mode

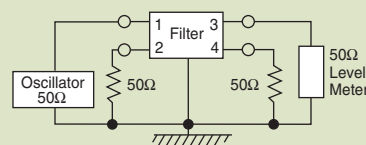

12-PMB-025;-030;-035

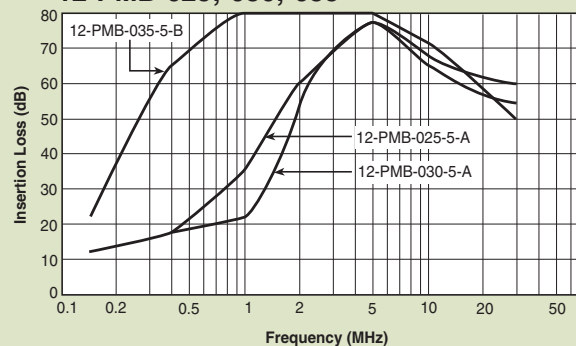

12-PMB-050;-100;-120

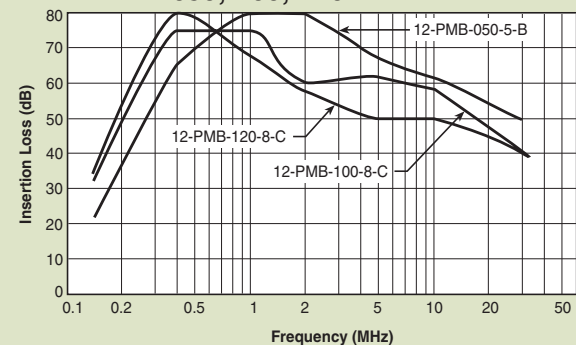

Power Line Filters DC - Higher Current

12-PMF & 12 PMB DC Series

Features


- Space-saving, compact designs
- Suitable for products that must conform to FCC regulations
- Excellent attenuation for high voltage impulse
- Metal case provides effective shielding
- Excellent filtering characteristics for both normal mode and common mode
- Epoxy molded for internal component reliability
- Structure provides effective shielding for noise generated externally and internally
- Designed to be in accordance with VDE 0565 Part 3
- Operating temperature: -40°C to +85°C

Applications

- Digital equipment
- Computers and peripherals
- Measuring instruments
- Equipment requiring very high impulse attenuation
- Factory automation equipment
- Industrial equipment such as UPS, inverters and converters
- Telecommunications equipment



Circuit Diagram

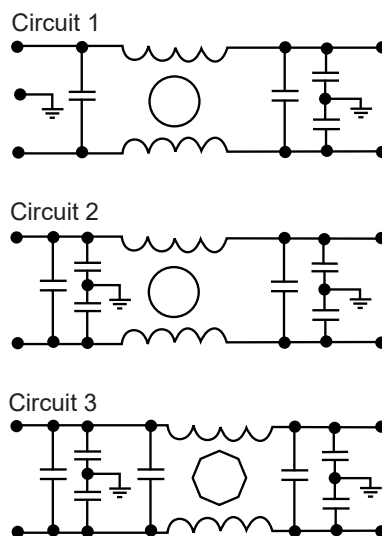

Specifications

Model	Rated Voltage	Rated Current	Circuit Diagram	Figure	Temperature Rise (Max.)
12-PMF-006-DC-C	48/250 VDC	6A	1	A	30°C
12-PMF-010-DC-C		10A			
12-PMF-015-DC-C		15A			
12-PMF-020-DC-C		20A			
12-PMF-025-DC-D		25A		B	
12-PMB-025-DC-F				C	
12-PMB-030-DC-F					
12-PMB-035-DC-F		35A			
12-PMB-040-DC-F		40A		D	
12-PMB-040-DC-B		50A			
12-PMB-050-DC-B		60A			
12-PMB-060-DC-B		80A	E		
12-PMB-080-DC-G					
12-PMB-080-DC-C		3	F		
12-PMB-100-DC-C				100A	
12-PMB-120-DC-C				120A	
12-PMB-140-DC-C		140A			
12-PMB-180-DC-E		2	G		
12-PMB-200-DC-E				180A	
12-PMB-260-DC-E				200A	
	260A				

Note: Test voltage: 1500VAC one minute, line to earth
Insulation resistance: 300 Mohm min. at 500VDC
Voltage drop: 1V max.

Discharge time: 0.4 sec. max.
Weight: 8.82 ounces (250 grams)

Power Line Filters DC - Higher Current

12-PMF & 12-PMB DC Series

Figure B

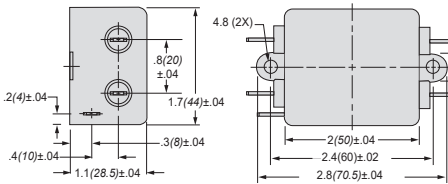


Figure C

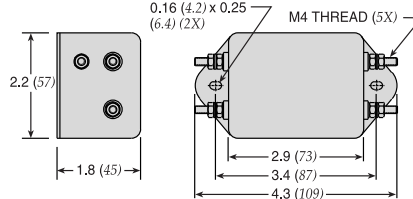


Figure A

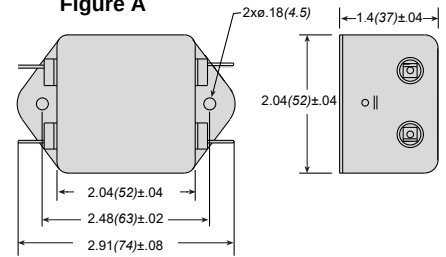


Figure D

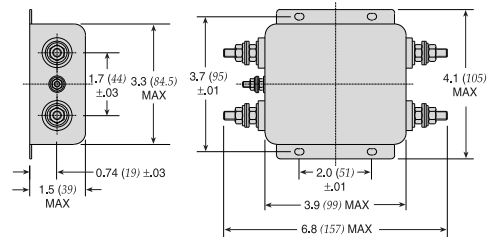


Figure E

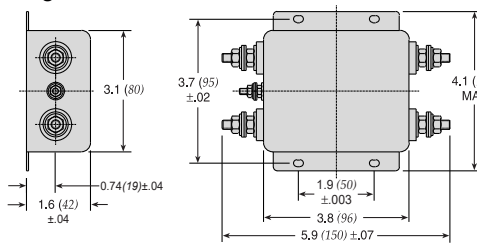


Figure F



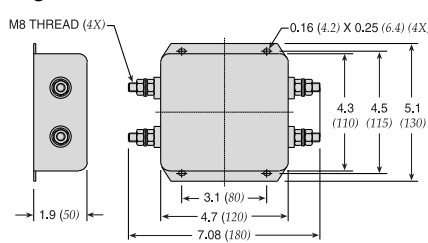


Figure G

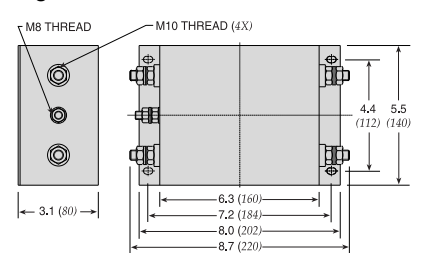


Dimensions in inches (mm)


Common Mode

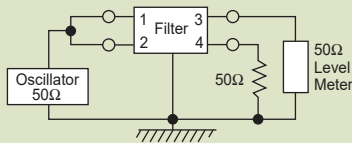


12-PMF-006;-010;-015;-020;-025

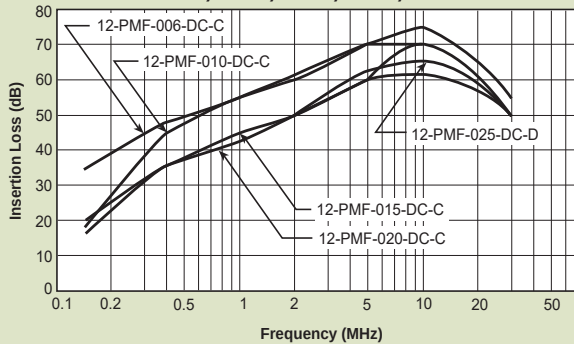


12-PMB-025; thru -260

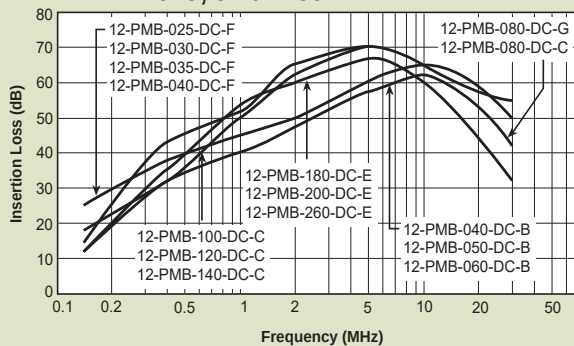


Normal Mode

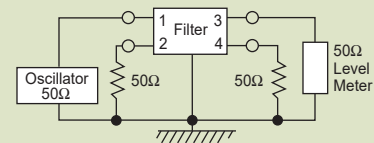

12-PMF-006;-010;-015;-020;-025

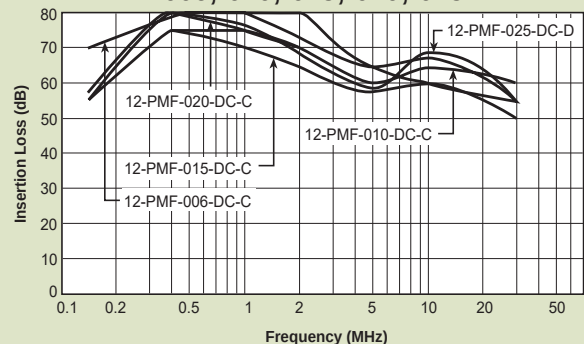

12-PMB-025; thru -260

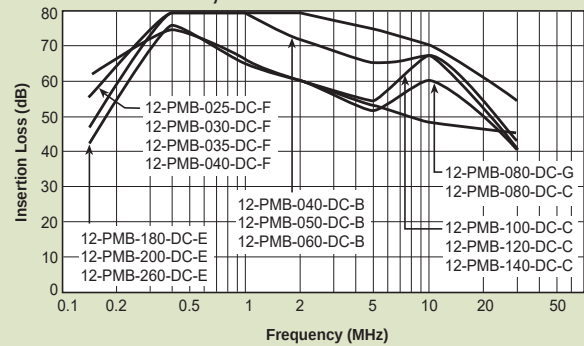

Power Line Filters Dual Stage

62-MMF Series

Features

- Suitable for products that must conform to FCC regulations
- Excellent attenuation for high voltage impulse
- Metal case provides effective EMI shielding
- Two stages for excellent filtering characteristics
- Epoxy molded for reliability
- Structure provides effective shielding for noise generated both externally and internally
- Operating temperature: -25°C to +85°C (including temperature rise, see graph on page PF73)


Applications

- Digital equipment
- Personal computers and peripherals
- Measuring instruments and medical equipment
- Telecommunications equipment
- Equipment requiring very high noise attenuation



Circuit Diagram

62-MMF-XXX-7-11

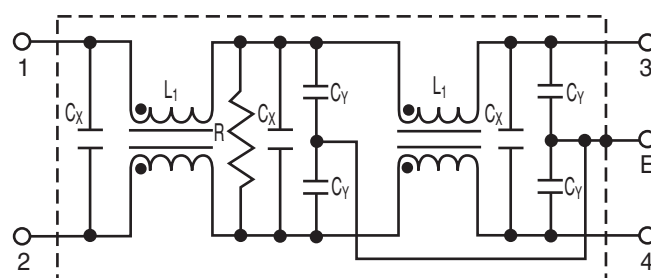

Specifications

Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Capacitance			Inductance (L ₁) (2X)	Temperature Rise (Max.)
				C _{Y1}	C _{Y2}	C _X		
62-MMF-030-7-11	250VAC	3A	.7mA	3300pF	1000pF	0.1uF	3.7mH	30°C
62-MMF-050-7-11	250VAC	5A	.7mA	3300pF	1000pF	0.1uF	2.9mH	30°C

Note: All types are designed to meet the requirement of UL 1283, CSA 22.2, VDE 0565-3

Test voltage: 1500VAC one minute, line to ground

Insulation resistance: 300 Mohm min. at 500VDC

Leakage current: 0.7 mA max.

Voltage drop: 1V max.



Discharge time: 0.4 sec. max.

Weight: 6.0 ounces (170 grams)


Power Line Filters Dual Stage

62-MMF Series


Temperature Characteristics

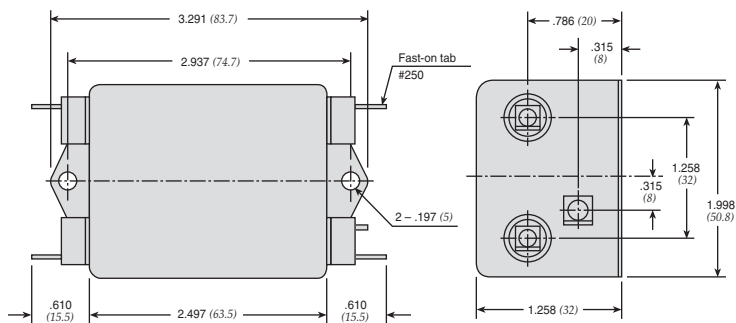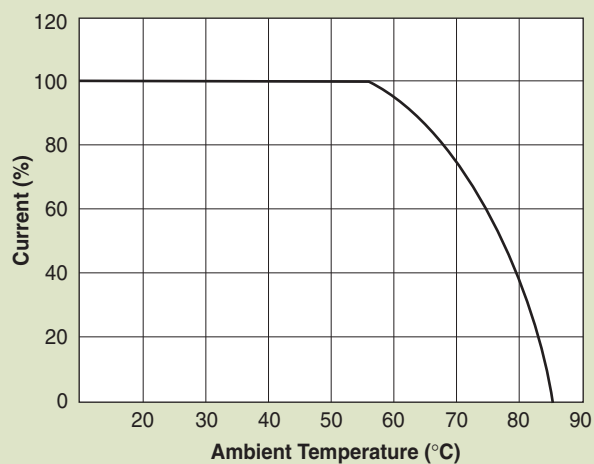


Common Mode

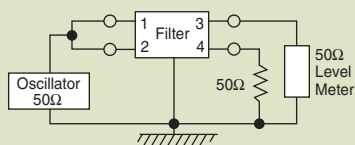


62-MMF

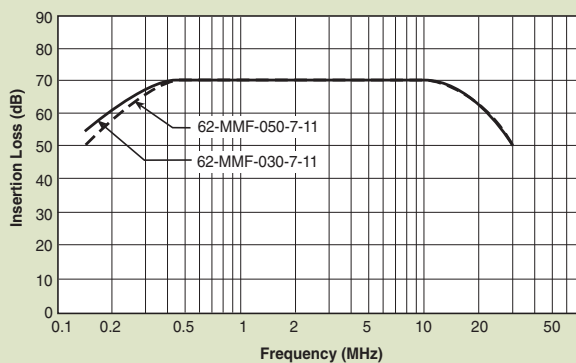

Normal Mode

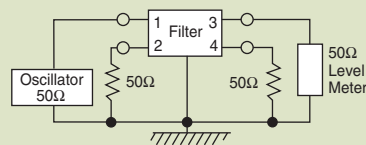

62-MMF

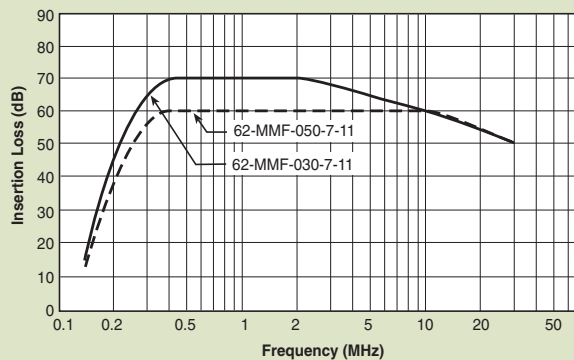

Power Line Filters Dual Stage

12-MMF & 12-MMB Series

Features

- Suitable for products that must conform to FCC regulations
- Excellent attenuation for high voltage impulse
- Metal case provides effective EMI shielding
- Two stages for excellent filtering characteristics
- Structure provides effective shielding for noise generated both externally and internally
- Operating temperature: -40°C to +85°C
- High performance
- Low leakage current


Applications

- Digital equipment
- Switching power supplies
- Personal computers and peripherals
- Measuring instruments and medical equipment
- Telecommunications equipment
- Equipment requiring very high noise attenuation




Circuit Diagram


Circuit 1

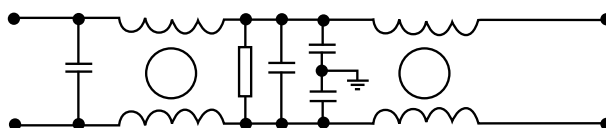

Circuit 2

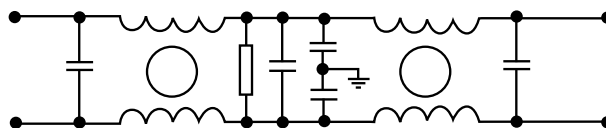

Circuit 3

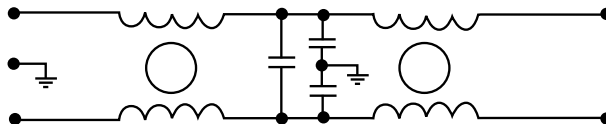

Specifications

Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Circuit Diagram	Figure	Temperature Rise (Max.)
12-MMF-002-5-F	120/250VAC	2A	0.25mA@120VAC/ 0.5mA@250VAC	1	A	30°C
12-MMF-003-5-F		3A			A	
12-MMF-003-5-A					B	
12-MMF-006-5-F		6A		2	A	
12-MMF-006-5-G					C	
12-MMF-008-5-B		8A			A	
12-MMF-010-5-F		10A			A1	
12-MMF-010-5-G					C	
12-MMF-010-5-B					D	
12-MMF-012-5-B		12A			G	
12-MMB-015-5-E		15A			E	
12-MMB-020-5-F		20A			F	
12-MMB-030-5-D		30A				
12-MMB-050-5-C		50A				

Note: All types are designed to meet the requirement of UL 1283, CSA 22.2, VDE 0565-3

Test voltage: 1500VAC one minute, line to ground

Insulation resistance: 300 Mohm min. at 500VDC

Voltage drop: 1V max.

Discharge time: 0.4 sec. max.

Power Line Filters Dual Stage

12-MMF & 12-MMB Series

Figure B




Figure C

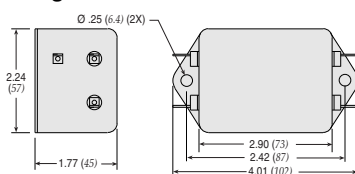


Figure A




Figure A1




Figure D

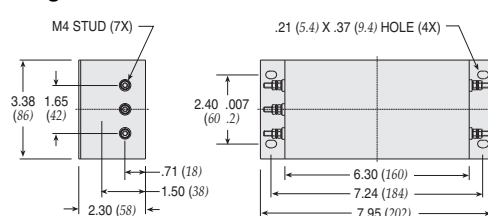


Figure E

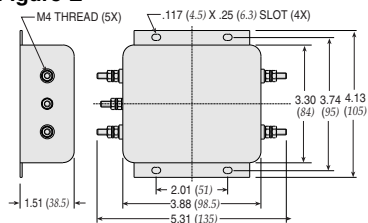


Figure F



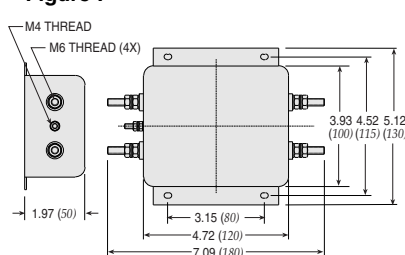


Figure G

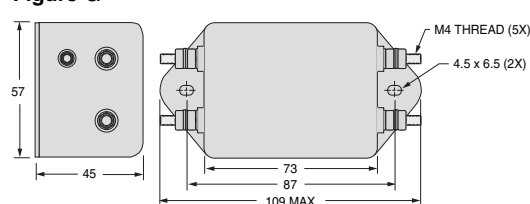


Dimensions in inches (mm)


Common Mode

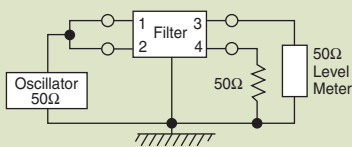


12-MMF-002;-003;-006;-008

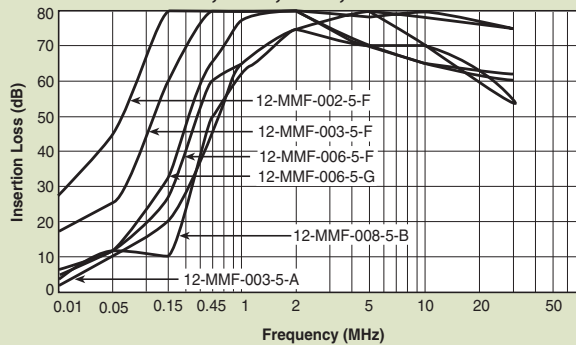


12-MMF-010;-012;-015;-020;-030;-050

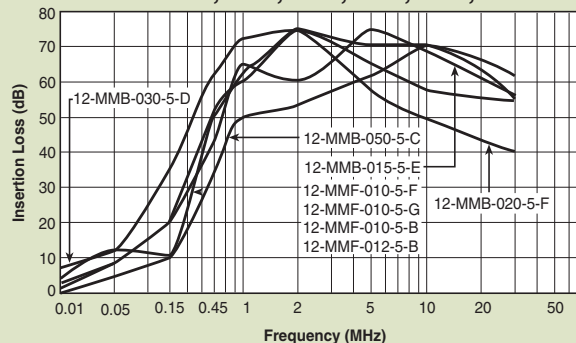


Normal Mode

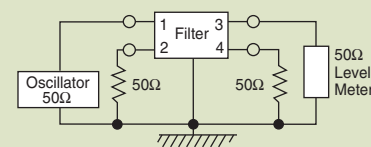

12-MMF-002;-003;-006;-008

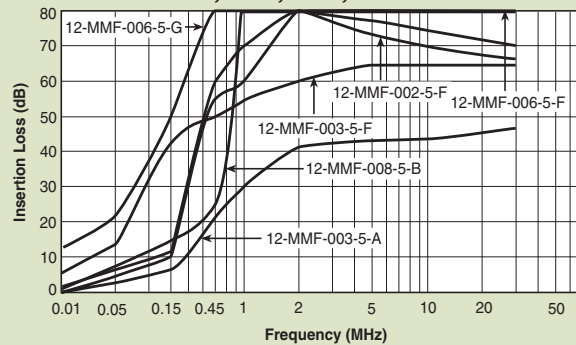

12-MMF-010;-012;-015;-020;-030;-050

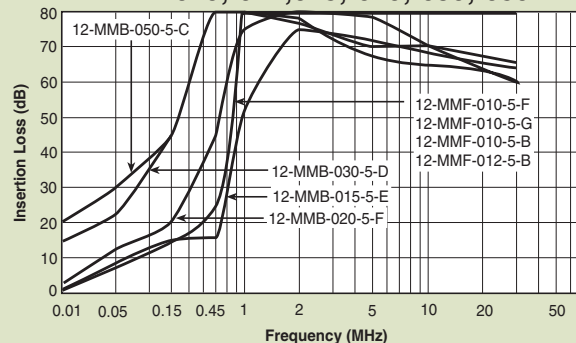

Power Line Filters Dual Stage

12-MMF & 12-MMB Series

Features

- Suitable for products that must conform to FCC regulations
- Excellent attenuation for high voltage impulse
- Metal case provides effective EMI shielding
- Two stages for excellent filtering characteristics
- Structure provides effective shielding for noise generated both externally and internally
- Operating temperature: -40°C to +85°C
- High performance


Applications

- Digital equipment
- Personal computers and peripherals
- Measuring instruments and medical equipment
- Telecommunications equipment
- Equipment requiring very high noise attenuation




Circuit Diagram

Circuit 1

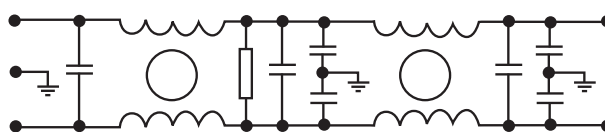

Circuit 2

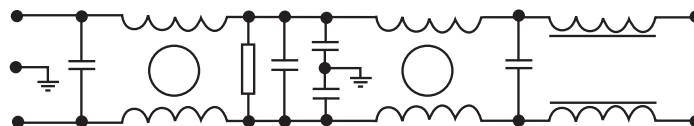

Specifications

Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Circuit Diagram	Figure	Temperature Rise (Max.)
12-MMF-003-11-F	120/250VAC	3A	1.5mA	1	A	30°C
12-MMF-006-11-F		6A				
12-MMF-010-11-F		10A			C	
12-MMB-015-11-G		15A		1	B	
12-MMB-020-11-D		20A				
12-MMB-030-11-D		30A			D	
12-MMB-040-11-B		40A		2	E	
12-MMB-040-11-E				1	F	
12-MMB-050-11-H		50A				

Note: All types are designed to meet the requirement of UL 1283, CSA 22.2. VDE 0565-3

Test voltage: 1500VAC one minute, line to ground

Insulation resistance: 300 Mohm min. at 500VDC

Leakage current: 0.7 mA max.

Voltage drop: 1V max.

Discharge time: 0.4 sec. max.

Weight: 6.0 ounces (170 grams)

Power Line Filters Dual Stage

12-MMF & 12-MMB Series

Figure A

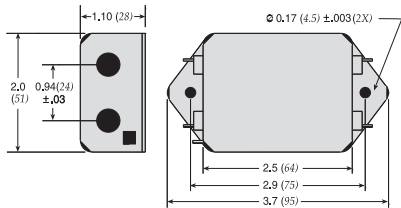


Figure B

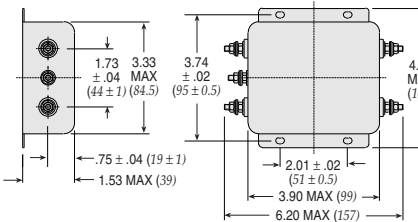


Figure C

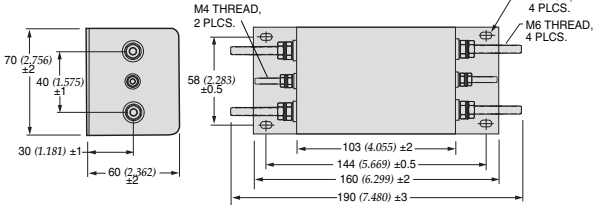


Figure D

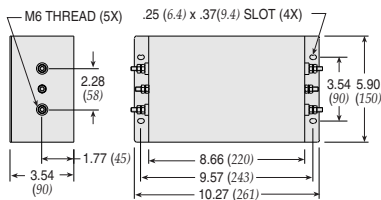


Figure E



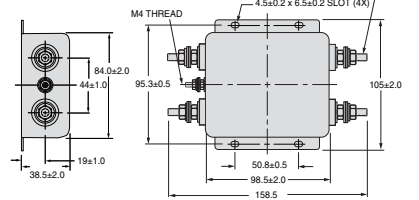


Figure F

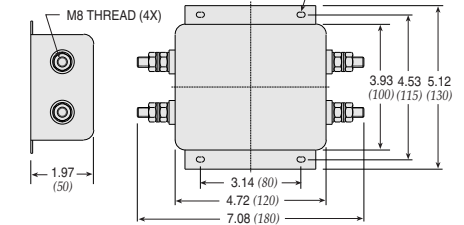


Dimensions in inches (mm)


Common Mode

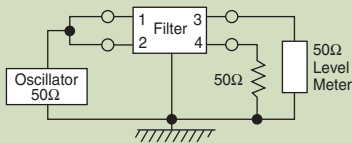


12-MMF/12-MMB-003;-006;-010;-012;-015

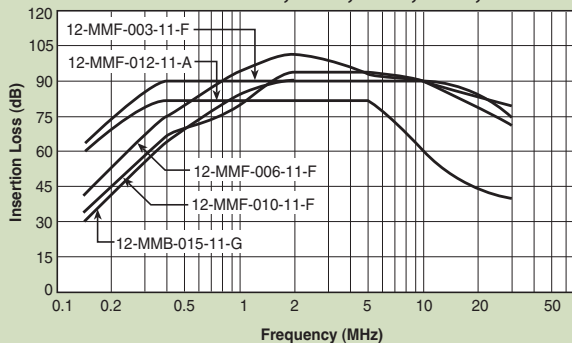


12-MMB-020;-030;-040;-050

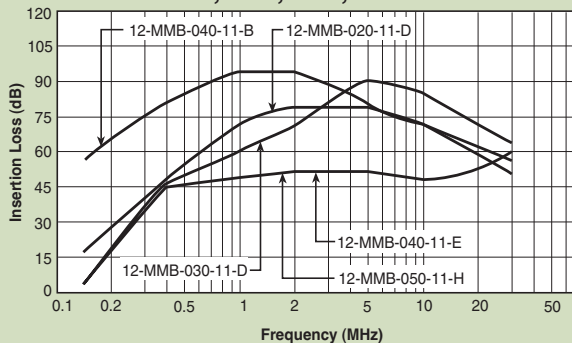


Normal Mode

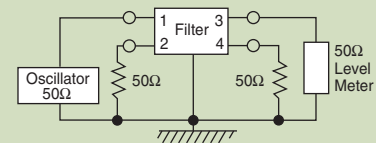

12-MMF/12-MMB-003;-006;-010;-012;-015

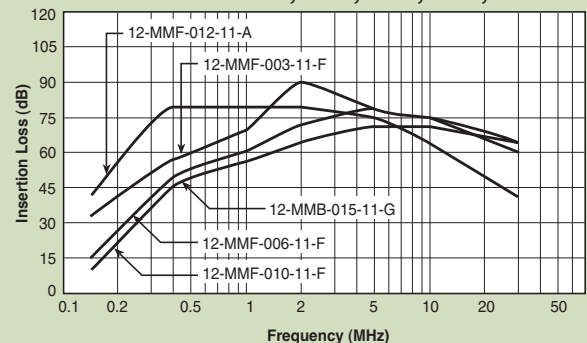

12-MMB-020;-030;-040;-050

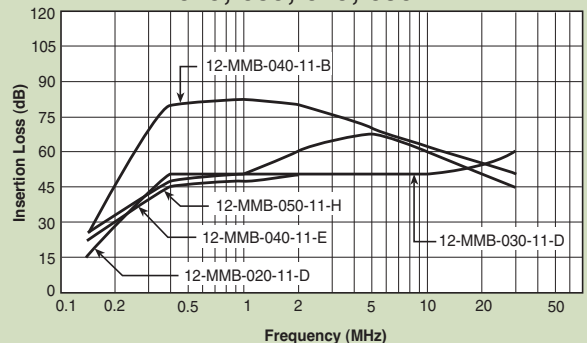

Power Line Filters Dual Stage

12-MMF & 12-MMB Series

Features

- Suitable for products that must conform to FCC regulations
- Excellent attenuation for high voltage impulse
- Metal case provides effective EMI shielding
- Two stages for excellent filtering characteristics
- Epoxy molded for reliability
- Structure provides effective shielding for noise generated both externally and internally
- Operating temperature: -25°C to +85°C


Applications

- Digital equipment
- Personal computers and peripherals
- Measuring instruments and medical equipment
- Telecommunications equipment
- Equipment requiring very high noise attenuation




Circuit Diagram


Circuit 1

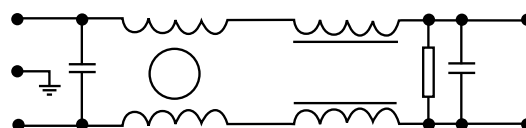

Circuit 2

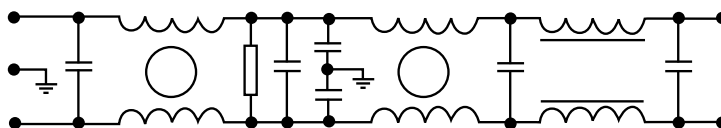

Circuit 3

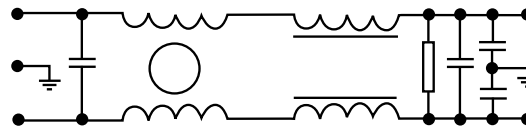

Specifications

Model	Rated Voltage (@ 50/60Hz)	Rated Current	Leakage Current (Max.)	Circuit Diagram	Figure	Temperature Rise (Max.)
12-MMF-001-5-F	120/250VAC	1A	0.5mA	3	A	30°C
12-MMF-003-5-G		3A			5uA	
12-MMF-003-2-G						
12-MMF-006-5-G		6A	0.5mA	2	C	
12-MMB-010-5-D		10A			D	
12-MMB-015-5-E		15A				
12-MMB-020-5-E		20A				
12-MMB-030-5-E		30A				

Note: All types are designed to meet the requirement of UL 1283, CSA 22.2. VDE 0565-3
 Test voltage: 1500VAC one minute, line to ground
 Insulation resistance: 300 Mohm min. at 500VDC
 Leakage current: 0.7 mA max.
 Voltage drop: 1V max.
 Discharge time: 0.4 sec. max.
 Weight: 6.0 ounces (170 grams)

Power Line Filters Dual Stage

12-MMF & 12-MMB Series

Figure A

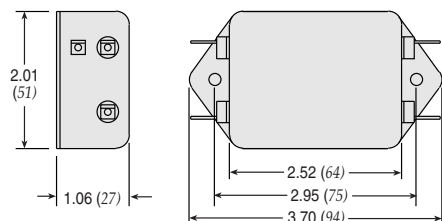


Figure B

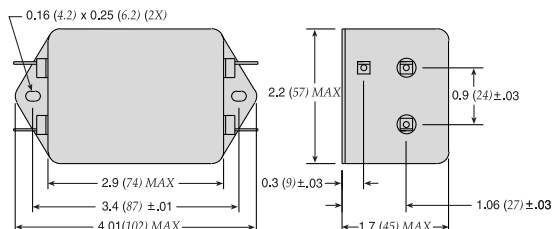


Figure C



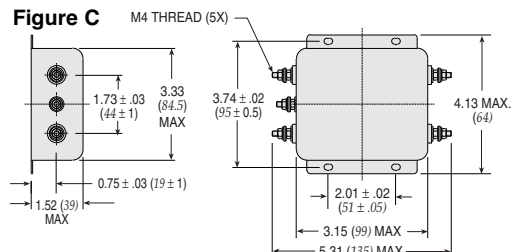


Figure D

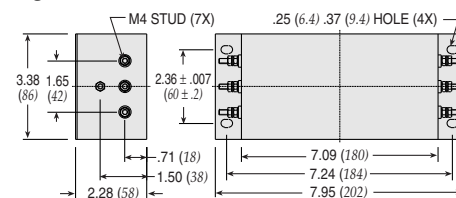


Dimensions in inches (mm)


Common Mode

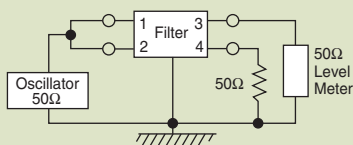


12-MMF-001;-003;-006

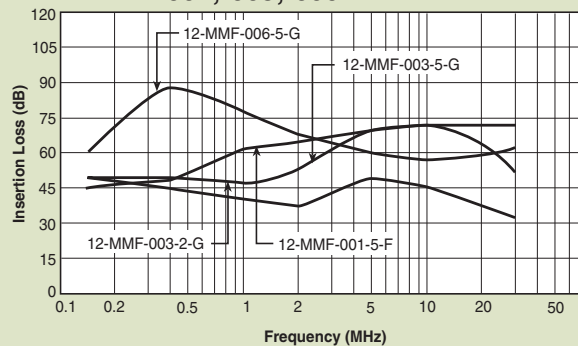


12-MMB-010;-015;-020;-030

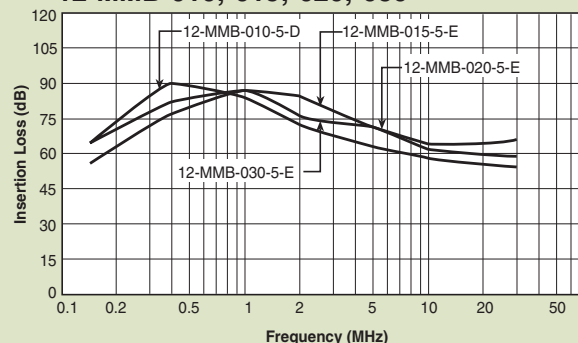


Normal Mode

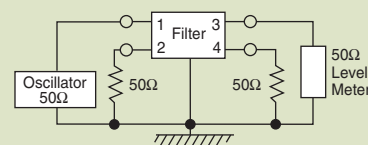

12-MMF-001;-003;-006

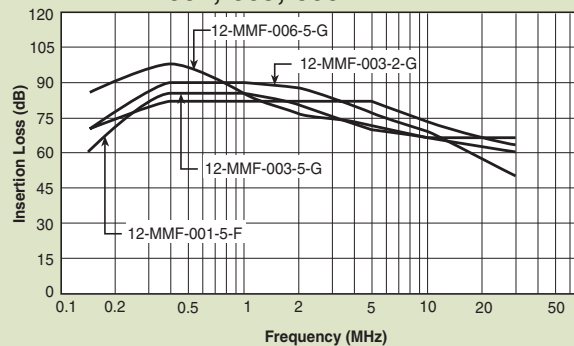

12-MMB-010;-015;-020;-030

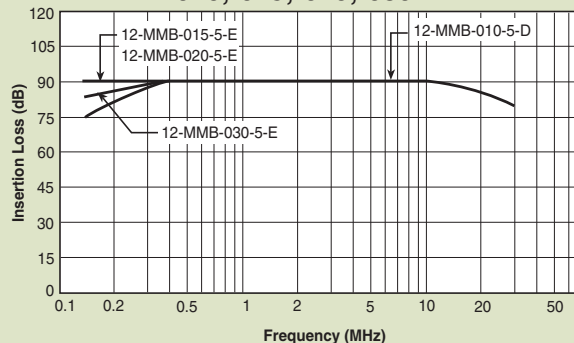

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

API Technologies:

[62-PML-015-3-11](#) [62-PMB-200-5-13](#) [62-LMF-100-5-11](#) [12-PMB-030-DC-F](#) [12-PMB-050-DC-B](#) [12-PMF-010-DC-C](#) [12-MMF-003-5-G](#) [12-MMB-080-12-A](#) [12-MMF-006-5-F](#) [12-MMF-010-11-F](#) [12-PMF-006-DC-C](#) [62-PMF-200-5-13](#) [12-PMF-006-5-A](#) [12-PMF-015-5-E](#) [62-PML-015-5-11](#) [62-ARL-030-3-11](#) [62-LMB-030-5-11](#) [62-LML-050-5-11](#) [12-PMF-020-5-C](#) [62-PML-030-3-11](#) [62-ARL-045-5-11](#) [62-AFL-045-5-11](#) [62-AFL-030-3-11](#) [62-PQF-060-5-11](#) [62-PQF-020-5-12](#) [62-PMF-100-5-12](#) [62-ARC-010-3-11](#) [62-AFC-016-5-11](#) [62-PRF-030-5-11](#) [62-LMB-100-5-11](#) [12-PMF-001-5-A](#) [62-AFC-010-3-11](#) [12-PMF-003-5-B](#) [62-PRF-010-5-12](#) [62-ARC-045-3-11](#) [62-ARL-060-5-11](#) [62-AFC-045-3-11](#) [62-PRF-010-5-11](#) [62-LMB-080-5-11](#) [62-LML-080-5-11](#) [62-AFC-016-3-11](#) [62-ARC-016-3-11](#) [62-ARC-016-5-11](#) [62-LMF-080-5-11](#) [62-PML-050-5-11](#) [62-ARC-030-5-11](#) [62-AFL-010-5-11](#) [62-AFC-030-5-11](#) [62-PML-050-3-11](#) [62-ARL-010-5-11](#) [62-PPF-060-5-11](#) [12-PMF-006-5-C](#) [12-PMF-010-5-C](#) [62-PPF-020-5-12](#) [62-MMF-030-7-11](#) [62-AFC-045-5-11](#) [62-ARC-060-3-11](#) [62-PPF-020-5-11](#) [62-ARC-045-5-11](#) [62-ARL-010-3-11](#) [62-PRF-030-5-12](#) [62-ARL-016-5-11](#) [62-MMF-050-7-11](#) [62-AFL-016-5-11](#) [12-PMF-010-5-A](#) [62-LMF-050-5-11](#) [62-AFL-060-5-11](#) [62-PPF-030-5-12](#) [62-PRF-020-5-12](#) [62-AFC-060-3-11](#) [63-PMF-080-8-14](#) [62-LML-100-5-11](#) [12-PMF-002-5-B](#) [62-AFL-010-3-11](#) [62-ARL-045-3-11](#) [62-PQF-020-5-11](#) [62-PQF-030-5-12](#) [12-PMF-003-5-A](#) [62-AFL-030-5-11](#) [62-LML-030-5-11](#) [62-AFL-016-3-11](#) [62-ARL-016-3-11](#) [12-PMF-006-5-D](#) [62-PMB-080-5-11](#) [62-PQF-030-5-11](#) [62-PMF-150-5-13](#) [62-ARC-010-5-11](#) [62-AFC-030-3-11](#) [62-ARC-030-3-11](#) [63-PMF-030-8-14](#) [62-LMF-030-5-11](#) [62-PML-030-5-11](#) [12-PMF-020-5-E](#) [62-AFL-045-3-11](#) [62-AFC-060-5-11](#) [62-AFC-010-5-11](#) [62-PRF-020-5-11](#) [62-ARL-060-3-11](#) [62-LMB-050-5-11](#) [62-AFL-060-3-11](#)