


Category 5 Right Angle Modular Jacks

NEW

Number of Circuits: 8.

863-0050. 44050-0001. Unshielded. 1-49.....	EACH	2.31	863-0053. 44150-0002. Snap fit pgs. 1-49.....	EACH	9.11
50-99.....	EACH	2.08	50-99.....	EACH	8.20
100-499.....	EACH	1.73	100-499.....	EACH	6.83
863-0051. 44050-0006. Shielded. 1-49.....	EACH	3.58	863-0054. 44150-0005. Snap fit pgs. 1-49.....	EACH	8.66
50-99.....	EACH	3.22	50-99.....	EACH	7.79
100-499.....	EACH	2.69	100-499.....	EACH	6.49
863-0052. 44150-0001. Snap fit pgs. 1-49.....	EACH	5.39	863-0055. 44150-0006. Snap fit pgs. 1-49.....	EACH	14.30
50-99.....	EACH	4.86	50-99.....	EACH	12.87
100-499.....	EACH	4.05	100-499.....	EACH	10.73

Solderless Terminals

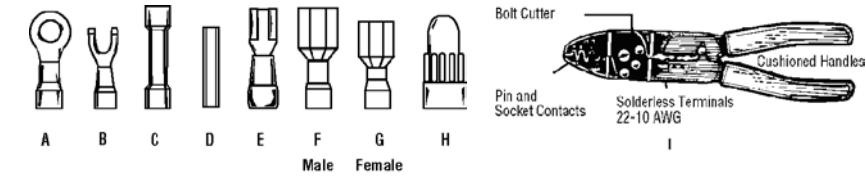

Ring Tongue Terminals — Fig. A

Vinyl Insulated			
863-1200. A-232-06X. #6 Stud. 22-18 AWG. 1-9.....	PER PK./100	7.03	
863-1201. A-221-08X. #8 Stud. 22-18 AWG. 1-9.....	PER PK./100	7.03	
863-1202. B-237-08X. #6 Stud. 16-14 AWG. 1-9.....	PER PK./100	7.03	
863-1203. B-237-08X. #8 Stud. 16-14 AWG. 1-9.....	PER PK./100	7.03	
863-1204. B-237-10X. #10 Stud. 16-14 AWG. 1-9.....	PER PK./100	7.03	
863-1205. C-228-08X. #8 Stud. 12-10 AWG. 1-9.....	PER PK./100	9.29	
863-1206. C-228-10X. #10 Stud. 12-10 AWG. 1-9.....	PER PK./100	9.29	
863-1207. C-230-14X. #1/4 Stud. 12-10 AWG. 1-9.....	PER PK./100	10.65	

Nylon Insulated			
863-1208. AA-832-06. #6 Stud. 22-18 AWG. 1-9.....	PER PK./100	10.88	
863-1209. AA-821-08. #8 Stud. 22-18 AWG. 1-9.....	PER PK./100	10.88	
863-1210. BB-837-06. #6 Stud. 16-14 AWG. 1-9.....	PER PK./100	10.88	
863-1211. BB-837-08. #8 Stud. 16-14 AWG. 1-9.....	PER PK./100	10.20	
863-1212. BB-837-10. #10 Stud. 16-14 AWG. 1-9.....	PER PK./100	10.88	
863-1214. C-828-10. #10 Stud. 12-10 AWG. 1-9.....	PER PK./100	14.28	

Fork Tongue Terminals — Fig. B

Vinyl Insulated			
863-1216. A-238-06X. #6 Stud. 22-18 AWG. 1-9.....	PER PK./100	7.03	
863-1217. A-234-08X. #8 Stud. 22-18 AWG. 1-9.....	PER PK./100	7.03	
863-1218. B-2781-08X. #6 Stud. 16-14 AWG. 1-9.....	PER PK./100	6.68	
863-1219. B-2781-08X. #8 Stud. 16-14 AWG. 1-9.....	PER PK./100	7.03	
863-1221. C-241-08X. #8 Stud. 12-10 AWG. 1-9.....	PER PK./100	7.48	
863-1222. C-241-10X. #10 Stud. 12-10 AWG. 1-9.....	PER PK./100	7.93	
863-1223. C-268-14X. #1/4 Stud. 12-10 AWG. 1-9.....	PER PK./100	10.20	

Fork Tongue Terminals — Fig. B (continued)

Nylon Insulated			
863-1224. AA-838-06. #6 Stud. 22-18 AWG. 1-9.....	PER PK./100	10.88	
863-1225. AA-834-08. #8 Stud. 22-18 AWG. 1-9.....	PER PK./100	10.88	
863-1227. C-841-08. #8 Stud. 12-10 AWG. 1-9.....	PER PK./100	13.37	
863-1228. C-841-10. #10 Stud. 12-10 AWG. 1-9.....	PER PK./100	14.05	

Butt Splices

Vinyl Insulated			
863-1229. A-245X. Fig. C. 22-18 AWG. 1-9.....	PER PK./100	6.12	
863-1230. B-231X. Fig. C. 16-14 AWG. 1-9.....	PER PK./100	6.12	
863-1231. C-246X. Fig. C. 12-10 AWG. 1-9.....	PER PK./100	8.61	

Nylon Insulated	
-----------------	--