




C TP-108

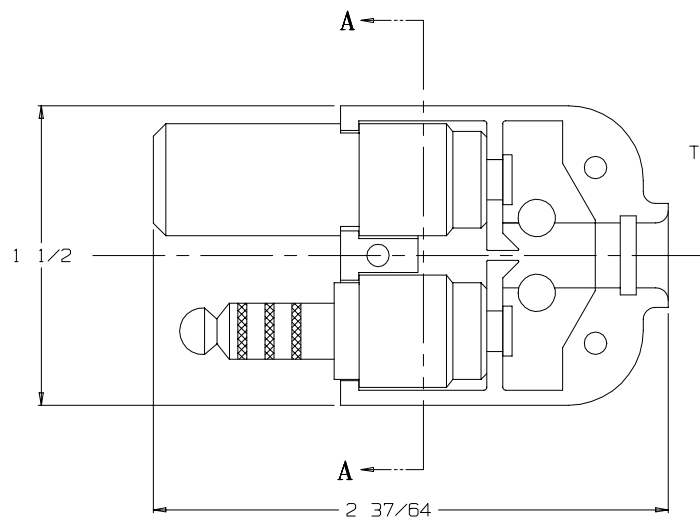


VIEW WITH HALF SHELL REMOVED

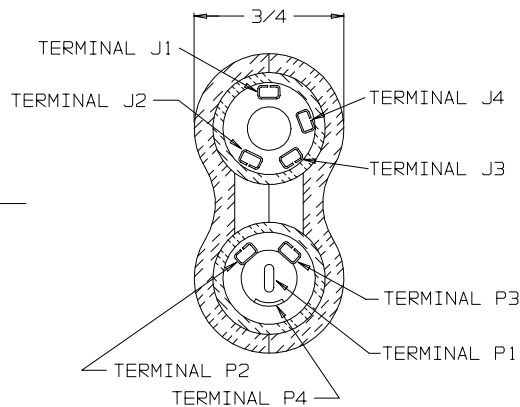


SECTION A-A

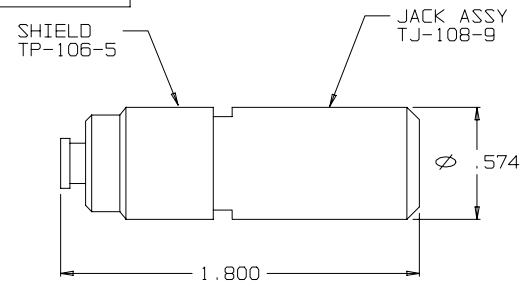



TJ-108-10 JACK & SHIELD ASSEMBLY

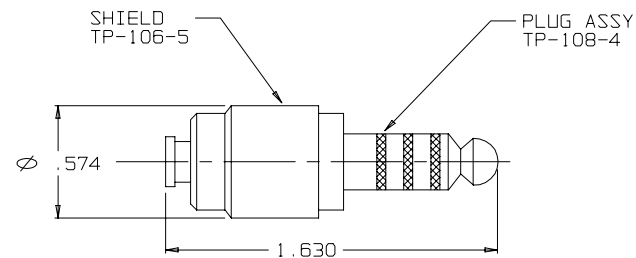


TP-108-6 PLUG & SHIELD ASSEMBLY

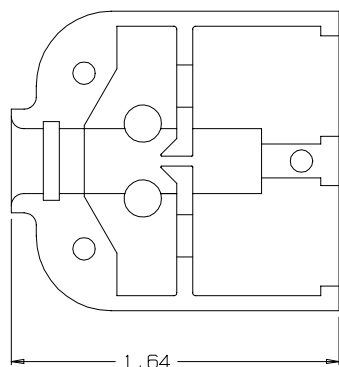


SHELL, HALF
TP-108-2
(2 REQ'D)

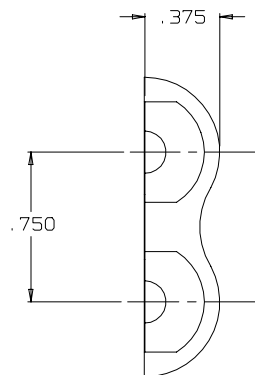

SCREW
TJ-106-12
(3 REQ'D)




WASHER
TJ-106-13
(3 REQ'D)




NUT
TJ-106-14
(3 REQ'D)

- F1** NOTES:
1) ALL NICKEL PLATING SHALL BE OF SUFFICIENT THICKNESS TO PROVIDE CORROSION PROTECTION.
(REF QQ-N-290-A, CLASS 1)
2) WIRING CALL OUTS ARE FOR REF ONLY




RING, STRAIN RELIEF
TJ-106-10A
(1 REQ'D)



SECTION B-B

STRAIN RELIEF
CLAMP TJ-106-10A
AFTER CRIMPING
SCALE: 4:1

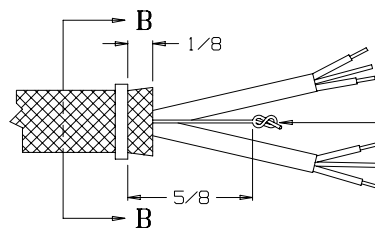

STAY CORD-VARNISH KNOT

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF NEXUS, INCORPORATED AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF NEXUS.

DWN. BY	IDH	DATE	MATERIAL	SEE FIELD OF DRAWING	
CHECKED BY	L SMITH	DATE 10/11/95	FINISH	N/A	
APPR. BY		DATE	WEIGHT	SCALE	2:1
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES			TITLE TP-108		
FRACTIONS DECIMALS ANGLES			PLUG-TELEPHONE-BIAXIAL SHIELDED (8) CONDUCTOR		
DO NOT SCALE DWG.	SHEET 1 OF 1		NEXUS STAMFORD, CONN.		
SIZE	DWG. NO.		C TP-108		

C	REDRAWN ON CAD	476	2/24/04	EWT
B	.305 WAS .400	283	12/4/97	
A	CORRECTED TO OF	197	10/11/95	LS
LET.	REVISION	CN #	DATE	CHK.