



## 3.3V CMOS ONE-TO-FOUR ADDRESS/CLOCK DRIVER WITH 3-STATE OUTPUTS AND 5 VOLT TOLERANT I/O

**IDT74LVC16344A**

### FEATURES:

- Typical  $t_{sk(o)}$  (Output Skew) < 250ps
- ESD > 2000V per MIL-STD-883, Method 3015; > 200V using machine model (C = 200pF, R = 0)
- $V_{CC} = 3.3V \pm 0.3V$ , Normal Range
- $V_{CC} = 2.7V$  to  $3.6V$ , Extended Range
- CMOS power levels ( $0.4\mu W$  typ. static)
- All inputs, outputs, and I/O are 5V tolerant
- Supports hot insertion
- Available in SSOP and TSSOP packages

### DRIVE FEATURES:

- High Output Drivers:  $\pm 24mA$
- Reduced system switching noise

### APPLICATIONS:

- 5V and 3.3V mixed voltage systems
- Data communication and telecommunication systems


### DESCRIPTION:

The LVC16344A is a 1:4 address/clock driver built using advanced dual metal CMOS technology. This high speed, low power device provides the ability to fanout to memory arrays. Eight banks, each with a fanout of 4, and 3-state control provide efficient address distribution. One or more banks may be used for clock distribution.

All pins of this address line driver can be driven from either 3.3V or 5V devices. This feature allows the use of this device as a translator in a mixed 3.3V/5V supply system.

The LVC16344A has been designed with a  $\pm 24mA$  output driver. This driver is capable of driving a moderate to heavy load while maintaining speed performance.

### FUNCTIONAL BLOCK DIAGRAM

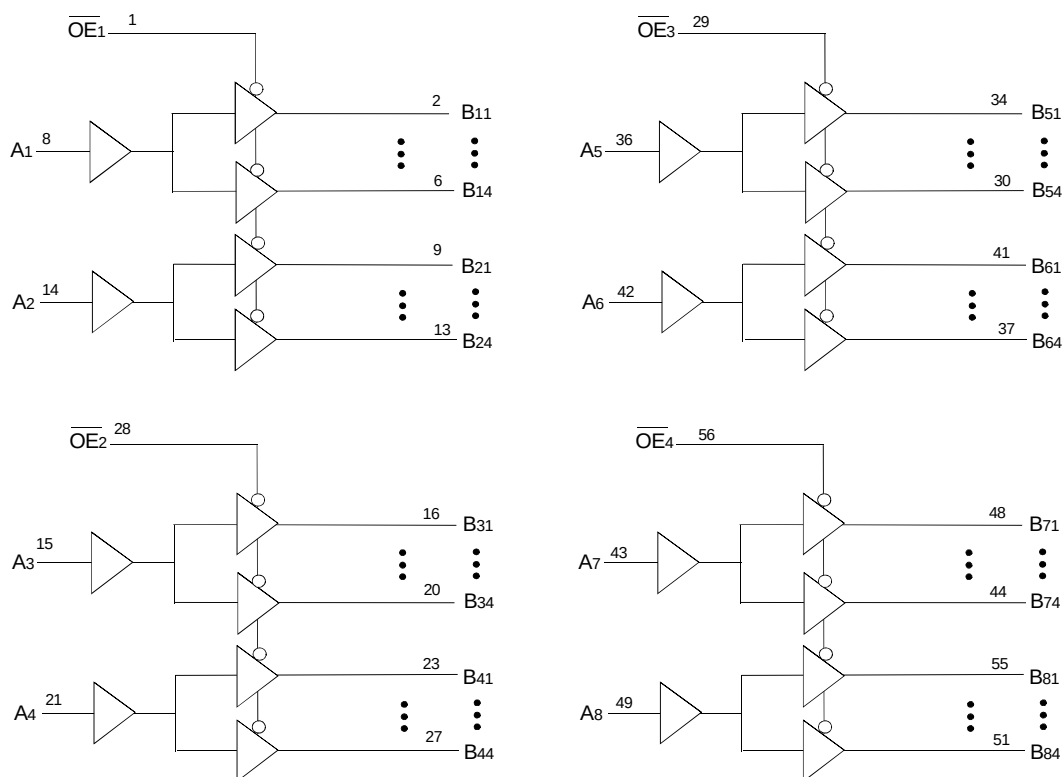


The IDT logo is a registered trademark of Integrated Device Technology, Inc.

INDUSTRIAL TEMPERATURE RANGE

JANUARY 2004

## PIN CONFIGURATION

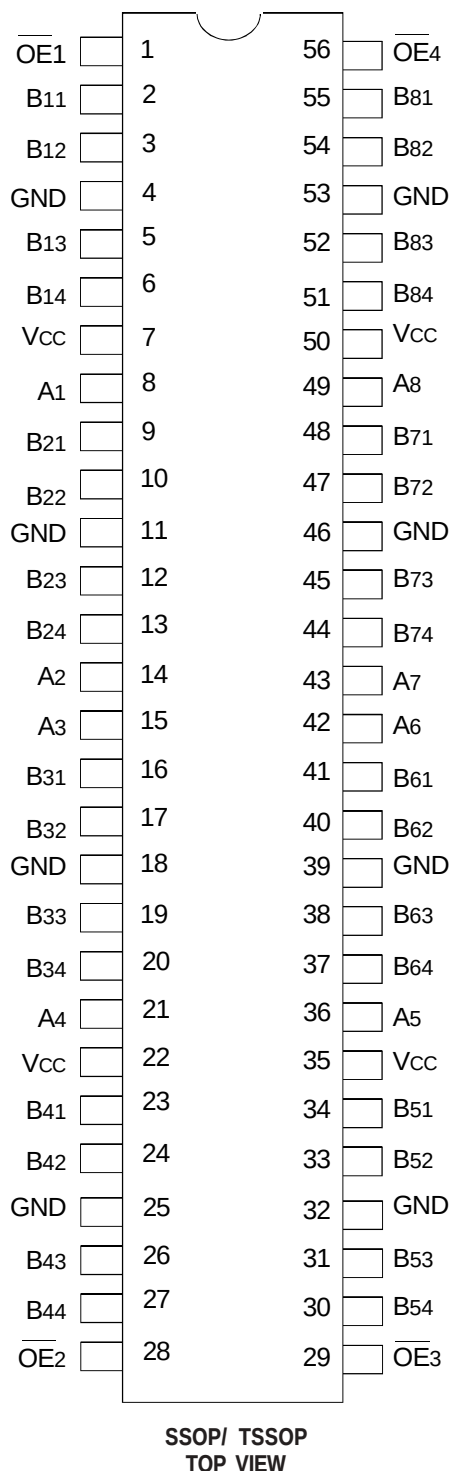

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

| Symbol                             | Description                                                           | Max          | Unit |
|------------------------------------|-----------------------------------------------------------------------|--------------|------|
| V <sub>TERM</sub>                  | Terminal Voltage with Respect to GND                                  | −0.5 to +6.5 | V    |
| T <sub>STG</sub>                   | Storage Temperature                                                   | −65 to +150  | °C   |
| I <sub>OUT</sub>                   | DC Output Current                                                     | −50 to +50   | mA   |
| I <sub>IK</sub><br>I <sub>OK</sub> | Continuous Clamp Current,<br>V <sub>I</sub> < 0 or V <sub>O</sub> < 0 | −50          | mA   |
| I <sub>CC</sub><br>I <sub>SS</sub> | Continuous Current through each<br>V <sub>CC</sub> or GND             | ±100         | mA   |

### NOTE:

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

## CAPACITANCE (T<sub>A</sub> = +25°C, F = 1.0MHz)

| Symbol           | Parameter <sup>(1)</sup> | Conditions            | Typ. | Max. | Unit |
|------------------|--------------------------|-----------------------|------|------|------|
| C <sub>IN</sub>  | Input Capacitance        | V <sub>IN</sub> = 0V  | 4.5  | 6    | pF   |
| C <sub>OUT</sub> | Output Capacitance       | V <sub>OUT</sub> = 0V | 6.5  | 8    | pF   |
| C <sub>I/O</sub> | I/O Port Capacitance     | V <sub>IN</sub> = 0V  | 6.5  | 8    | pF   |

### NOTE:

- As applicable to the device type.

## PIN DESCRIPTION

| Pin Names        | Description                               |
|------------------|-------------------------------------------|
| $\overline{OE}x$ | 3-State Output Enable Inputs (Active LOW) |
| Ax               | Data Inputs                               |
| Bxx              | 3-State Outputs                           |

## FUNCTION TABLE<sup>(1)</sup>

| Inputs           |    | Outputs |
|------------------|----|---------|
| $\overline{OE}x$ | Ax | Bxx     |
| L                | L  | L       |
| L                | H  | H       |
| H                | X  | Z       |

### NOTES:

- H = HIGH Voltage Level  
X = Don't Care  
L = LOW Voltage Level  
Z = High-Impedance

## DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:

Operating Condition:  $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

| Symbol                              | Parameter                                              | Test Conditions                                                       |                                          | Min. | Typ. <sup>(1)</sup> | Max.     | Unit          |
|-------------------------------------|--------------------------------------------------------|-----------------------------------------------------------------------|------------------------------------------|------|---------------------|----------|---------------|
| $V_{IH}$                            | Input HIGH Voltage Level                               | $V_{CC} = 2.3\text{V}$ to $2.7\text{V}$                               |                                          | 1.7  | —                   | —        | V             |
|                                     |                                                        | $V_{CC} = 2.7\text{V}$ to $3.6\text{V}$                               |                                          | 2    | —                   | —        |               |
| $V_{IL}$                            | Input LOW Voltage Level                                | $V_{CC} = 2.3\text{V}$ to $2.7\text{V}$                               |                                          | —    | —                   | 0.7      | V             |
|                                     |                                                        | $V_{CC} = 2.7\text{V}$ to $3.6\text{V}$                               |                                          | —    | —                   | 0.8      |               |
| $I_{IH}$<br>$I_{IL}$                | Input Leakage Current                                  | $V_{CC} = 3.6\text{V}$                                                | $V_I = 0$ to $5.5\text{V}$               | —    | —                   | $\pm 5$  | $\mu\text{A}$ |
| $I_{OZH}$<br>$I_{OZL}$              | High Impedance Output Current<br>(3-State Output pins) | $V_{CC} = 3.6\text{V}$                                                | $V_O = 0$ to $5.5\text{V}$               | —    | —                   | $\pm 10$ | $\mu\text{A}$ |
| $I_{OFF}$                           | Input/Output Power Off Leakage                         | $V_{CC} = 0\text{V}$ , $V_{IN}$ or $V_O \leq 5.5\text{V}$             |                                          | —    | —                   | $\pm 50$ | $\mu\text{A}$ |
| $V_{IK}$                            | Clamp Diode Voltage                                    | $V_{CC} = 2.3\text{V}$ , $I_{IN} = -18\text{mA}$                      |                                          | —    | -0.7                | -1.2     | V             |
| $V_H$                               | Input Hysteresis                                       | $V_{CC} = 3.3\text{V}$                                                |                                          | —    | 100                 | —        | mV            |
| $I_{CCL}$<br>$I_{CCH}$<br>$I_{CCZ}$ | Quiescent Power Supply Current                         | $V_{CC} = 3.6\text{V}$                                                | $V_{IN} = \text{GND}$ or $V_{CC}$        | —    | —                   | 10       | $\mu\text{A}$ |
|                                     |                                                        |                                                                       | $3.6 \leq V_{IN} \leq 5.5\text{V}^{(2)}$ | —    | —                   | 10       |               |
| $\Delta I_{CC}$                     | Quiescent Power Supply Current Variation               | One input at $V_{CC} - 0.6\text{V}$ , other inputs at $V_{CC}$ or GND |                                          | —    | —                   | 500      | $\mu\text{A}$ |

### NOTES:

- Typical values are at  $V_{CC} = 3.3\text{V}$ ,  $+25^{\circ}\text{C}$  ambient.
- This applies in the disabled state only.

## OUTPUT DRIVE CHARACTERISTICS

| Symbol   | Parameter           | Test Conditions <sup>(1)</sup>          |                          | Min.           | Max. | Unit |
|----------|---------------------|-----------------------------------------|--------------------------|----------------|------|------|
| $V_{OH}$ | Output HIGH Voltage | $V_{CC} = 2.3\text{V}$ to $3.6\text{V}$ | $I_{OH} = -0.1\text{mA}$ | $V_{CC} - 0.2$ | —    | V    |
|          |                     | $V_{CC} = 2.3\text{V}$                  | $I_{OH} = -6\text{mA}$   | 2              | —    |      |
|          |                     | $V_{CC} = 2.3\text{V}$                  | $I_{OH} = -12\text{mA}$  | 1.7            | —    |      |
|          |                     | $V_{CC} = 2.7\text{V}$                  |                          | 2.2            | —    |      |
|          |                     | $V_{CC} = 3\text{V}$                    |                          | 2.4            | —    |      |
|          |                     | $V_{CC} = 3\text{V}$                    | $I_{OH} = -24\text{mA}$  | 2.2            | —    |      |
| $V_{OL}$ | Output LOW Voltage  | $V_{CC} = 2.3\text{V}$ to $3.6\text{V}$ | $I_{OL} = 0.1\text{mA}$  | —              | 0.2  | V    |
|          |                     | $V_{CC} = 2.3\text{V}$                  | $I_{OL} = 6\text{mA}$    | —              | 0.4  |      |
|          |                     |                                         | $I_{OL} = 12\text{mA}$   | —              | 0.7  |      |
|          |                     | $V_{CC} = 2.7\text{V}$                  | $I_{OL} = 12\text{mA}$   | —              | 0.4  |      |
|          |                     | $V_{CC} = 3\text{V}$                    | $I_{OL} = 24\text{mA}$   | —              | 0.55 |      |

### NOTE:

- $V_{IH}$  and  $V_{IL}$  must be within the min. or max. range shown in the DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE table for the appropriate  $V_{CC}$  range.  
 $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

## OPERATING CHARACTERISTICS, $V_{CC} = 3.3V \pm 0.3V$ , $T_A = 25^\circ C$

| Symbol | Parameter                                                        | Test Conditions           | Typical | Unit |
|--------|------------------------------------------------------------------|---------------------------|---------|------|
| CPD    | Power Dissipation Capacitance per Buffer/Driver Outputs enabled  | $C_L = 0pF$ , $f = 10MHz$ |         | pF   |
| CPD    | Power Dissipation Capacitance per Buffer/Driver Outputs disabled |                           |         |      |

## SWITCHING CHARACTERISTICS<sup>(1)</sup>

| Symbol                 | Parameter                                                                                          | $V_{CC} = 2.7V$ |      | $V_{CC} = 3.3V \pm 0.3V$ |      | Unit |
|------------------------|----------------------------------------------------------------------------------------------------|-----------------|------|--------------------------|------|------|
|                        |                                                                                                    | Min.            | Max. | Min.                     | Max. |      |
| $t_{PLH}$<br>$t_{PHL}$ | Propagation Delay<br>Ax to Bxx                                                                     |                 |      | 1.5                      | 4.4  | ns   |
| $t_{PZH}$<br>$t_{PZL}$ | Output Enable Time<br>$\overline{OE}x$ to Bxx                                                      |                 |      | 1.5                      | 5.8  | ns   |
| $t_{PHZ}$<br>$t_{PLZ}$ | Output Disable Time<br>$\overline{OE}x$ to Bxx                                                     |                 |      | 1.5                      | 5.2  | ns   |
| $t_{sk}(b)$            | Skew between outputs of same bank and same package<br>(same transition)                            |                 |      | —                        | 350  | ps   |
| $t_{sk}(o)$            | Skew between outputs of all banks and same package<br>(A1 through A8 tied together) <sup>(2)</sup> |                 |      | —                        | 500  | ps   |


### NOTES:

1. See TEST CIRCUITS AND WAVEFORMS.  $T_A = -40^\circ C$  to  $+85^\circ C$ .
2. Skew between any two outputs of the same package and switching in the same direction.

## TEST CIRCUITS AND WAVEFORMS

### TEST CONDITIONS

| Symbol            | V <sub>CC</sub> <sup>(1)</sup> =3.3V±0.3V | V <sub>CC</sub> <sup>(1)</sup> =2.7V | V <sub>CC</sub> <sup>(2)</sup> =2.5V±0.2V | Unit |
|-------------------|-------------------------------------------|--------------------------------------|-------------------------------------------|------|
| V <sub>LOAD</sub> | 6                                         | 6                                    | 2 x V <sub>CC</sub>                       | V    |
| V <sub>IH</sub>   | 2.7                                       | 2.7                                  | V <sub>CC</sub>                           | V    |
| V <sub>T</sub>    | 1.5                                       | 1.5                                  | V <sub>CC</sub> / 2                       | V    |
| V <sub>LZ</sub>   | 300                                       | 300                                  | 150                                       | mV   |
| V <sub>HZ</sub>   | 300                                       | 300                                  | 150                                       | mV   |
| C <sub>L</sub>    | 50                                        | 50                                   | 30                                        | pF   |

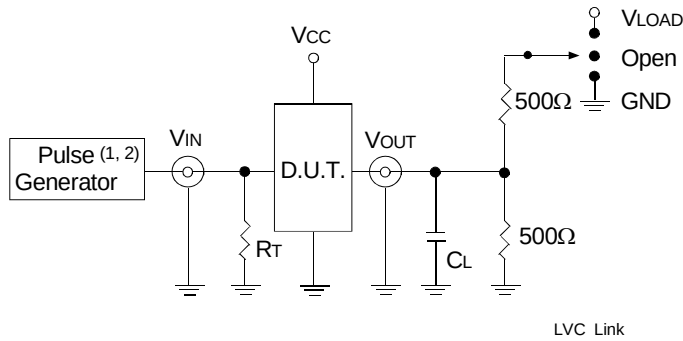

Test Circuit for All Outputs

#### DEFINITIONS:

C<sub>L</sub> = Load capacitance: includes jig and probe capacitance.


R<sub>T</sub> = Termination resistance: should be equal to Z<sub>OUT</sub> of the Pulse Generator.

#### NOTES:

1. Pulse Generator for All Pulses: Rate ≤ 10MHz; t<sub>r</sub> ≤ 2.5ns; t<sub>f</sub> ≤ 2.5ns.
2. Pulse Generator for All Pulses: Rate ≤ 10MHz; t<sub>r</sub> ≤ 2ns; t<sub>f</sub> ≤ 2ns.

### SWITCH POSITION


| Test                                    | Switch            |
|-----------------------------------------|-------------------|
| Open Drain<br>Disable Low<br>Enable Low | V <sub>LOAD</sub> |
| Disable High<br>Enable High             | GND               |
| All Other Tests                         | Open              |

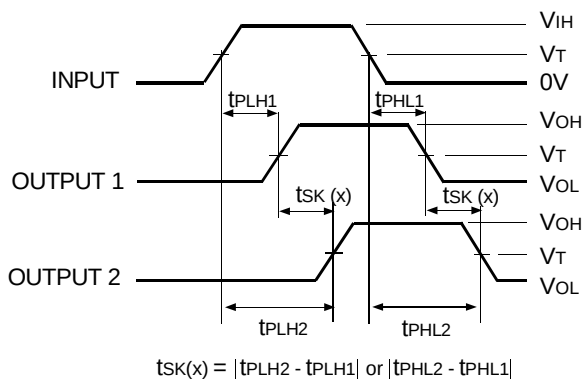


Output Skew - tsK(x)

#### NOTES:

1. For tsK(o) OUTPUT1 and OUTPUT2 are any two outputs.
2. For tsK(b) OUTPUT1 and OUTPUT2 are in the same bank.

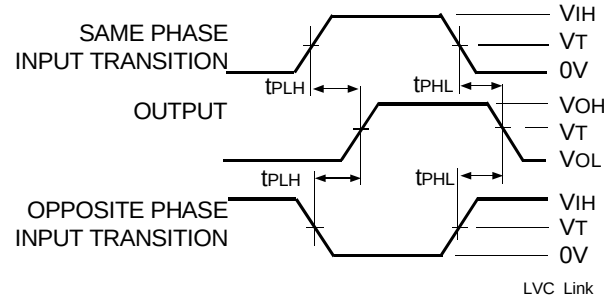


Propagation Delay

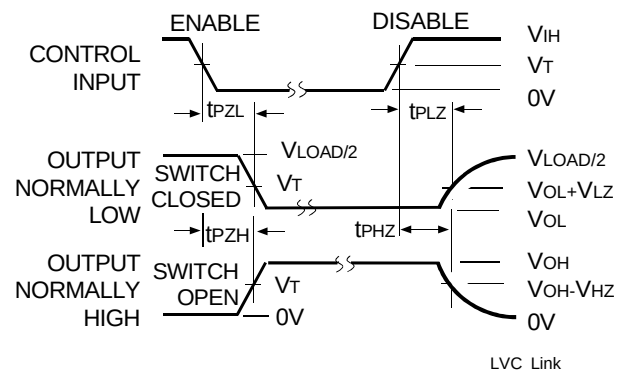


Enable and Disable Times

#### NOTE:

1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.

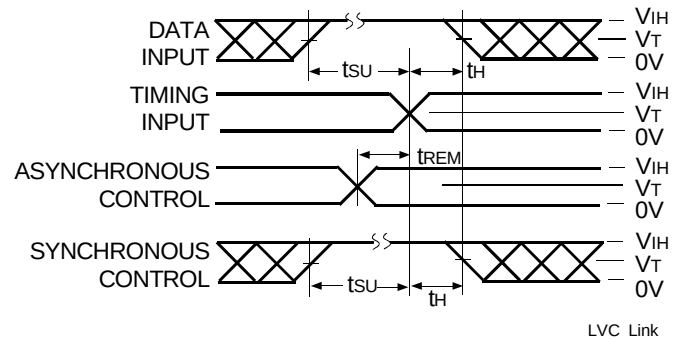

Set-up, Hold, and Release Times

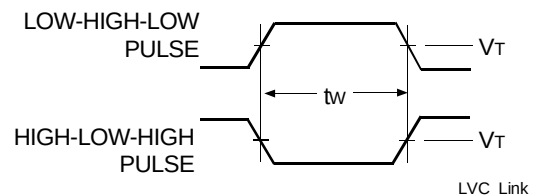

Pulse Width

## ORDERING INFORMATION

| IDT | XX          | LVC | X        | XX     | XXXX        | XX      |                                                |
|-----|-------------|-----|----------|--------|-------------|---------|------------------------------------------------|
|     | Temp. Range |     | Bus-Hold | Family | Device Type | Package |                                                |
|     |             |     |          |        |             | PV      | Shrink Small Outline Package                   |
|     |             |     |          |        |             | PA      | Thin Shrink Small Outline Package              |
|     |             |     |          |        |             | 344A    | One-to-Four Address/Clock Driver               |
|     |             |     |          |        |             | 16      | Double-Density, $\pm 24\text{mA}$              |
|     |             |     |          |        |             | Blank   | No Bus-hold                                    |
|     |             |     |          |        |             | 74      | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ |



**CORPORATE HEADQUARTERS**  
2975 Stender Way  
Santa Clara, CA 95054

**for SALES:**  
800-345-7015 or 408-727-6116  
fax: 408-492-8674  
www.idt.com

**for Tech Support:**  
logichelp@idt.com  
(408) 654-6459