

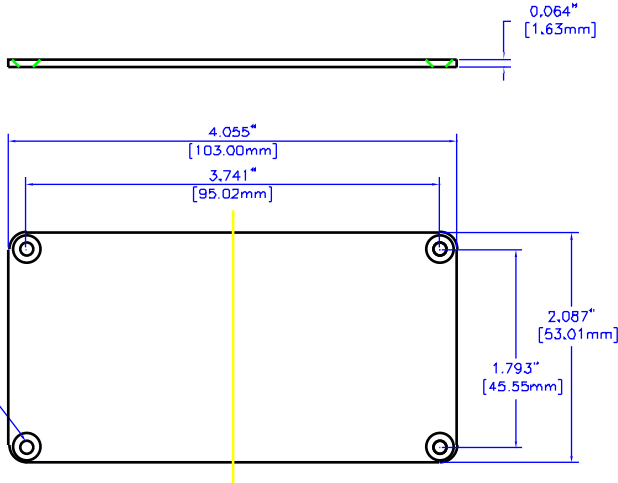
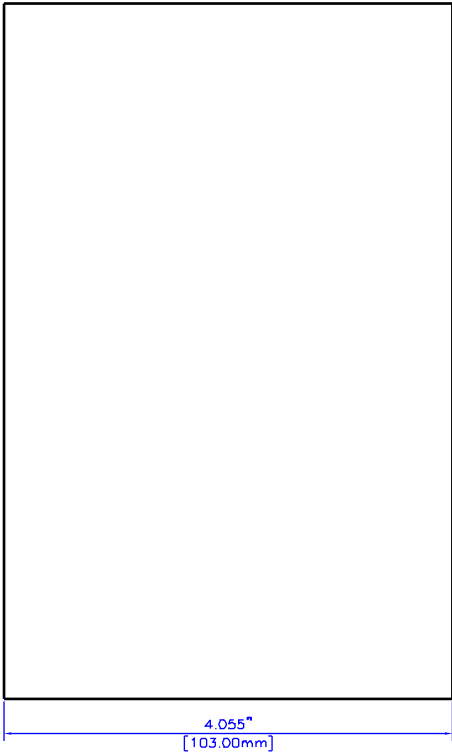



NOTES


Constructed from extruded Al with a minimum thickness of 0.060"(1.50mm)
Available in clear or Black anodized finish
Version 1 includes two Al end panels, and two Black plastic bezels.
Hardware and self-adhesive rubber feet included.

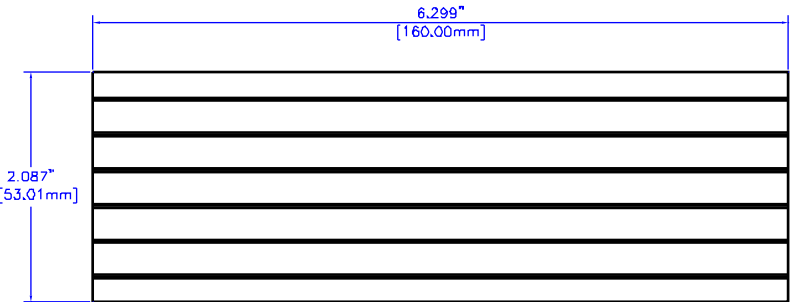


PANEL

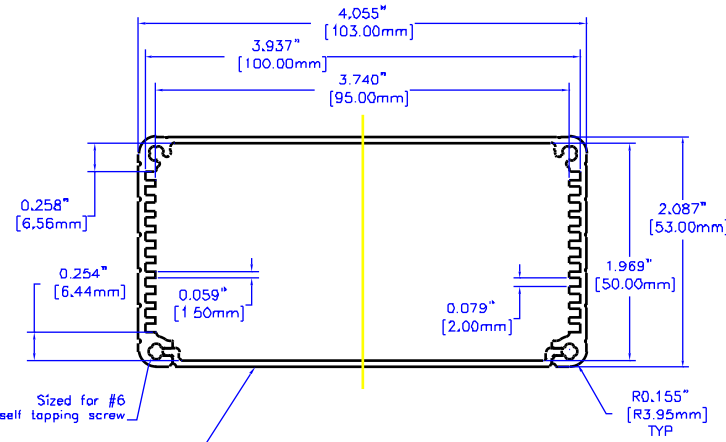

SECTION A-A
SCALE 2:1



SECTION B-B
SCALE 2:1

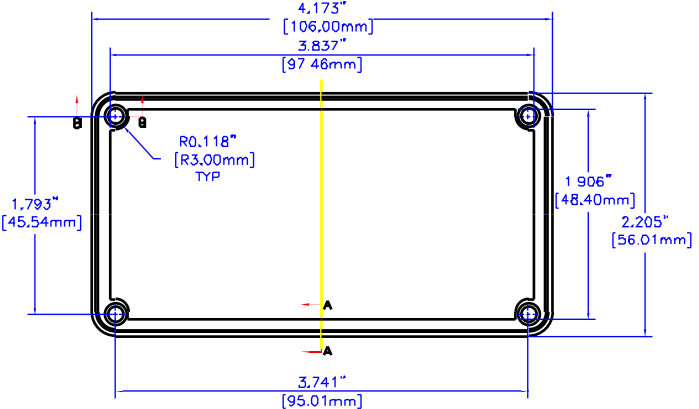

BEZEL

EXTRUSION

THIS DRAWING IS PROPRIETARY INFORMATION
OF HAMMOND MFG.CO.LTD. NOT TO BE USED
WITHOUT EXPRESSED WRITTEN PERMISSION
OF HAMMOND MFG.CO.LTD.

Rev	ECN	Description	Date	By
1	N/A	RELEASE	01 15 02	MM

Unless otherwise spec'd
dimensions are in inches
Tolerances are:
XX ± .1
XX ± .02
XXX ± .010
XXXX ± .0005
Holes ± .0050
Angles ± .5°




Own	M. MERCER
Date	01 15 02
Chk	---
Mat'l	Extruded Aluminum
Sheet	1 of 2

HAMMOND MANUFACTURING CO. LTD.
Electronics Group, Waterloo, Ont. - Cheektowaga, NY

HAMMOND 1455 SERIES
EXTRUDED ALUMINUM


Part# 1455N1601 Dwg: 1455N1601A

For the best fit print
on legal size paper.

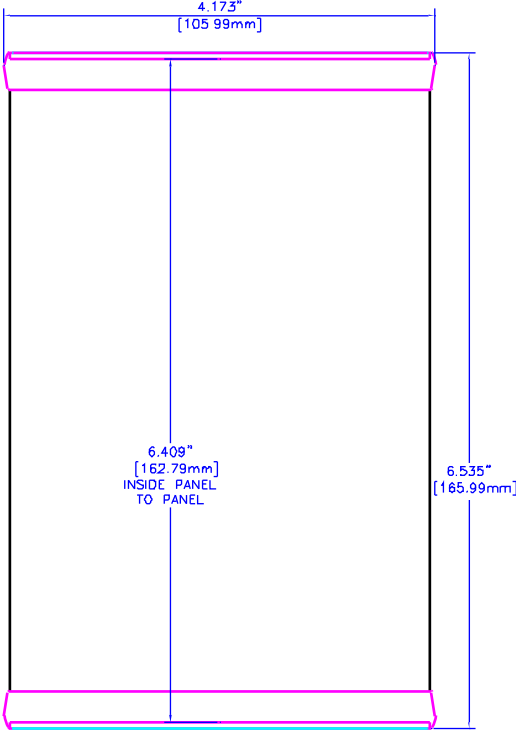

NOTES

Constructed from extruded Al with a minimum thickness of 0.060"(1.50mm)
Available in clear or Black anodized finish
Version 1 includes two Al end panels, and two Black plastic bezels.
Hardware and self-adhesive rubber feet included.

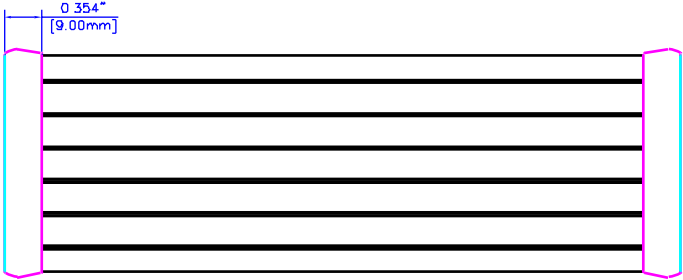

ASSEMBLY

THIS DRAWING IS PROPRIETARY INFORMATION OF HAMMOND MFG.CO.LTD. NOT TO BE USED WITHOUT EXPRESSED WRITTEN PERMISSION OF HAMMOND MFG.CO.LTD.																	XXXX Holes Angles		± .0050 ± .005 ± .5		Cnk ---		HAMMOND MFG. CO. LTD. EXTRUDED ALUMINUM													
							△		N/A		RELEASE		----		01 15 02		MM										Mat'l		Extruded Aluminum							
							Rev		ECN		Description				Date		By								Sheet		1 of 1		Part#		1455N1601		Dwg:		1455N1601A	