

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-.-

© COPYRIGHT - By - TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC
HBDIST
-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
E		UNIFY GROOVE OF GLUE ECO-15-012528	27Aug2015	YS.H	CSM



(D2)

TE

OJT-SS-105LM

UL US

TV-5

5V

DE**CSC**

5A 250V~

S μ

3/100A 250V~ T85

5A 250V~ T90 7E4

□ □ □

□ □ □

OEG

C

SEE NOTE 5

LOT NO.

(D2)

C:CHINA

□0.45


0.3

0.3

15.2±0.5

3.8±0.3

18.2±0.5

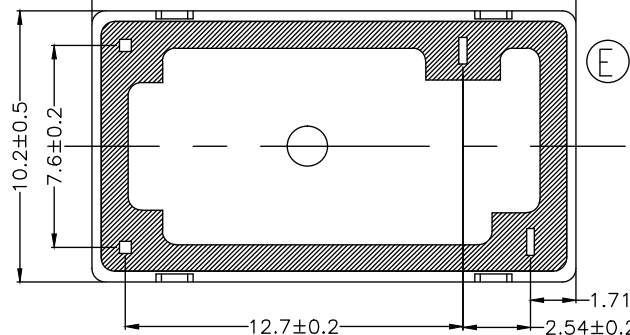

10.2±0.5

7.6±0.2

12.7±0.2

2.54±0.2

(E)



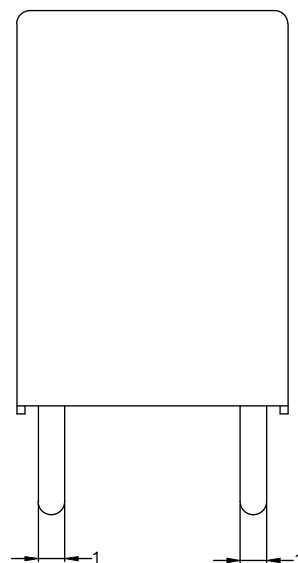


Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

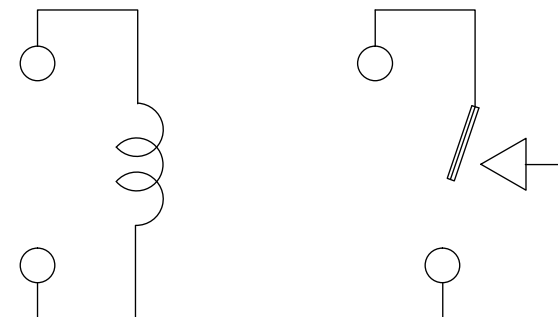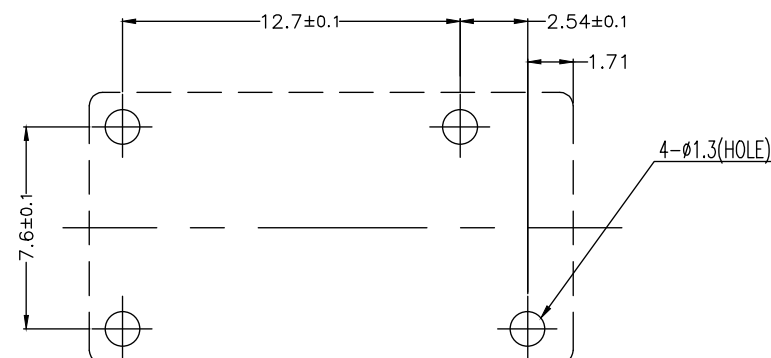

CONNECTION FIGURE

FIGURE FOR PRINTED CIRCUIT BOARD PROCESSING
(BOTTOM VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN Fu.Bo -

CHK Zhang.XN -

APVD Yang.Wen -

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING

TE

TE Connectivity

NAME

OJT-SS-1**LM.000 CUSTOMER DRAWING

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=

1461492

SCALE 5:1

SHEET 1 OF 2

REV E

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-.-.

© COPYRIGHT - By - TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC
HBDIST
-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-


107-79010	1461492-7	OJT-SS-124LM,000	24V	OJT-SS-124LM	g
107-79010	1461492-6	OJT-SS-118LM,000	18V	OJT-SS-118LM	f
107-79010	1461492-5	OJT-SS-112LM,000	12V	OJT-SS-112LM	e
107-79010	1461492-4	OJT-SS-109LM,000	9V	OJT-SS-109LM	d
107-79010	1461492-3	OJT-SS-106LM,000	6V	OJT-SS-106LM	c
107-79010	1461492-2	OJT-SS-105LM,000	5V	OJT-SS-105LM	b
107-79010	1461492-1	OJT-SS-103LM,000	3V	OJT-SS-103LM	a
PARKING SPEC	PART NO	EC TYPE NAME	PART B	PART A	TYPE

C1

D1

RELAY TYPE

NOTES:
B 1.LOT NO. SYSTEM AS FOLLOWING:



D2 5.ADD LOT NO. SYSTEM AS FOLLOWING;

1 1 A
I II III

I, DIGITS FOR DAY OF THE WEEK
1...MONDAY IN THIS WEEK;
2...TUESDAY IN THIS WEEK;
.....
7...SUNDAY IN THIS WEEK

II, DIGITS FOR SHIFT OF THE DAY

1...DAY SHIFT IN THIS DAY;
2...NIGHT SHIFT IN THIS DAY;

III, ONE CHARACTER DISTINGUISH THE LINE
IDENTITY, SUCH AS: A,B....Z

D2 2.TERMINAL DIMENSION IS BEFORE SOLDER DIP;

D2 3.FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH,THICKENSS AND DIAMETER.
+0.5mm FOR LENGTH.

D2 4.MARKING FROM INK TO LASER.

		EPOXY RESIN	SEAL (BASE & BOBBIN)	15
		3UEW	MAGNETIC WIRE	14
94V-0		P.B.T	CASE	13
94V-0		P.B.T	BASE	12
94V-0		P.B.T	BOBBIN	11
	SOLDER DIP	C.P WIRE	COIL TERMINAL	10
94V-0		P.B.T	CARD	9
		Ag ALLOY	MOVABLE CONTACT	8
		Ag ALLOY	NO.CONTACT	7
		STEEL	HINGE SPRING	6
	SOLDER DIP	PBP	NO.TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
	Cu-Ni PLATED	STEEL	CORE	3
	Cu-Ni PLATED	STEEL	ARMATURE	2
	Cu-Ni PLATED	STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Fu.Bo	-
DIMENSIONS: mm		CHK	Zhang,XN	-
		APVD	Yang,Wen	-
		PRODUCT SPEC		-
MATERIAL		APPLICATION SPEC		-
FINISH		WEIGHT		-
		CUSTOMER DRAWING		
		SIZE		A3
		CAGE CODE		00779
		DRAWING NO		1461492
		RESTRICTED TO		-
		SCALE		5:1
		SHEET		2 of 2
		REV		E