


Oscilloscope Probes and Probe Accessories




PROBE SELECTION GUIDE

Teledyne LeCroy has a wide variety of world class probes and amplifiers to compliment its product line. From the ZS high impedance active probes to the WaveLink differential probing system which offers bandwidths up to 25 GHz, Teledyne LeCroy probes and probe accessories provide optimum mechanical connections for signal measurement.

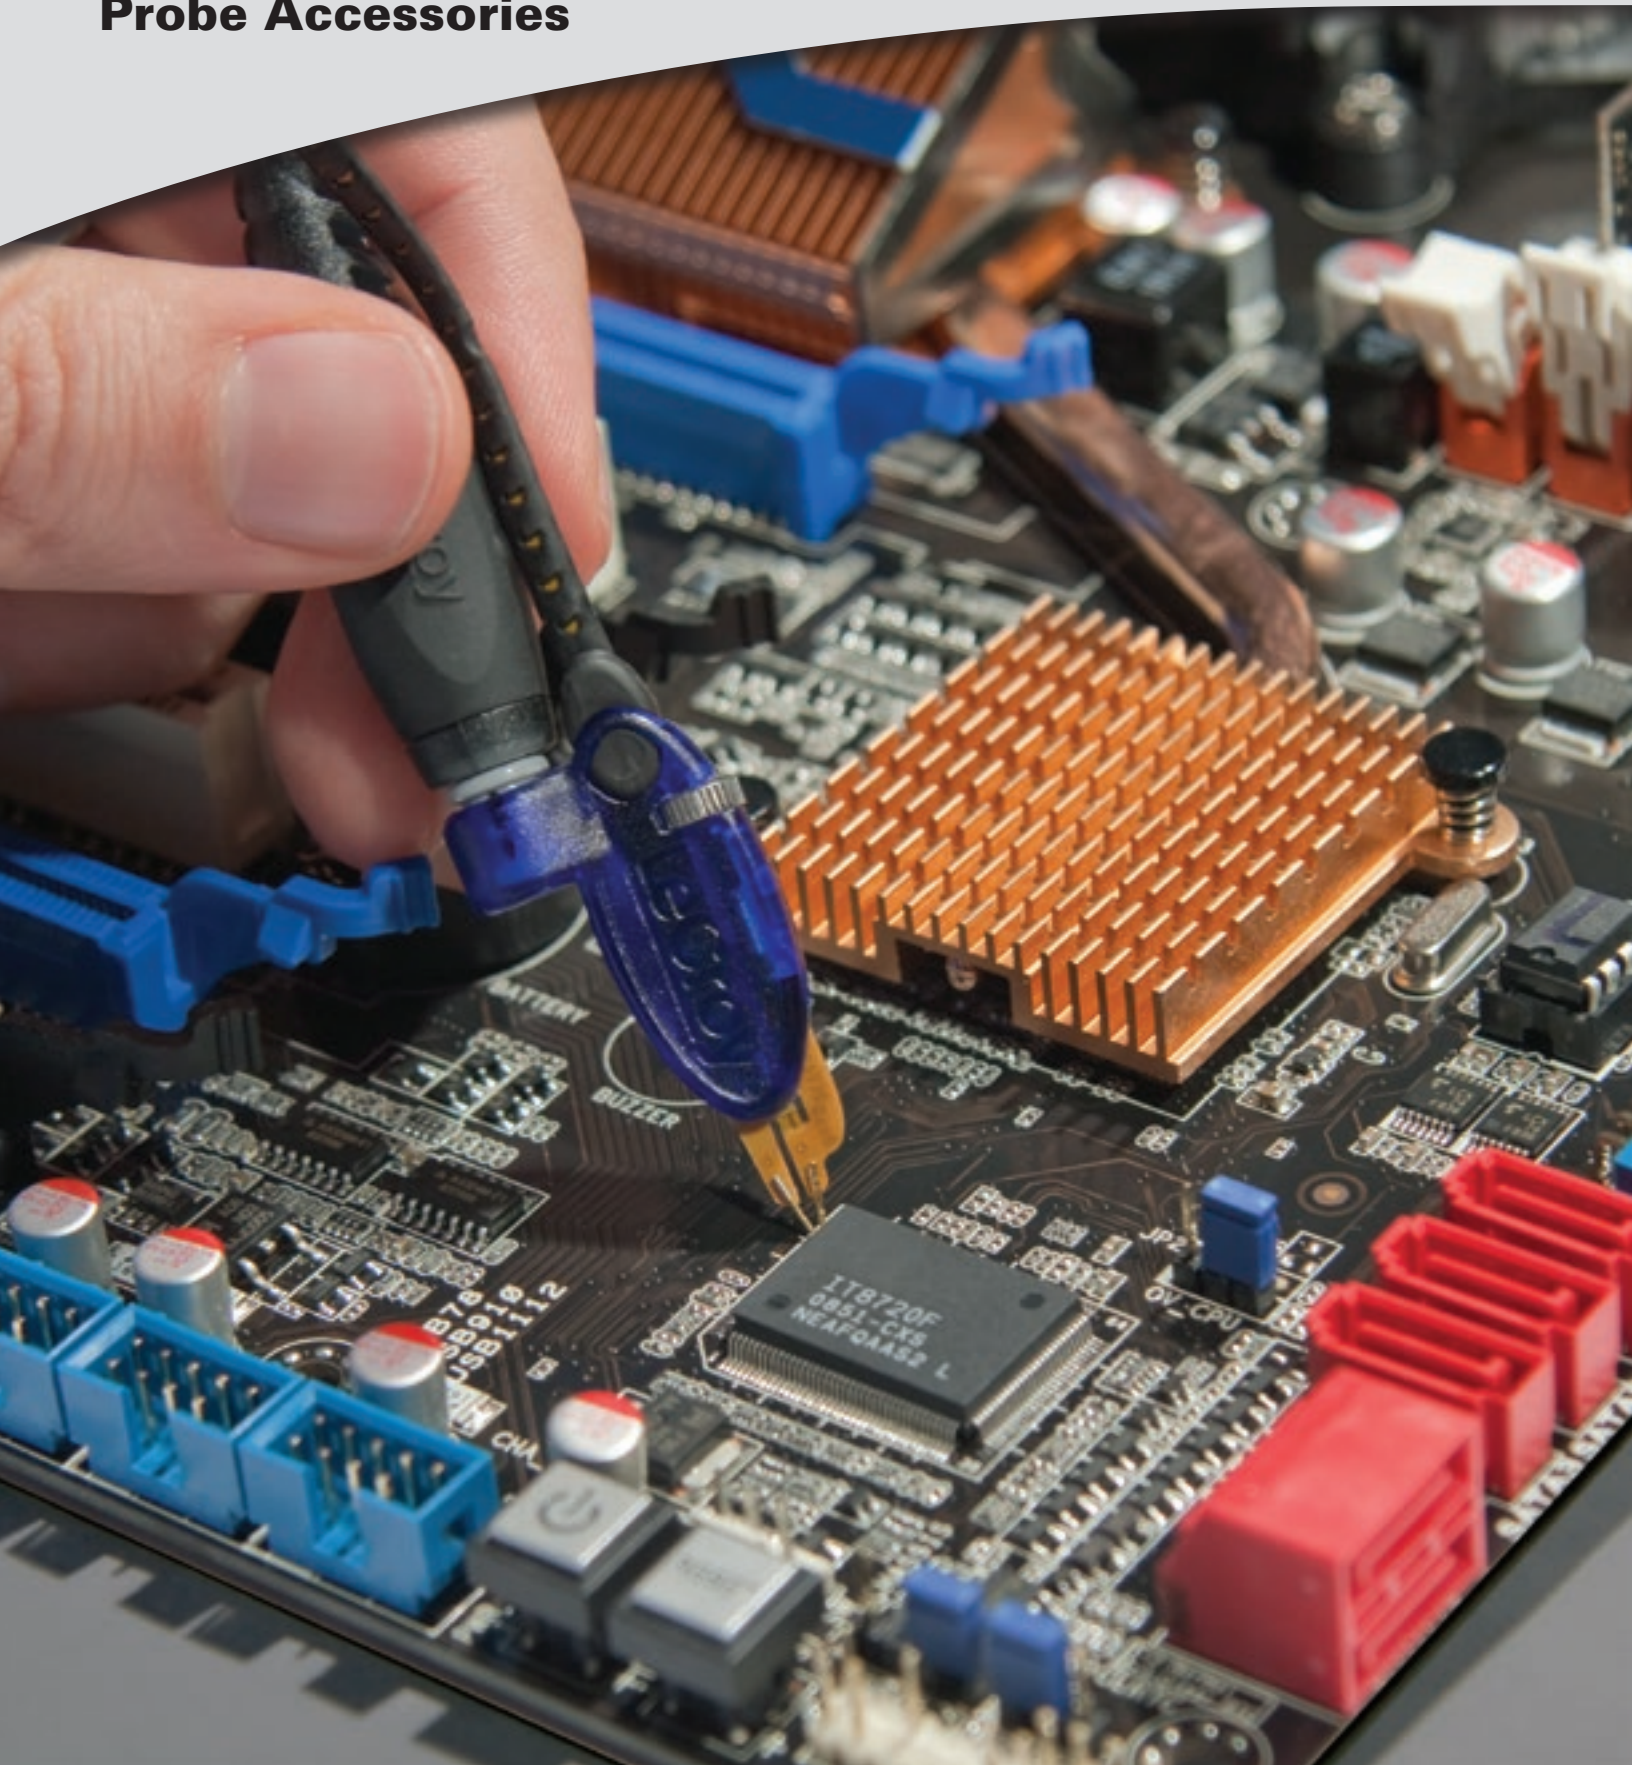

Front Cover:
Dxx10-PT Differential
Positioner Tip for the
WaveLink 4-6 GHz Probes.

	WaveAce Oscilloscopes	WaveJet 300A Oscilloscopes	WaveSurfer MXs-B / MSO MXs-B Oscilloscopes	HDO4000 Oscilloscopes	Vehicle Bus Analyzers	WaveRunner Xi-A / MXi-A Oscilloscopes	WaveRunner 6 Zi Oscilloscopes	HDO6000 Oscilloscopes	HRO 12-bit Oscilloscopes	WavePro/SDA/DDA/7 Zi/7 Zi-A Oscilloscopes	WaveMaster/SDA/DDA/8 Zi/8 Zi-A Oscilloscopes	LabMaster 9 Zi-A Oscilloscopes	LabMaster 10 Zi Oscilloscopes
Active Voltage Probes - p. 4 - 7													
ZS1000		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
ZS1500		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
ZS2500				✓	✓	✓				✓	✓	✓	
Current Probes - p. 8 - 11													
AP015		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
CP030		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
CP031		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
CP150		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
CP500		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Differential Probes - p. 12 - 23													
ZD200		✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	
ZD500		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
ZD1000		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
ZD1500		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
AP033		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
AP034		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
D410						✓				✓	✓	✓	
D420						✓				✓	✓	✓	
D300A-AT						✓				✓	✓	✓	
D600A-AT						✓				✓	✓	✓	
D610						✓				✓	✓	✓	
D620						✓				✓	✓	✓	
D830											✓	✓	
D830-PS											✓	✓	
D1030											✓	✓	
D1030-PS											✓	✓	
D1330											✓	✓	
D1330-PS											✓	✓	
WL-PLink-A-CASE											✓	✓	✓
WL-PBUS-CASE						✓			✓				
LPA-2.92											✓	✓	✓
WL-2.92MM-CASE											✓	✓	✓
D1305-A											✓	✓	✓
D1305-A-PS											✓	✓	✓
D1605-A											✓	✓	✓
D1605-A-PS											✓	✓	✓
D2005-A											✓	✓	✓
D2005-A-PS											✓	✓	✓
D2505-A											✓	✓	✓
D2505-A-PS											✓	✓	✓

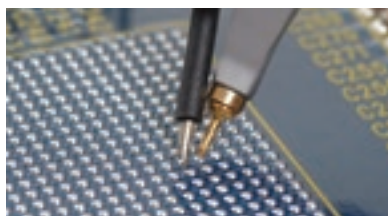

WaveAce Oscilloscopes
WaveJet 300A Oscilloscopes
WaveSurfer MXs-B / MSO
MXs-B Oscilloscopes
HDO4000 Oscilloscopes
Vehicle Bus Analyzers
WaveRunner Xi-A / MXi-A
Oscilloscopes
WaveRunner 6 Zi
Oscilloscopes
HDO6000 Oscilloscopes
HRO 12-bit Oscilloscopes
WavePro/SDA/DDA/7 Zi/7 Zi-A
Oscilloscopes
WaveMaster/SDA/DDA/8 Zi/Zi-A
Oscilloscopes
LabMaster 9 Zi-A Oscilloscopes
LabMaster 10 Zi Oscilloscopes

High Voltage Differential Probes - p. 24 - 27

ADP300			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
ADP305			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
AP031	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Differential Amplifiers - p. 28 - 31

DXC200			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DA101			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DA1855A			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DA1855A-PR2			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DA1855A-PR2-RM			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DA1855A-RM			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DXC-5100			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DXC100A			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

High Voltage Probes - p. 32 - 35

PPE1.2KV	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PPE20KV	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PPE2KV	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PPE4KV	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PPE5KV	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PPE6KV	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Optical Probes - p. 36 - 39

OE425					✓	✓	✓	✓	✓	✓	✓	✓
OE455					✓	✓	✓	✓	✓	✓	✓	✓
OE525									✓	✓	✓	✓
OE555									✓	✓	✓	✓
OE695G										✓	✓	✓

Passive Probes - p. 40 - 43


PP005A										✓		
PP006A		✓										
PP-007-WR-1						✓						
PP008-1							✓			✓		
PP009-1			✓	✓			✓	✓	✓			
PP010-1		✓										
PP011-1			✓	✓				✓				
PP016	✓											

Transmission Line Probes - p. 44 - 47

PP065		✓	✓	✓	✓	✓	✓		✓	✓	✓	
PP066									✓	✓	✓	

Note: Some probes require purchase of the amplifier and platform/cable assembly separately – Reference detailed literature for more information.

ACTIVE VOLTAGE PROBES

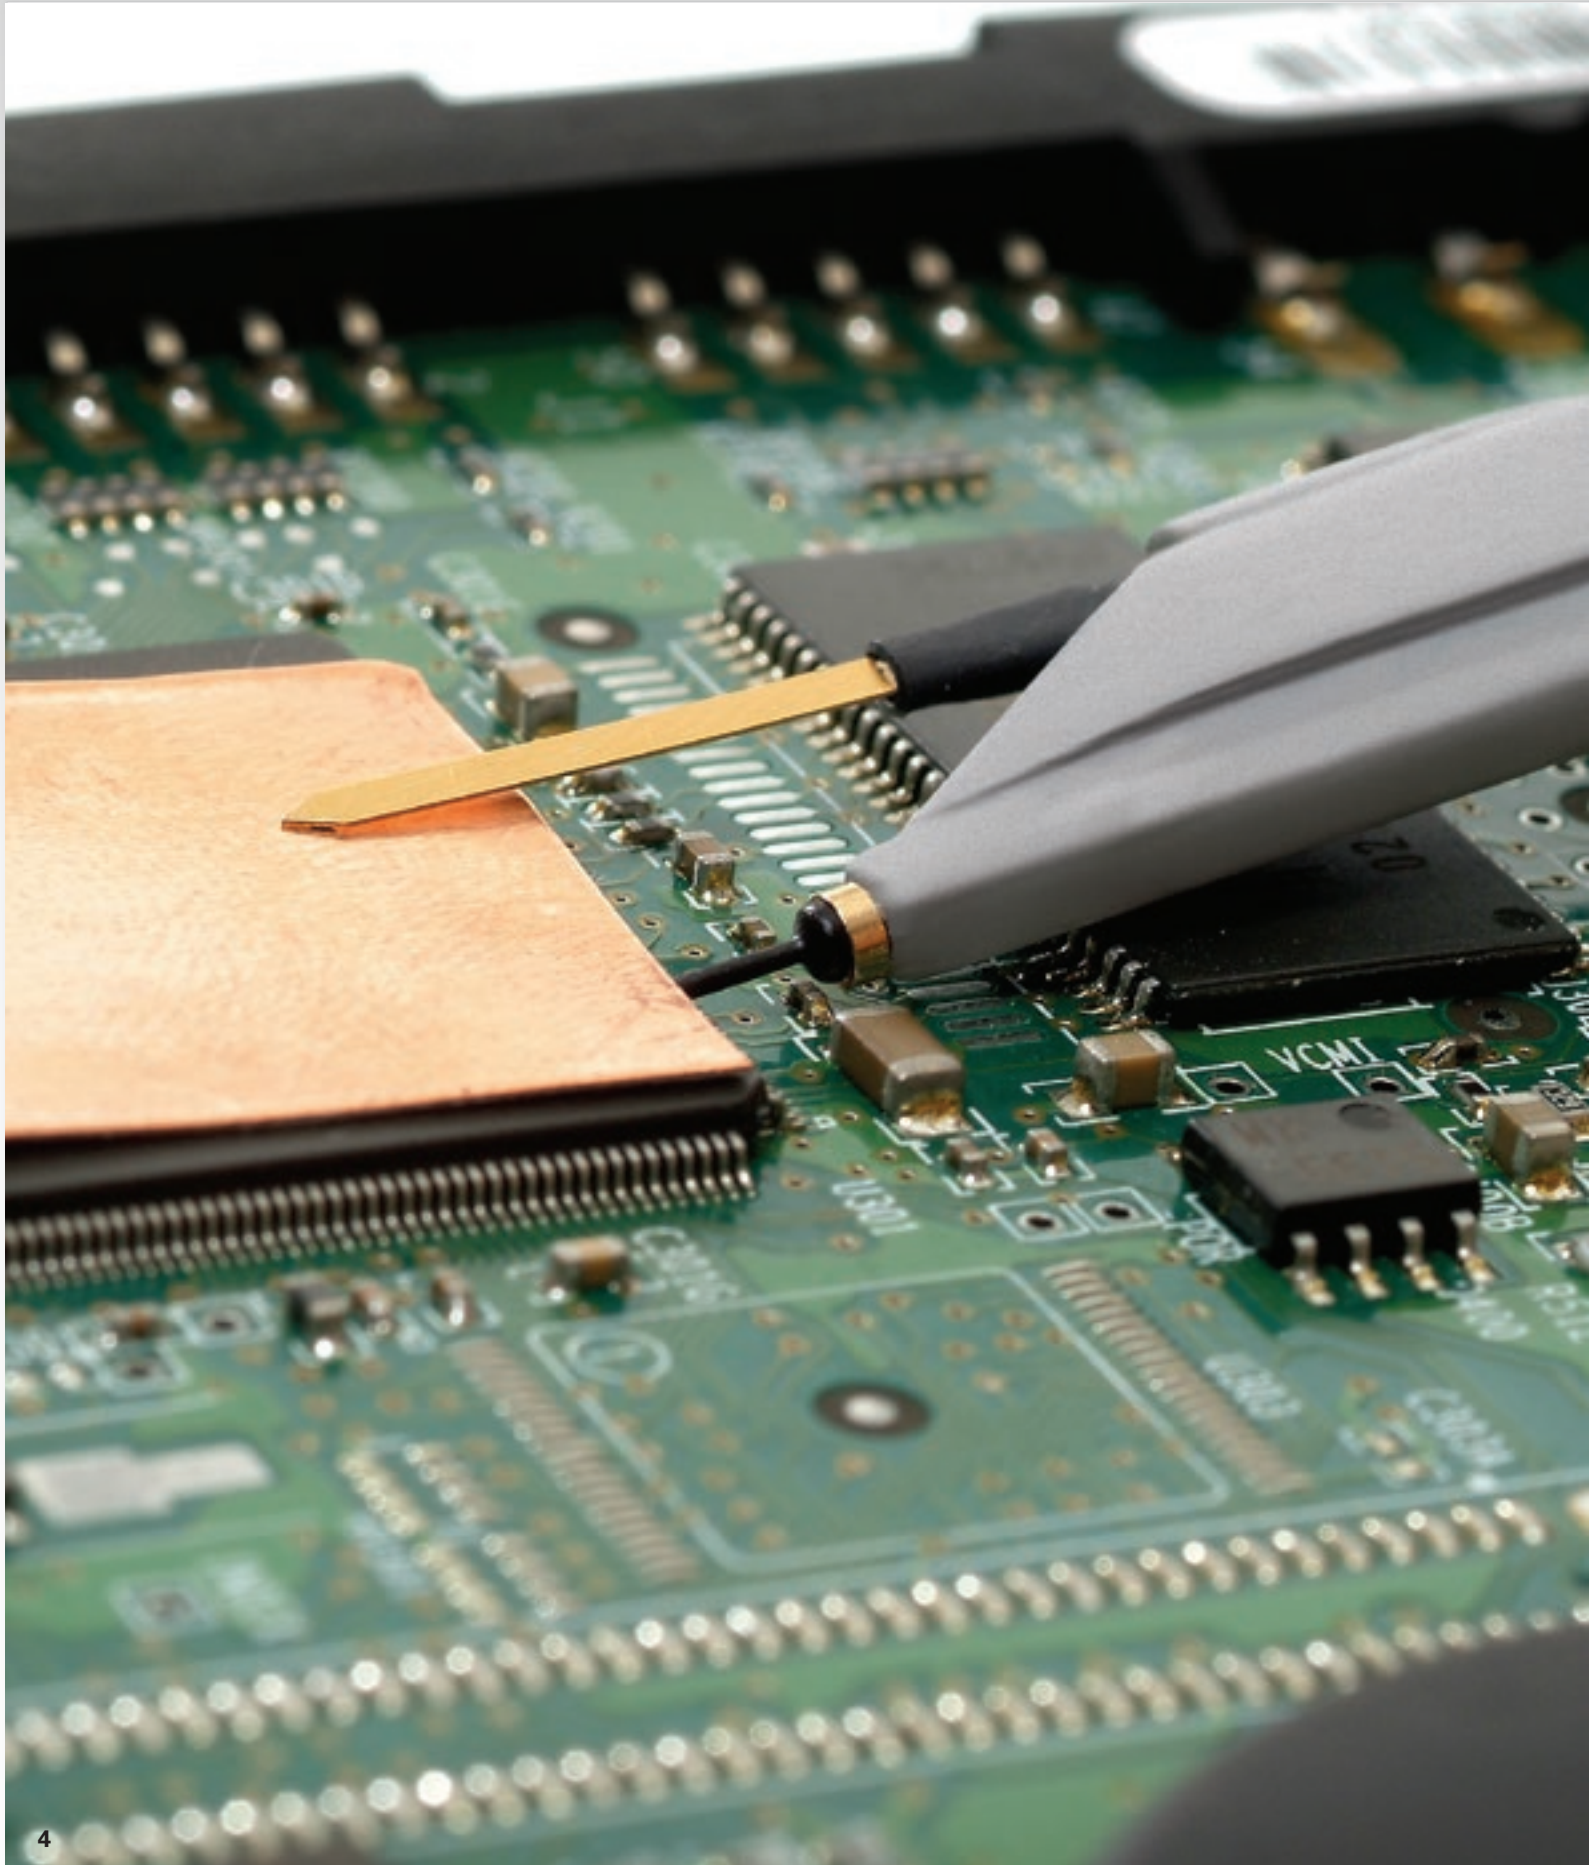

ACTIVE VOLTAGE PROBES

Engineers must commonly probe high-frequency signals with high signal fidelity. Typical passive probes with high input R and C provide good response at lower frequencies, but inappropriately load the circuit, and distort signals, at higher frequencies. Active voltage probes feature both high input R and low input C to reduce circuit loading across the entire probe/oscilloscope bandwidth. With low circuit loading, and a form factor that allows probing in confined areas, the active voltage probe becomes the everyday probe for all different types of signals and connection points.

Teledyne LeCroy
Active Voltage Probes
Model Numbers:

ZS1000

ZS1500

ZS2500

*Opposite page:
ZS Series High Impedance Active Probe*

ZS SERIES ACTIVE PROBES



Teledyne LeCroy
Active Voltage Probe
Model Numbers:

ZS1000


ZS1500

ZS2500

The ZS Series probes provide high impedance and an extensive set of probe tips and ground accessories to handle a wide range of probing scenarios. The high 1 M Ω input resistance and low 0.9 pF input capacitance mean this probe is ideal for all frequencies. The ZS Series probes provide full system bandwidth for all Teledyne LeCroy oscilloscopes having bandwidths of 2 GHz and lower.

High Impedance Reduces Circuit Loading Across Full Oscilloscope Bandwidth

Engineers must commonly probe high frequency signals with high signal fidelity. Typical passive probes with high input R and C provide good response at lower frequencies, but inappropriately load the circuit, and distort signals, at higher frequencies. The ZS Series features both high input R (1 M Ω and low input C (0.9 pF) to reduce circuit loading across the entire probe/oscilloscope bandwidth. With low circuit loading, and a form factor that allows probing in confined areas, the ZS Series becomes the everyday probe for all different types of signals and connection points. The ZS1000 is ideal for 200–600 MHz oscilloscopes. The ZS1500 is ideal for 1 GHz oscilloscopes and the ZS2500 is ideal for 2 GHz oscilloscopes.

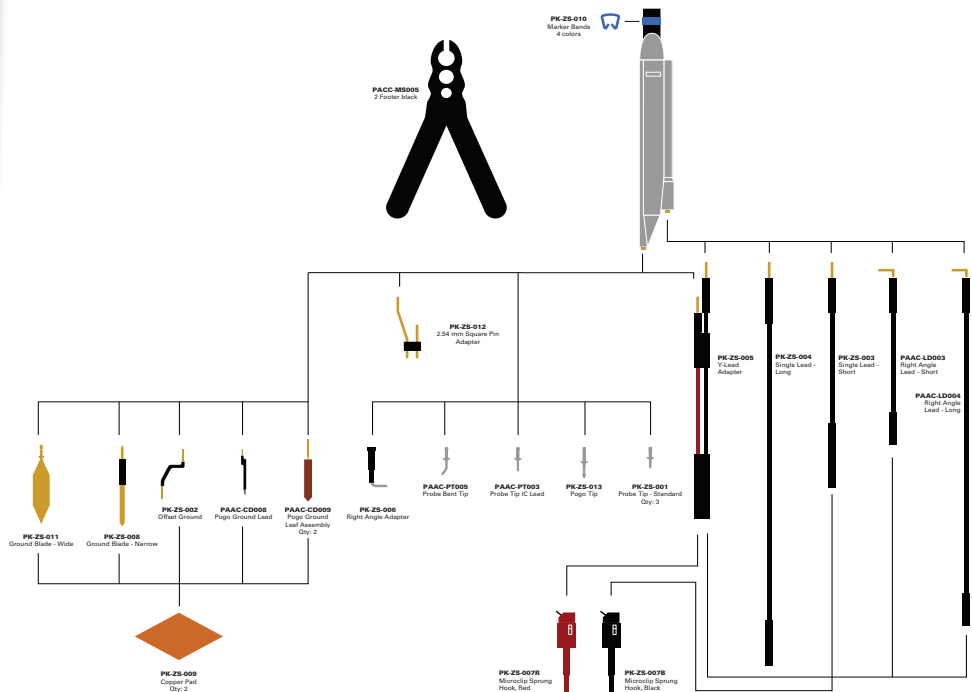

ZS SERIES ACTIVE PROBES

Specifications

ZS1000

ZS1500

ZS2500

Electrical Characteristics

Bandwidth (Probe Only)	1 GHz	1.5 GHz	2.5 GHz
Bandwidth (System)	600 MHz at probe tip with 600 MHz oscilloscope	1 GHz at probe tip with 1 GHz oscilloscope	2 GHz at probe tip with 2 GHz oscilloscope
Input Capacitance	0.9 pF		
DC Input Resistance	1 MΩ		
Probe Offset Range	N/A	±12 V	
Attenuation	÷10		
Input Dynamic Range	±8 V		
Non-destruct Voltage	20 V		

General Characteristics

Cable Length	1.3 m
--------------	-------

Ordering Information

Product Description

Product Code

Set of 4 ZS2500, 2.5 GHz, 0.9 pF, 1 M Ω High Impedance Active Probes	ZS2500-QUADPAK
Set of 4 ZS1500, 1.5 GHz, 0.9 pF, 1 M Ω High Impedance Active Probes	ZS1500-QUADPAK
Set of 4 ZS1000, 1 GHz, 0.9 pF, 1 M Ω High Impedance Active Probes	ZS1000-QUADPAK
2.5 GHz, 0.9 pF, 1 M Ω High Impedance Active Probe	ZS2500
1.5 GHz, 0.9 pF, 1 M Ω High Impedance Active Probe	ZS1500
1 GHz, 0.9 pF, 1 M Ω High Impedance Active Probe	ZS1000

Included with Standard Configuration

Instruction Manual, English	
Certificate of Calibration	
1-Year Warranty	
Straight Pin Lead – Short (Qty 1)	PK-ZS-003
Straight Pin Lead – Long (Qty 1)	PACC-LD004
Right Angle Pin Lead – Short (Qty 1)	PACC-LD003
Right Angle Pin Lead – Long (Qty 1)	PACC-LD004
Y Lead Adapter (Qty 1)	PK-ZS-005
Micro-Grabber Pair	PK-ZS-007R and PK-ZS-007B
Ground Blade – Wide	PK-ZS-011
Probe Tip – Standard (Qty 3)	PK-ZS-001
Right Angle Socket (Qty 1)	PK-ZS-006
Offset Ground – Z lead (Qty 1)	PK-ZS-002
Ground Blade – Narrow (Qty 1)	PK-ZS-008

Product Description

Product Code


Included with Standard Configuration (cont'd)

Copper Tape (Qty 2)	PK-ZS-009
Pogo Tip (Qty 1)	PK-ZS-013
2.54mm Square Pin Adapter	PK-ZS-012
Channel ID Clips (Set of 4 Colors)	PK-ZS-010
Freehand Probe Holder	PACC-MS005
Bent Tip (Qty 1)	PACC-PT005
IC Tip (Qty 1)	PACC-PT003
Pogo Ground Lead (Qty 1)	PACC-CD008
Pogo Leaf Ground Assembly (Qty 2)	PACC-CD009

Available Accessories

Discrete SMD Tip	PACC-PT004
Solder-In Ground	PACC-CD007
Ground Spring Hook	PACC-LD001
Square Pin Ground Spring	PACC-LD002

CURRENT PROBES

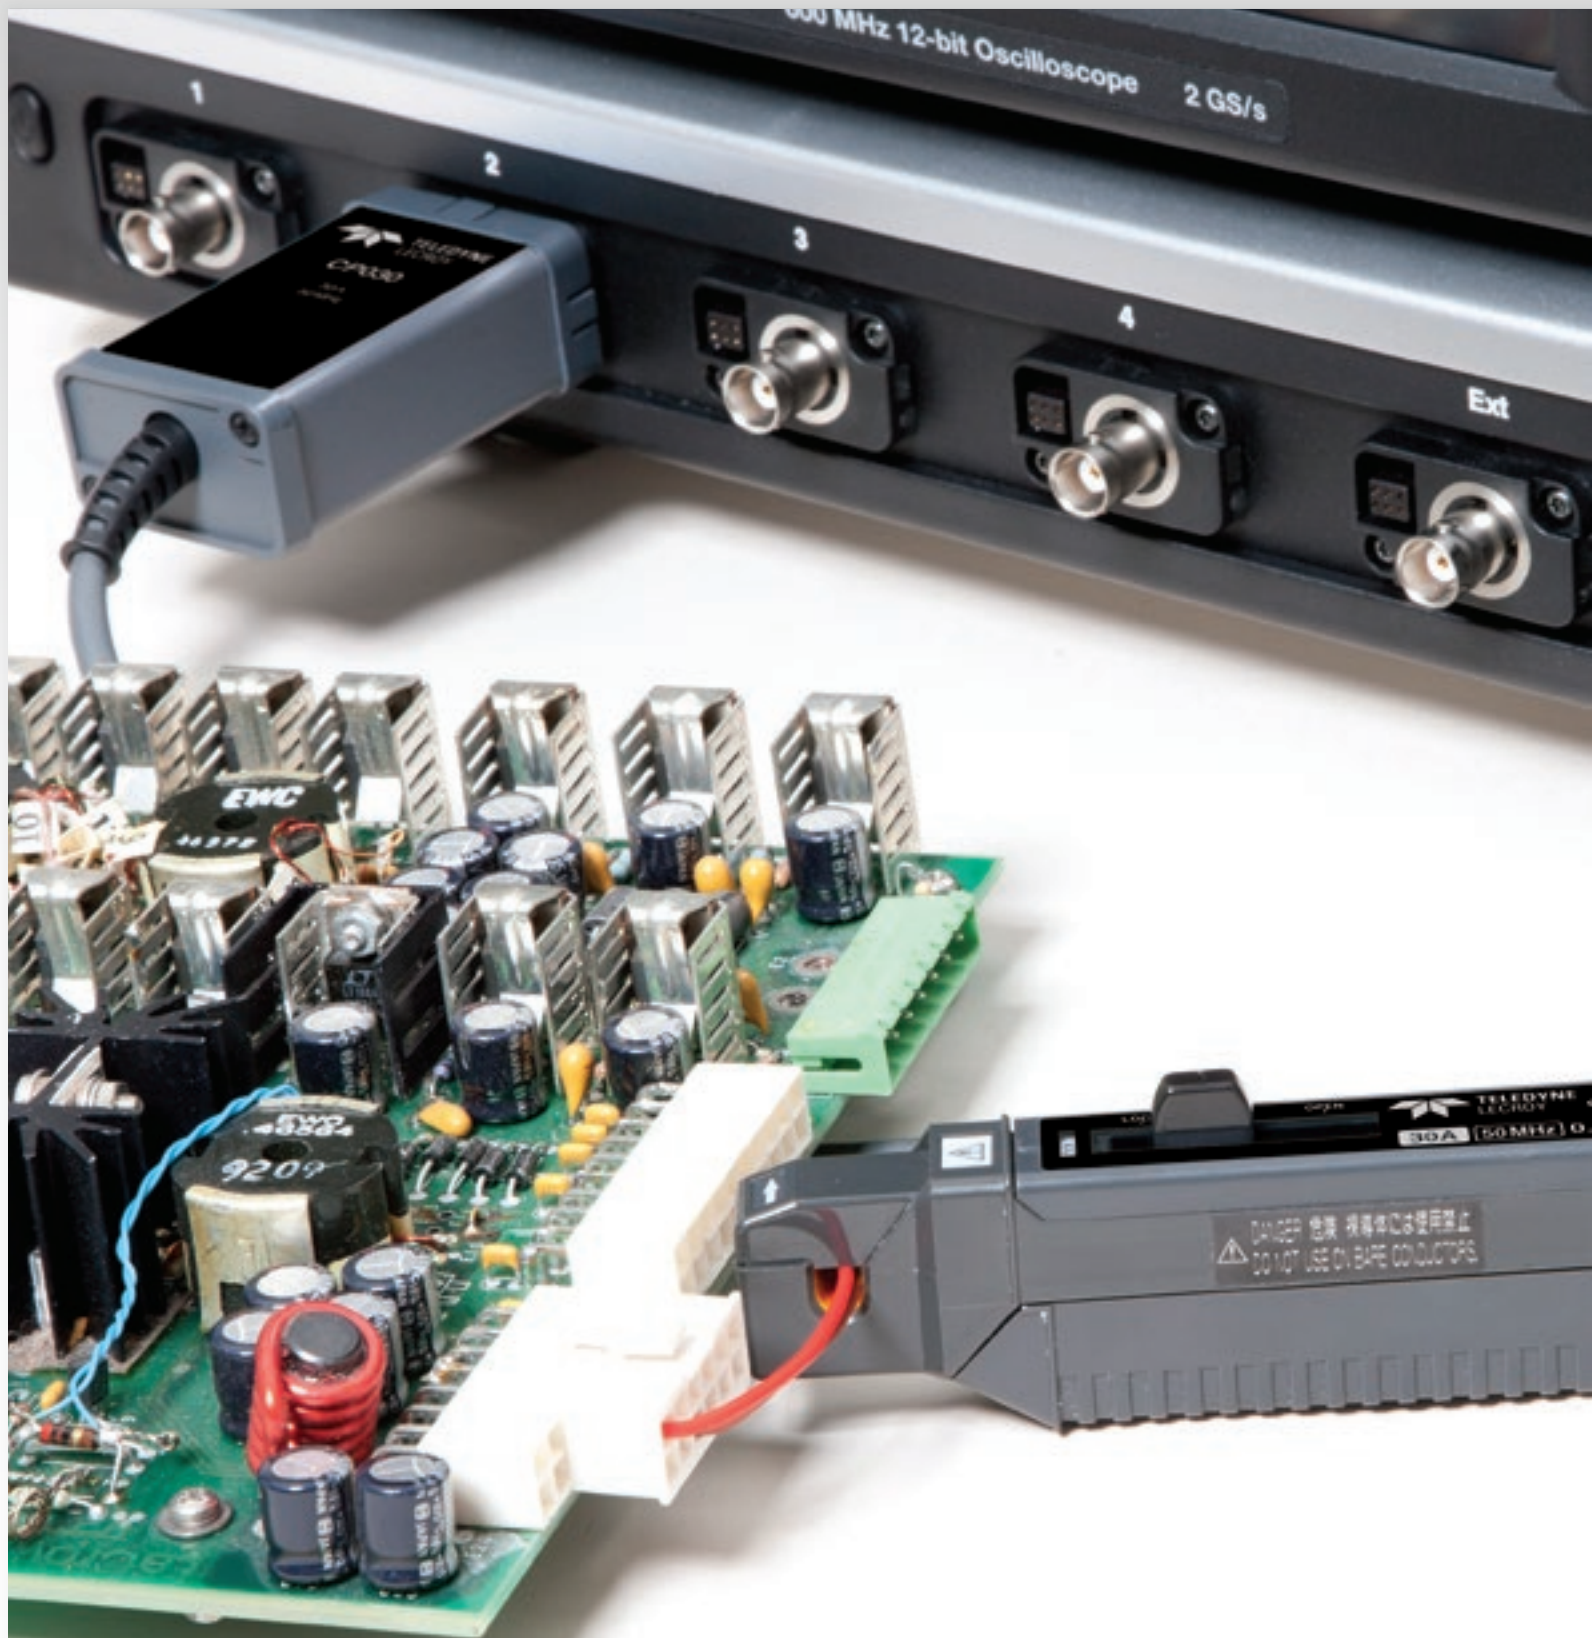

Measuring AC and DC Currents

Teledyne LeCroy current probes do not require the breaking of a circuit or the insertion of a shunt to make accurate and reliable current measurements. Based on a combination of Hall effect and transformer technology, Teledyne LeCroy current probes are ideal for making accurate AC, DC, and impulse current measurements.

Fully Integrated with Oscilloscope

Many current probes require external power supplies or amplifiers to display a waveform on the oscilloscope screen. All Teledyne LeCroy current probes are powered through the Teledyne LeCroy ProBus connection and require no additional hardware. Along with providing power, the ProBus connection allows the current probe and oscilloscope to communicate, resulting in current waveforms automatically displayed on screen in Amps, and calculated power traces scaled correctly in Watts. This full integration also allows for Degauss and Autozero functions to be done directly from the oscilloscope with a single button press.

Applications

Teledyne LeCroy current probes are available in a wide range of models for a wide range of applications. The full range of Teledyne LeCroy current probes includes models with bandwidths up to 100 MHz, peak currents up to 700 A and sensitivities to 10 mA/div. Multiple current probes can be used together to make measurements on three-phase systems, or a single current probe can be used with a voltage probe to make accurate instantaneous power measurements. Teledyne LeCroy current probes are often used in applications such as the design and test of switching power supplies, motor drives, electric vehicles, and uninterruptible power supplies.

Teledyne LeCroy
Current Probes
Model Numbers:

AP015

CP030

CP031

CP150

CP500

*Opposite page:
CP031, 30A, 100 MHz Current Probe.*

CURRENT PROBES



Teledyne LeCroy
Current Probes
Model Numbers:

CP031
CP030
AP015 / DCS015
CP150
CP500



CP031 – 30A, 100 MHz

The CP031 is Teledyne LeCroy's highest bandwidth current probe. Along with the high 100 MHz bandwidth the CP031 can probe continuous currents of 30 A_{rms} and peak currents up to 50 A. The CP031 features a small form factor making it easier to probe on a crowded, compact board.



CP030 – 30 A, 50 MHz

The CP030 was designed with a small form factor for today's crowded boards. The small jaw can probe currents in tight spaces and still clamp onto conductors up to 5 mm in diameter. Continuous currents of 30 A_{rms} and peak currents of 50 A can be measured by the CP030, which also features a 50 MHz bandwidth.



AP015 – 30 A, 50 MHz

The AP015 current probe can measure continuous current of 30 A_{rms} and peak pulses of up to 50 A for durations up to 10 seconds. This probe also features an over-heating protection circuit, which will display an on-screen warning to the user to prevent damage. A probe unlock detection feature is also built in to the AP015 to ensure accurate measurements.



DCS015 – Deskew Calibration Source for AP015

The DCS015 calibration source has both voltage and current time-aligned signals, which enables the precise deskew of voltage and current probes. Most voltage probes along with the CP031, CP030 and AP015 are compatible with the DCS015.

CURRENT PROBES



CP150 – 150 A, 10 MHz

Features:

- 150 Arms continuous current
- 500 A_{peak}
- 10 MHz bandwidth



CP500 – 500 A, 2 MHz

Features:

- 500 Arms continuous current
- 700 A_{peak}
- 2 MHz bandwidth

Specifications

	CP031 ^{††}	CP030 ^{††}	AP015	CP150	CP500
Electrical Characteristics					
Max. Continuous Input Current	30 A			150A	500 A
Bandwidth	100 MHz	50 MHz	50 MHz	10 MHz	2 MHz
Max. Peak Current at Pulse Width	50 A ≤ 10 μs		50 A ≤ 10 s	500 A ≤ 30 μs	700 A
Rise Time (typical)	≤ 3.5 ns	≤ 7 ns		< 35 ns	< 175 ns
Minimum Sensitivity	20 mA/div		10 mA/div	20 0mA/div	
Max. In-Phase Current	-			500 A	1150 A
Low-Frequency Accuracy	1%				
AC Noise	≤ 2.5 mA		-	≤ 25 mA	25 mA
Coupling	AC, DC, GND				

General Characteristics

Cable Length	1.5 m	2 m	6 m	
Weight	240 g	300 g	500 g	630 g
Max. Conductor Size (diameter)	5 mm		20 mm	
Interface	ProBus, 1 MΩ only [‡]			
Usage Environment	Indoor			
Operating Temperature	0° C to 40° C			
Max. Relative Humidity	80%			
Max. Altitude	2000 m			
Maximum Insulated Wire Voltage	300 VCAT I, 150 V CAT II	300 VCAT I		600 VCAT I, 300 V CAT II

* Guaranteed at 23 °C ±3 °C


† The CP031 and CP030 are compatible with Teledyne LeCroy X-Stream oscilloscopes running firmware version 4.3.1.1 or greater.

‡ Requires AP-1M for use with 50 Ω input only oscilloscopes

Ordering Information

Product Description	Product Code	Product Description	Product Code
30 A; 100 MHz Current Probe - AC/DC; 30 A _{rms} ; 50 A _{peak} Pulse	CP031	150 A; 10 MHz Current Probe - AC/DC; 150 A _{rms} ; 500 A _{peak} Pulse	CP150
30 A; 50 MHz Current Probe - AC/DC; 30 A _{rms} ; 50 A _{peak} Pulse	CP030	500 A; 2 MHz Current Probe - AC/DC; 500 A _{rms} ; 700 A _{peak} Pulse	CP500
30 A; 50 MHz Current Probe - AC/DC; 30 A _{rms} ; 50 A _{peak} Pulse	AP015	Deskew Calibration Source for AP015	DCS015

DIFFERENTIAL PROBES

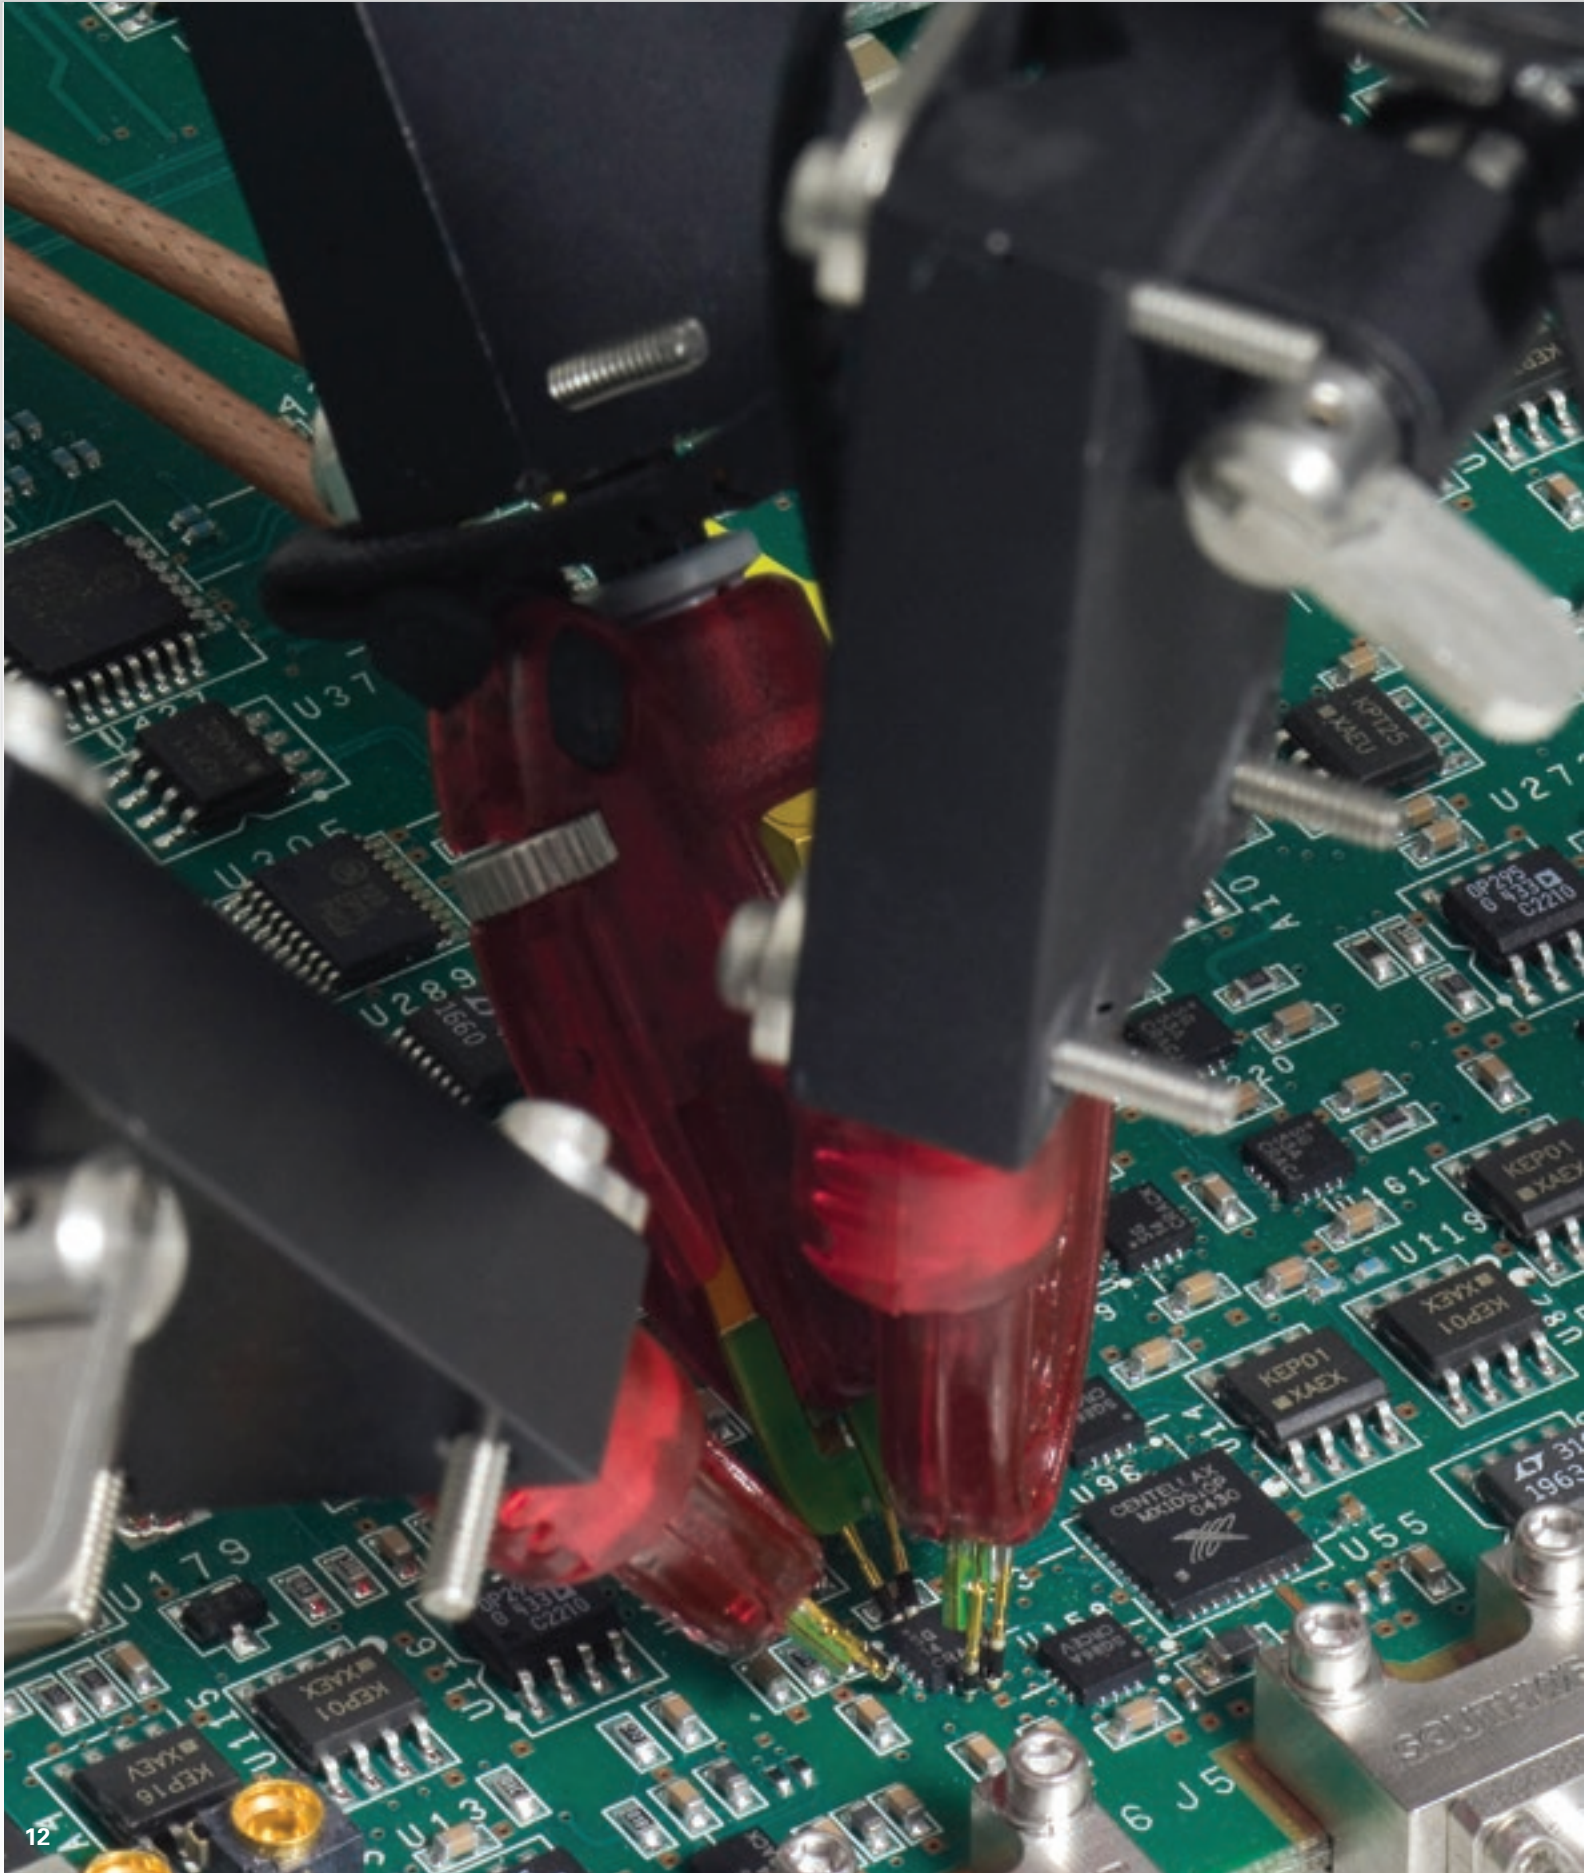

DIFFERENTIAL PROBES

Differential active probes are like two probes in one. Instead of measuring a test point in relation to a ground point (like single-ended active probes), differential probes measure the difference in voltage of a test point in relation to another test point.

Teledyne LeCroy
Differential Probes
Model Numbers:

200 MHz - 1.5 GHz

ZD200

ZD500

ZD1000

ZD1500

AP033

AP034

3 GHz - 6 GHz

D410

D410-PS

D420

D420-PS

D300A-AT

D600A-AT

D610

D610-PS

D620

D620-PS

8 GHz - 13 GHz

D830

D1030

D1330

11 GHz - 25 GHz

D1305-A

D1605-A

D2005-A

D2505-A

*Opposite page:
WaveLink® High Bandwidth Differential Probing System
(13 GHz – 25 GHz)*

ZD SERIES DIFFERENTIAL PROBES



Teledyne LeCroy
Differential Probe
Model Numbers:

ZD200
ZD500
ZD1000
ZD1500

The ZD Series probes provide wide dynamic range, excellent noise and loading performance and an extensive set of probe tips, leads, and ground accessories to handle a wide range of probing scenarios. The low 1 pF capacitance means this probe is ideal for all frequencies. The ZD Series differential probes provide full system bandwidth for all Teledyne LeCroy Oscilloscopes 1.5 GHz and lower.

Fully Integrated


With the ProBus interface, the ZD500, 1000, and 1500 becomes an integral part of the oscilloscope. All probe gain and offset controls are transparent to the user, making it easier to probe the circuit without concern for which gain setting to choose. When used with a Teledyne LeCroy digital oscilloscope, no external power supply is required.

Wide Dynamic Range

The ZD500, 1000, 1500 probes provides transparent probe attenuation so signals are always optimized for the display. The differential range is 18 V_{p-p} with a differential offset of ± 8 and common mode range of ± 10 V, making this versatile for every probing application.

Wide Applications

The wide dynamic range of 16 V_{p-p} and offset range of ± 8 suit this probe to a wide range of applications and signal types. The ZD differential probes are ideally suited for Automotive, Serial Data, power, and general purpose use.

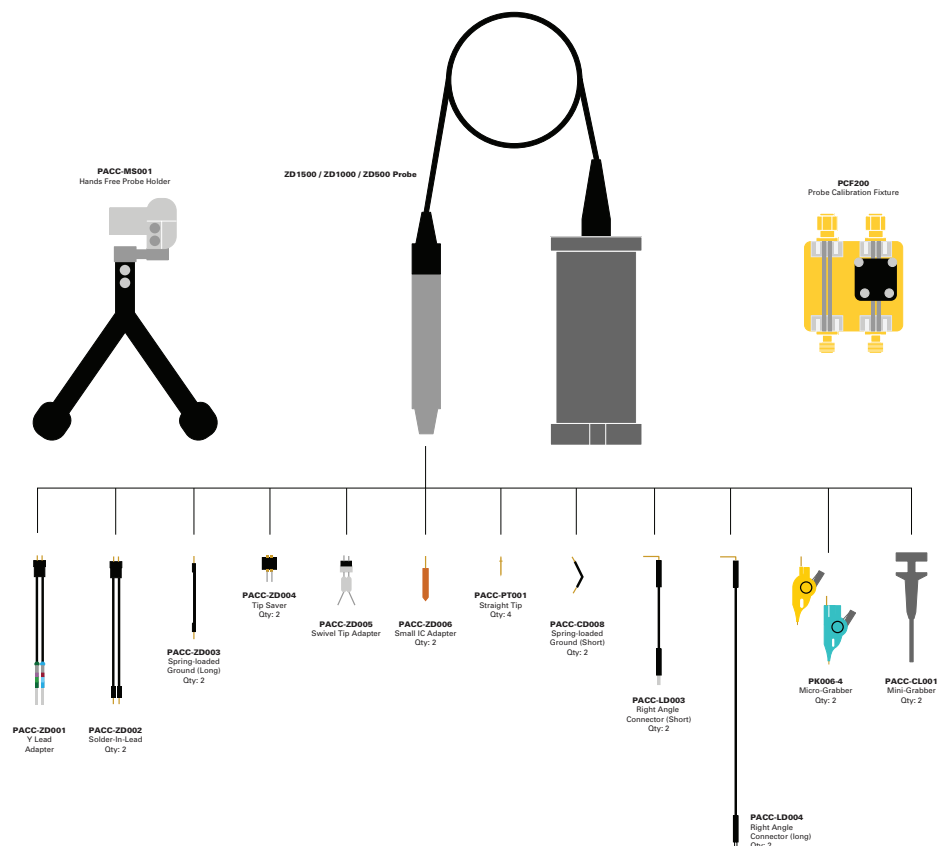

ZD SERIES DIFFERENTIAL PROBES

Specifications

Electrical Characteristics

	ZD1500	ZD1000	ZD500	ZD200
Bandwidth (Warranted)	1500 MHz	1000 MHz	500 MHz	200 MHz
Bandwidth (Typical)	1700 MHz	1200 MHz	650 MHz	-
Risetime 10–90% (Typical)	270 ps	375 ps	650 ps	1.75 ns
Risetime 20–80% (Typical)	200 ps	280 ps	500 ps	-
LF Attenuation Accuracy (Warranted)	2%			1%
Zero Offset (Typical) (within 15 minutes after autozero)	5 mV			-
System Noise (Typical)	1.75 mV _{rms}	1.75 mV _{rms}	1.3 mV _{rms}	-
Probe Noise Density (Typical)	38 nV/rt (Hz)			3 mV _{rms}
Input Differential Range (Nominal)	±8 V (16 V _{p-p})			± 20 V
Differential Offset Range (Nominal)	±18 V			-
Offset Gain Accuracy (Typical)	2%			-
Common Mode Range (Nominal)	±10 V			± 60 V
Maximum Non-destruct Voltage (Nominal)	30 V			-
CMRR (Typical)	60 dB 50/60 Hz 30 dB 20 MHz 25 dB @ 1500 MHz	60 dB 50/60 Hz 30 dB 20 MHz 25 dB @ 1000 MHz	60 dB 50/60 Hz 30 dB 20 MHz 25 dB 500 MHz	80 dB @ 60 Hz 50 dB@10 MHz
DC Input Resistance (Nominal)	50 kΩ (Common Mode) 120 kΩ (Differential Mode)			250 kΩ (Common Mode) 1 MΩ (Differential Mode)
Differential Input Capacitance (Typical)	< 1.0 pF			3.5 pF

Ordering Information

Product Description	Product Code	Product Description	Product Code
200 MHz, 3.5 pF, 1 MΩ Active Differential Probe	ZD200	Right Angle Connector Long, Qty 2	PACC-LD004
500 MHz, 1.0 pF, 1 MΩ Active Differential Probe	ZD500	Micrograbber, Qty 2	PK006-4
1 GHz, 1.0 pF, 1 MΩ Active Differential Probe	ZD1000	Minigrabber, Qty 2	PACC-CL001
1.5 GHz, 1.0 pF, 1 MΩ Active Differential Probe	ZD1500	Short Spring Loaded Bendable Ground, Qty 2	PACC-CD008
		Probe Calibration Fixture, Qty 1	PCF200
		ZD Replacement Kit	PK111
		Hands Free Probe Holder, Qty1	PACC-MS001

Standard Accessories

Y Lead Adapter, Qty 1	PACC-ZD001
Solder-In Lead, Qty 2	PACC-ZD002
Long Spring Loaded Bendable Ground, Qty 2	PACC-ZD003
Tip Saver, Qty 2	PACC-ZD004
Swivel Tip Adapter	PACC-ZD005
Small IC Adapter, Qty 2	PACC-ZD006
Replacement Accessory Kit for ZD200	PACC-ZD007
Replacement Leadset for ZD200	PACC-ZD008
Straight Tip, Qty 4	PACC-PT001
Right Angle Connector Short, Qty 2	PACC-LD003

WAVELINK LOW BANDWIDTH DIFFERENTIAL PROBES



Teledyne LeCroy WaveLink
Low Bandwidth Differential
Probe and Accessory
Model Numbers:


D410
D410-PS
D420
D420-PS
D300A-AT
D600A-AT
D610
D610-PS
D620
D620-PS
WL-PBUS-CASE
WL-PLINK-CASE
Dx10-PT-KIT
Dx20-PT-KIT
Dx10-HiTemp
Dx20-HiTemp

WaveLink® probes provide industry leading technology for wideband signal connection to test instruments. The first differential probes to employ SiGe technology, they deliver full system bandwidth when used with WaveRunner®, WavePro®, WaveMaster®, DDA and SDA oscilloscopes up to 6 GHz.

WaveLink probes:

- Maintain good loading characteristics across the frequency span
- Optimized for gain, noise and bandwidth for optimal performance
- Offer broad range of dynamic range and noise over gain settings by incorporating automatic probe attenuation changes

WaveLink is the first differential probe to use a unique calibration process to achieve superb waveform fidelity for routine voltage measurements. Calibration coefficients “fine tune” the frequency response of each WaveLink probe and are individually determined during factory calibration and programmed into the probe. The SDA, DDA, WaveMaster, WaveRunner, or WavePro Series oscilloscopes read this data and use it to digitally compensate the entire system response for superior fidelity.

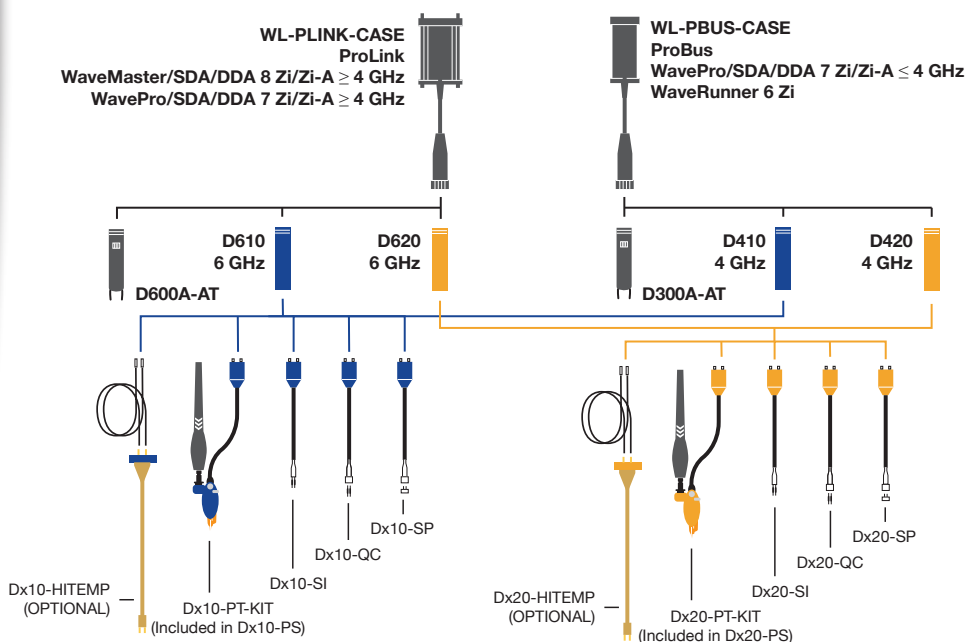

WAVELINK LOW BANDWIDTH DIFFERENTIAL PROBES

	D610, D610-PS	D620, D620-PS	D410, D410-PS	D420, D420-PS	D600A-AT	D300A-AT
Bandwidth* (Probe only, guaranteed) (System bandwidth, typical)	Dx10-SI and Dx10-PT Tips 6 GHz Dx10-HiTemp 5 GHz Dx10-QC Tip 4 GHz Dx10-SP Tip 3 GHz	Dx20-SI and Dx20-PT Tips 6 GHz Dx20-HiTemp 5 GHz Dx20-QC Tip 4 GHz Dx20-SP Tip 3 GHz	Dx10-SI, Dx10-HiTemp, Dx10-QC and Dx10-PT Tips 4 GHz Dx10-SP Tip 3 GHz	Dx20-SI, Dx20-HiTemp, Dx20-QC and Dx20-PT Tips 4 GHz Dx20-SP Tip 3 GHz	6 GHz	3 GHz
Rise Time* (10–90%)	Dx10-SI and Dx10-PT Tips 75 ps (typical) Dx10-HiTemp 90 ps (typical) Dx10-QC Tip 122.5 ps (typical) Dx10-SP Tip 150 ps (typical)	Dx20-SI and Dx20-PT Tips 75 ps (typical) Dx20-HiTemp 90 ps (typical) Dx20-QC Tip 122.5 ps (typical) Dx20-SP Tip 150 ps (typical)	Dx10-SI, Dx10-HiTemp, and Dx10-PT Tips 112 ps (typical) Dx10-QC Tip 122.5 ps (typical) Dx10-SP Tip 150 ps (typical)	Dx20-SI, Dx20-HiTemp, and Dx20-PT Tips 112 ps (typical) Dx20-QC Tip 122.5 ps (typical) Dx20-SP Tip 150 ps (typical)	<75 ps (typical)	<149 ps (typical)
Rise Time* (20–80%)	Dx10-SI and Dx10-PT Tips 56 ps (typical) Dx10-HiTemp 67.5 ps (typical) Dx10-QC Tip 92 ps (typical) Dx10-SP Tip 113 ps (typical)	Dx20-SI and Dx20-PT Tips 56 ps (typical) Dx20-HiTemp 67.5 ps (typical) Dx20-QC Tip 92 ps (typical) Dx20-SP Tip 113 ps (typical)	Dx10-SI, Dx10-HiTemp, and Dx10-PT Tips 84 ps (typical) Dx10-QC Tip 92 ps (typical) Dx10-SP Tip 113 ps (typical)	Dx20-SI, Dx20-HiTemp, and Dx20-PT Tips 84 ps (typical) Dx20-QC Tip 92 ps (typical) Dx20-SP Tip 113 ps (typical)	56 ps (typical)	112 ps (typical)
Noise (System)	<36 nV/√Hz (2.8 mVrms) (typical) Referred to input, 6 GHz bandwidth	<61 nV/√Hz (4.8 mVrms) (typical) Referred to input, 6 GHz bandwidth	<36 nV/√Hz (2.3 mVrms) (typical) Referred to input, 4 GHz bandwidth	<67 nV/√Hz (4.3 mVrms) (typical) Referred to input, 4 GHz bandwidth	<74 nV/√Hz (5.8 mVrms) (typical) Referred to input, 6 GHz bandwidth	<74 nV/√Hz (4.1 mVrms) (typical) Referred to input, 3 GHz bandwidth
Input						
Input Dynamic Range (Nominal)	2.5Vpk-pk, ±1.25V	5Vpk-pk, ±2.5V	2.5Vpk-pk, ±1.25V	5Vpk-pk, ±2.5V	4.8Vpk-pk, ±2.4V	
Input Common Mode Voltage Range (Nominal)	±4 V				±2.4 Vmax	
Input Offset Voltage Range	±3 V Differential (nominal)				n/a	
Non-destructive Input Range (Nominal)	±20 V				±18 V	
Attenuation	1.7X / 1.0X (nominal)	3.2X / 1.9X (nominal)	1.7X / 1.0X (nominal)	3.2X / 1.9X (nominal)	2.5X	
DC Input Resistance (Nominal)	100 kΩ Differential 50 kΩ Common Mode				4 kΩ Differential 2 kΩ Common Mode	
Impedance (Zmin, typical)	Dx10-SI Lead, Dx10-HiTemp >175 Ω Differential† Dx10-PT Tip >175 Ω Differential† Dx10-QC Tip >125 Ω Differential† Dx10-SP Tip >40 Ω Differential†	Dx20-SI Lead, Dx20-HiTemp >250 Ω Differential† Dx20-PT Tip >175 Ω Differential† Dx20-QC Tip >125 Ω Differential† Dx20-SP Tip >40 Ω Differential†	Dx10-SI Lead, Dx10-HiTemp >200 Ω Differential† Dx10-PT Tip >175 Ω Differential† Dx10-QC Tip >100 Ω Differential† Dx10-SP Tip >40 Ω Differential†	Dx20-SI Lead, Dx20-HiTemp >350 Ω Differential† Dx20-PT Tip >175 Ω Differential† Dx20-QC Tip >100 Ω Differential† Dx20-SP Tip >40 Ω Differential†	>200 Ω Differential	>650 Ω Differential through entire frequency range

* All Bandwidth and Rise Time measurements are made with an oscilloscope bandwidth greater or equal to the probe bandwidth

† Through entire frequency range

Product Description	Product Code	Product Description	Product Code
Complete Probe Systems		Amplifier and Probe Tip Modules (cont'd)	
4 GHz Complete Probe System with Dx10-SI Solder-In Tip (Qty. 1), Dx10-SP Square Pin (Qty. 1), Dx10-QC Quick Connect (Qty. 1), and Dx10-PT-KIT Positioner Tip Browser (Qty. 1)	D410-PS	WaveLink D300A-AT 3 GHz/4.8Vp-p Differential Amplifier Module with Adjustable Tip	D300A-AT
4 GHz Complete Probe System with Dx20-SI Solder-In Tip (Qty. 1), Dx20-SP Square Pin (Qty. 1), Dx20-QC Quick Connect (Qty. 1), and Dx20-PT-KIT Positioner Tip Browser (Qty. 1)	D420-PS	WaveLink D600A-AT 6 GHz/4.8Vp-p Differential Amplifier Module with Adjustable Tip	D600A-AT
6 GHz Complete Probe System with Dx10-SI Solder-In Tip (Qty. 1), Dx10-SP Square Pin (Qty. 1), Dx10-QC Quick Connect (Qty. 1), and Dx10-PT-KIT Positioner Tip Browser (Qty. 1)	D610-PS	Positioner Tip (Browser) Kits	
6 GHz Complete Probe System with Dx20-SI Solder-In Tip (Qty. 1), Dx20-SP Square Pin (Qty. 1), Dx20-QC Quick Connect (Qty. 1), and Dx20-PT-KIT Positioner Tip Browser (Qty. 1)	D620-PS	WaveLink Dx10-PT Adjustable Positioner Tip Kit. For use with Dx10 amplifiers.	Dx10-PT-KIT
		WaveLink Dx20-PT Adjustable Positioner Tip Kit. For use with Dx20 amplifiers.	Dx20-PT-KIT
Amplifier and Probe Tip Modules		Probe Platform/Cable Assemblies and Adapters	
WaveLink D410 4 GHz/2.5Vp-p Differential Probe Amplifier with Dx10-SI Solder-In Tip (Qty. 1), Dx10-SP Square Pin (Qty. 1), and Dx10-QC Quick Connect (Qty. 1)	D410	WaveLink ProLink Platform/Cable Assembly Kit with complete soft carrying case for all probe items.	WL-PLINK-CASE
WaveLink D420 4 GHz/5Vp-p Differential Probe Amplifier with Dx20-SI Solder-In Tip (Qty. 1), Dx20-SP Square Pin (Qty. 1), and Dx20-QC Quick Connect (Qty. 1)	D420	WaveLink ProBus Platform/Cable Assembly Kit with complete soft carrying case for all probe items.	WL-PBUS-CASE
WaveLink D610 6 GHz/2.5Vp-p Differential Probe Amplifier with Dx10-SI Solder-In Tip (Qty. 1), Dx10-SP Square Pin (Qty. 1), and Dx10-QC Quick Connect (Qty. 1)	D610	Hi-Temp Leads	
WaveLink D620 6 GHz/5Vp-p Differential Probe Amplifier with Dx20-SI Solder-In Tip (Qty. 1), Dx20-SP Square Pin (Qty. 1), Dx20-QC Quick Connect (Qty. 1)	D620	WaveLink Temperature Extension Cables for Dx10. Includes set of Matched 30" High Temperature Cables (Qty. 1) and solder-in lead set (Qty. 1)	Dx10-HiTemp
		WaveLink Temperature Extension Cables for Dx20. Includes set of Matched 30" High Temperature Cables (Qty. 1) and solder-in lead set (Qty. 1)	Dx20-HiTemp

WAVELINK MEDIUM BANDWIDTH DIFFERENTIAL PROBES



Teledyne LeCroy WaveLink
Medium Bandwidth Differential
Probe and Accessory
Model Numbers:

D830

D830-PS

D1030

D1030-PS

D1330

D1330-PS

WL-PLINK-CASE

Dxx30-PT-KIT


Dxx30-SMA-SMP-LEADS

General Purpose Probe with Range of Capabilities

Teledyne LeCroy's WaveLink 8-13 GHz Differential Probes are a medium bandwidth, general purpose probing solution with high input dynamic range and offset range capability. These probes support solder-in, positioner (browser), square pin and SMA/SMP cabled tip/lead connections. The range of capabilities is ideal for a variety of high speed DDR signals where high dynamic range and large offset requirements are common.

Features and Benefits

- Choice of 8, 10, or 13 GHz bandwidth models
- 3.5 Vpk-pk dynamic range
- ± 4 V offset range
- Ideal for DDR3, DDR4, LPDDR3
- Deluxe soft carrying case
- Wide variety of tips and leads
 - Solder-In Lead
 - Positioner (Browser) Tip
 - SMA/SMP Lead
 - Square Pin Lead
- SMA/SMP lead set accessory does not require purchase of a different amplifier

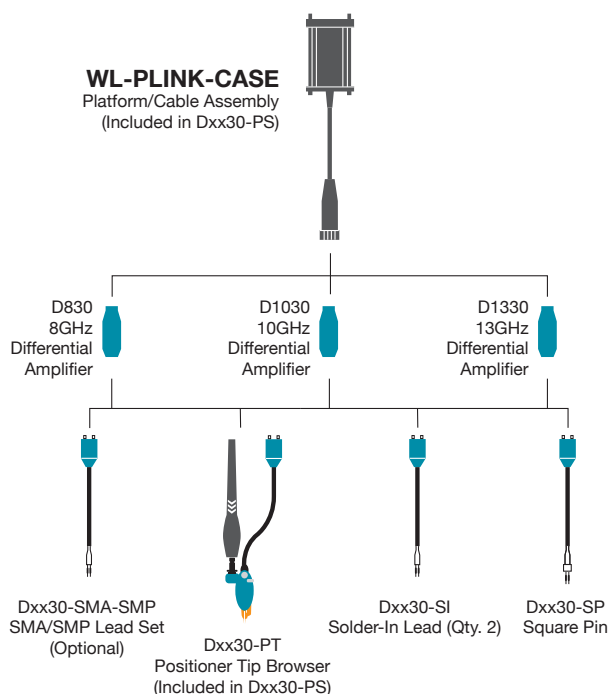

WAVELINK MEDIUM BANDWIDTH DIFFERENTIAL PROBES

	D830, D830-PS	D1030, D1030-PS	D1330, D1330-PS
Bandwidth	Dxx30-SI, Dxx30-SMA-SMP, and Dxx30-PT Tips 8 GHz (probe only, guaranteed) 8 GHz (system bandwidth, when used with 808Zi/Zi-A, typical) Dxx30-SP Tip 3 GHz (probe only, guaranteed) 3 GHz (system bandwidth, when used with 808Zi/Zi-A, typical)	Dxx30-SI, Dxx30-SMA-SMP, and Dxx30-PT Tips 10 GHz (probe only, guaranteed) 10 GHz (system bandwidth, when used with 813Zi/Zi-A, typical) Dxx30-SP Tip 3 GHz (probe only, guaranteed) 3 GHz (system bandwidth, when used with 813Zi/Zi-A, typical)	Dxx30-SI and Dxx30-SMA-SMP Tips 13 GHz (probe only, guaranteed) 13 GHz (system bandwidth, when used with 813Zi/Zi-A, typical) Dxx30-PT Tip 10 GHz (probe only, guaranteed) 10 GHz (system bandwidth, when used with 813Zi/Zi-A, typical) Dxx30-SP Tip 3 GHz (probe only, guaranteed) 3 GHz (system bandwidth, when used with 813Zi/Zi-A, typical)
Rise Time (10–90%)	Dxx30-SI, Dxx30-SMA-SMP, and Dxx30-PT Tips 50 ps (typical) System rise time measured with ≥8 GHz oscilloscope Dxx30-SP Tip 132 ps (typical) System rise time measured with ≥8 GHz oscilloscope	Dxx30-SI, Dxx30-SMA-SMP, and Dxx30-PT Tips 40 ps (typical) System rise time measured with ≥13 GHz oscilloscope Dxx30-SP Tip 132 ps (typical) System rise time measured with ≥13 GHz oscilloscope	Dxx30-SI and Dxx30-SMA-SMP Tips 35 ps (typical) System rise time measured with ≥13 GHz oscilloscope Dxx30-PT Tip 40 ps (typical) System rise time measured with ≥13 GHz oscilloscope Dxx30-SP Tip 132 ps (typical) System rise time measured with ≥13 GHz oscilloscope
Rise Time (20–80%)	Dxx30-SI, Dxx30-SMA-SMP, and Dxx30-PT Tips 37.5 ps (typical) System rise time measured with ≥8 GHz oscilloscope Dxx30-SP Tip 100 ps (typical) System rise time measured with ≥8 GHz oscilloscope	Dxx30-SI, Dxx30-SMA-SMP, and Dxx30-PT Tips 30 ps (typical) System rise time measured with ≥13 GHz oscilloscope Dxx30-SP Tip 100 ps (typical) System rise time measured with ≥13 GHz oscilloscope	Dxx30-SI and Dxx30-SMA-SMP Tips 26 ps (typical) System rise time measured with ≥13 GHz oscilloscope Dxx30-PT Tip 30 ps (typical) System rise time measured with ≥13 GHz oscilloscope Dxx30-SP Tip 100 ps (typical) System rise time measured with ≥13 GHz oscilloscope
Noise (Probe)	<48 nV/√Hz (4.3 mVrms) (typical) Referred to input, 8 GHz bandwidth.	<48 nV/√Hz (4.8 mVrms) (typical) Referred to input, 10 GHz bandwidth.	<48 nV/√Hz (5.5 mVrms) (typical) Referred to input, 13 GHz bandwidth.
Noise (System)	<52 nV/√Hz (4.6 mVrms) (typical) Referred to input, 8 GHz bandwidth.	<52 nV/√Hz (5.2 mVrms) (typical) Referred to input, 10 GHz bandwidth.	<52 nV/√Hz (5.9 mVrms) (typical) Referred to input, 13 GHz bandwidth.

Input	
Input Dynamic Range	3.5Vpk-pk, ±1.75V (nominal)
Input Common Mode Voltage Range	±5 V (nominal)
Input Offset Voltage Range	±4 V Differential (nominal)
Non-destructive Input Range	±15 V (nominal)
Attenuation	3.75x (nominal)
DC Input Resistance (nominal)	200 kΩ Differential 50 kΩ Common mode
Impedance (Zmin, typical)	>250 Ω Differential through entire frequency range using SI tip
Impedance (mid-band, typical)	Dxx30-SI Lead 470 Ω at 4 GHz, 320 Ω at 6 GHz, 260 Ω at 8 GHz, 250 Ω at 9 GHz, 260 Ω at 10 GHz, 350 Ω at 13 GHz Dxx30-PT Tip 155 Ω at 4 GHz, 210 Ω at 6 GHz, 140 Ω at 8 GHz, 80 Ω at 9 GHz, 40 Ω at 10 GHz

Product Description	Product Code	Product Description	Product Code
Complete Probe Systems		Positioner Tip (Browser) Kits	
8 GHz Complete Probe System with Dxx30-SI Solder-In Tip (Qty. 2), Dxx30-SP Square Pin (Qty. 1), and Dxx30-PT-KIT Positioner Tip Browser (Qty. 1)	D830-PS	WaveLink Dxx30-PT (up to 10 GHz rating) Adjustable Positioner Tip Kit. For use with Dxx30 amplifiers.	Dxx30-PT-KIT
10 GHz Complete Probe System with Dxx30-SI Solder-In Tip (Qty. 2), Dxx30-SP Square Pin (Qty. 1), and Dxx30-PT-KIT Positioner Tip Browser (Qty. 1)	D1030-PS	Probe Platform/Cable Assemblies and Adapters	
13 GHz Complete Probe System with Dxx30-SI Solder-In Tip (Qty. 2), Dxx30-SP Square Pin (Qty. 1), and Dxx30-PT-KIT Positioner Tip Browser (Qty. 1)	D1330-PS	WaveLink ProLink Platform/Cable Assembly Kit with complete soft carrying case for all probe items.	WL-PLINK-CASE
Amplifier and Probe Tip Modules		SMA/SMP Lead Set	
WaveLink D830 8 GHz/3.5V _{p-p} Differential Probe Amplifier with Dxx30-SI Solder-In Tip (Qty. 2) and Dxx30-SP Square Pin (Qty. 1)	D830	Lead set consisting of WaveLink Dxx30-SMA-SMP-LEADS for use with Dxx30 amplifiers.	Dxx30-SMA-SMP-LEADS
WaveLink D1030 10 GHz/3.5V _{p-p} Differential Probe Amplifier with Dxx30-SI Solder-In Tip (Qty. 2) and Dxx30-SP Square Pin (Qty. 1)	D1030	Accessories	
WaveLink D1330 13 GHz/3.5V _{p-p} Differential Probe Amplifier with Dxx30-SI Solder-In Tip (Qty. 2) and Dxx30-SP Square Pin (Qty. 1)	D1330	Cascade Microtech EZ-Probe Positioner	EZ PROBE
		Probe Deskew and Calibration Test Fixture	TF-DSQ
		Calibration Options	
		NIST Calibration for D830. Includes test data.	D830-CCNIST
		NIST Calibration for D1030. Includes test data.	D1030-CCNIST
		NIST Calibration for D1330. Includes test data.	D1330-CCNIST

WAVELINK HIGH BANDWIDTH DIFFERENTIAL PROBES



Teledyne LeCroy
WaveLink High Bandwidth
Differential Probe
and Accessory
Model Numbers:


D1305-A
D1305-A-PS
D1605-A
D1605-A-PS
D2005-A
D2005-A-PS
D2505-A
D2505-A-PS
WL-PLINK-A-CASE
WL-2.92MM-CASE
LPA-2.92

Ultra-wideband Architecture for Superior Signal Fidelity

Teledyne LeCroy's WaveLink® high bandwidth differential probes utilize advanced differential traveling wave (distributed) amplifier architecture to achieve superior high frequency true analog broadband performance. Traveling wave (distributed) amplifiers are commonly used in ultra high frequency broadband amplifiers. This multi-stage amplifier architecture maximizes gain per stage and minimizes probe attenuation, which provides very low probe noise and fast rise times.

Features & Benefits

- Up to 25 GHz bandwidth (probe + oscilloscope)
- System rise time as fast as 13 ps (20–80%)
- Highest bandwidth Solder-In solution (25 GHz)
- Ultra-compact browsertip (22 GHz)
- Superior probe impedance minimizes AC loading on device under test (DUT)
- Carbon-composite browser tips optimize signal fidelity and loading
- Probe noise as low as 14 nV/ $\sqrt{\text{Hz}}$ (1.6 Vrms)
- Low probe attenuation
- Large operating voltage range
 - ± 4 V common mode range
 - ± 2.5 V offset range
 - 2.0 V_{pk-pk} dynamic range
- Long length Solder-In tip with field replaceable resistors

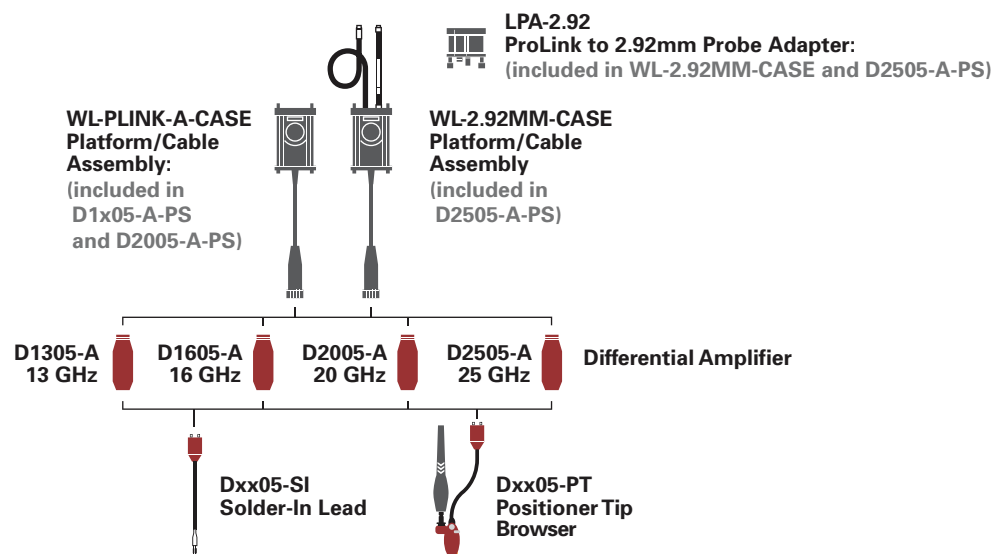

WAVELINK HIGH BANDWIDTH DIFFERENTIAL PROBES

	D1305-A, D1305-A-PS	D1605-A, D1605-A-PS	D2005-A, D2005-A-PS	D2505-A, D2505-A-PS
Bandwidth	Dxx05-SI and Dxx05-PT Tips 13 GHz (probe only, guaranteed) 13 GHz (system bandwidth, when used with 813ZI, typical)	Dxx05-SI and Dxx05-PT Tips 16 GHz (probe only, guaranteed) 16 GHz (system bandwidth, when used with 816ZI, typical)	Dxx05-SI and Dxx05-PT Tips 20 GHz (probe only, guaranteed) 20 GHz (system bandwidth, when used with 820ZI, typical)	Dxx05-SI Lead 25 GHz (probe only, guaranteed) 25 GHz (system bandwidth, when used with 825ZI, typical) Dxx05-PT Tip 22 GHz (system bandwidth, when used with 825ZI, typical) 20 GHz (probe only, guaranteed)
Rise Time (10–90%)	Dxx05-SI and Dxx05-PT Tips 32.5 ps (typical) System rise time measured with ≥ 13 GHz oscilloscope	Dxx05-SI and Dxx05-PT Tips 28 ps (typical) System rise time, measured with ≥ 16 GHz oscilloscope	Dxx05-SI and Dxx05-PT Tips 20 ps (typical) System rise time measured with ≥ 20 GHz oscilloscope	Dxx05-SI Lead 17.5 ps (typical) System rise time measured with ≥ 25 GHz oscilloscope Dxx05-PT Tip 19 ps (typical) System rise time measured with ≥ 25 GHz oscilloscope
Rise Time (20–80%)	Dxx05-SI and Dxx05-PT Tips 24.5 ps (typical) System rise time measured with ≥ 13 GHz oscilloscope	Dxx05-SI and Dxx05-PT Tips 21 ps (typical) System rise time measured with ≥ 16 GHz oscilloscope	Dxx05-SI and Dxx05-PT Tips 15 ps (typical) System rise time measured with ≥ 20 GHz oscilloscope	Dxx05-SI Lead 13 ps (typical) System rise time measured with ≥ 25 GHz oscilloscope Dxx05-PT Tip 14 ps (typical) System rise time measured with ≥ 25 GHz oscilloscope
Noise (Probe)	$< 14 \text{ nV}/\sqrt{\text{Hz}}$ (1.6 mV_{rms}) (typical) Referred to input, 13 GHz bandwidth	$< 14 \text{ nV}/\sqrt{\text{Hz}}$ (1.8 mV_{rms}) (typical) Referred to input, 16 GHz bandwidth	$< 18 \text{ nV}/\sqrt{\text{Hz}}$ (2.5 mV_{rms}) (typical) Referred to input, 20 GHz bandwidth	$< 18 \text{ nV}/\sqrt{\text{Hz}}$ (2.8 mV_{rms}) (typical) Referred to input, 25 GHz bandwidth
Noise (System)	$< 23 \text{ nV}/\sqrt{\text{Hz}}$ (2.7 mV_{rms}) (typical) Referred to input, 13 GHz bandwidth	$< 23 \text{ nV}/\sqrt{\text{Hz}}$ (2.9 mV_{rms}) (typical) Referred to input, 16 GHz bandwidth	$< 28 \text{ nV}/\sqrt{\text{Hz}}$ (4.0 mV_{rms}) (typical) Referred to input, 20 GHz bandwidth	$< 28 \text{ nV}/\sqrt{\text{Hz}}$ (4.5 mV_{rms}) (typical) Referred to input, 25 GHz bandwidth

Input

Input Dynamic Range	2.0 $V_{\text{pk-pk}}$, ($\pm 1.0 \text{ V}$) (nominal)
Input Common Mode Voltage Range	$\pm 4 \text{ V}$ (nominal)
Input Offset Voltage Range	$\pm 2.5 \text{ V}$ Differential (nominal)
Non-destructive Input Range	$\pm 10 \text{ V}$ (nominal)
Attenuation	3.5x (nominal) 4.5x (nominal)
DC Input Resistance (nominal)	1.1 $\text{k}\Omega$ Differential 100 $\text{k}\Omega$ Common mode

Product Description

Complete Probe Systems

13 GHz Complete Probe System with Solder-In Tip (13 GHz) and Positioner Tip Browser (13 GHz)	D1305-A-PS
16 GHz Complete Probe System with Solder-In Tip (16 GHz) and Positioner Tip Browser (16 GHz)	D1605-A-PS
20 GHz Complete Probe System with Solder-In Tip (20 GHz) and Positioner Tip Browser (20 GHz)	D2005-A-PS
25 GHz Complete Probe System with Solder-In Tip (25 GHz) and Positioner Tip Browser (22 GHz)	D2505-A-PS

Amplifier and Probe Tip Modules

WaveLink D1305 13 GHz/1.6 $V_{\text{pk-pk}}$ Differential Probe Amplifier with Dxx05-SI Solder-In Tip (Qty. 2)	D1305-A
WaveLink D1605 16 GHz/1.6 $V_{\text{pk-pk}}$ Differential Probe Amplifier with Dxx05-SI Solder-In Tip (Qty. 2)	D1605-A
WaveLink D2005 20 GHz/1.6 $V_{\text{pk-pk}}$ Differential Probe Amplifier with Dxx05-SI Solder-In Tip (Qty. 2)	D2005-A
WaveLink D2505 25 GHz/1.6 $V_{\text{pk-p}}$ Differential Probe Amplifier with Dxx05-SI Solder-In Tip (Qty. 2)	D2505-A

Positioner Tip (Browser) Kits

WaveLink Dxx05-PT (Up to 22 GHz Rating) Adjustable Positioner Tip Kit. For use with Dxx05 Amplifiers	Dxx05-PT-KIT
--	--------------

Probe Platform/Cable Assemblies and Adapters

WaveLink ProLink Platform/Cable Assembly Kit for ≥ 13 GHz WaveLink Probes	WL-PLINK-A-CASE
WaveLink 2.92 mm Platform/Cable Assembly Kit for ≥ 20 GHz WaveLink Probes	WL-2.92MM-CASE
ProLink to 2.92 mm Adapter with Probe Power and Communication Pass Through	LPA-2.92

Product Description

Accessories

Cascade Microtech EZ-Probe Positioner	EZ PROBE
Probe Deskew and Calibration Test Fixture	TF-DSQ

Calibration Options

NIST Calibration for D1305. Includes Test Data	D1305-A-CCNIST
NIST Calibration for D1605. Includes Test Data	D1605-A-CCNIST
NIST Calibration for D2005. Includes Test Data	D2005-A-CCNIST
NIST Calibration for D2505. Includes Test Data	D2505-A-CCNIST

Replacement Parts

Replacement Dxx05-SI 13–25 GHz Solder-In Lead with Qty. 5 Spare Resistors	Dxx05-SI
Replacement SI Resistor Kit for Dxx05-SI Solder-In Tip	Dxx05-SI-RESISTORS
Replacement Dxx05-PT Positioner Tip	Dxx05-PT
Qty. 4 Replacement Carbon Composite Pogo-pin Tips	Dxx05-PT-TIPS
Replacement Probe Tip Holder Kit	PK600ST-3
Replacement Platform/Cable Assembly Mounting Kit	PK600ST-4
Qty. 1 Package of Black Adhesive Pads (10/pkg.) and Qty. 1 Package of White Adhesive Pads (10/pkg.)	Dxx0-PT-TAPE
Qty. 1 Package of Adhesive Probe Connection Guides (200 individual guides/package)	Dxx05-PT-GUIDES

DIFFERENTIAL PROBES

Teledyne LeCroy
Differential Probes
Model Numbers:

AP033

AP034



AP033



AP034

AP033 and AP034

High bandwidth, excellent common-mode rejection ratio (CMRR) and low noise make these active differential probes ideal for applications such as disk drive design and failure analysis, as well as wireless and data communication design. With the ProBus interface, the AP034 and AP033 become an integral part of the oscilloscope, allowing sensitivity, offset and common-mode range to be displayed on the scope screen. Common mode sensing and input protection capabilities of the AP033 add additional functionality.

Features for both probes:

- 500 MHz bandwidth (AP033)
- 1 GHz bandwidth (AP034)
- x10 gain to ÷ 10 attenuation range (AP033)
- 10,000:1 DC CMRR
- Low 9 nV/ $\sqrt{\text{Hz}}$ noise (AP033)
- 1.5 pF/side input C (AP034)
- 200 $\mu\text{V}/\text{div}$ (AP033)
- Input ESD protection
- Autozero feature

DIFFERENTIAL PROBES

Specifications

	AP034	AP033
Bandwidth	1 GHz	500 MHz
Gain	x1 ($\div 10$ and $\div 20$ with plug-on attenuators)	x10, x1, $\div 10$ ($\div 100$ with plug-on $\div 10$ attenuator)
DC Accuracy	2% typical (probe only)	1% in x1 without external attenuator
Input Resistance	1 M Ω 1.5 pF each input to ground 2 M Ω 0.85 pF between inputs	1 M Ω each input to ground 2 M Ω differential between inputs
Differential Mode Range	± 400 mV (x1) ± 4 V ($\div 10$) ± 8 V ($\div 20$)	± 400 mV (x1) ± 40 mV (x10) ± 4 V ($\div 10$) ± 40 V ($\div 100$)
Offset Range	± 1.6 V (x1) ± 16 V (± 10) ± 32 V (± 20)	± 400 mV (x1, x10) ± 4 V (± 10) ± 40 V (± 100)
Common-Mode Range	± 16 V (x1) ± 42 V (± 10) $+42$ V (± 20)	± 42 V peak (± 10) $+4.2$ V peak (± 100)
CMRR	70 Hz 10,000:1 (80 dB) 1 MHz 100:1 (40 dB) 100 MHz 18.1 (25 dB) 500 MHz 9:1 (19 dB)	70 Hz 10,000:1 (80 dB) 100 kHz 10,000:1 (80 dB) 1 MHz 1000:1 (60 dB) 10 MHz 100:1 (40 dB) 250 MHz 5:1 (14 dB)

Ordering Information

Product Description	Product Code
500 MHz Differential Probe	AP033
1 GHz Differential Probe	AP034

HIGH VOLTAGE DIFFERENTIAL PROBES



HIGH VOLTAGE DIFFERENTIAL PROBES

Differential active probes are like two probes in one. Instead of measuring a test point in relation to a ground point (like single-ended active probes), differential probes measure the difference in voltage of a test point in relation to another test point.

Teledyne LeCroy
High Voltage
Differential Probe
Model Numbers:

AP031
ADP300
ADP305

*Opposite page:
ADP305 High Voltage Differential Probe*

HIGH VOLTAGE DIFFERENTIAL PROBES



Teledyne LeCroy
High Voltage
Differential Probes
Model Numbers:

AP031
ADP300
ADP305

The AP031 is a low cost, battery operated active differential probe intended for measuring higher voltages. The differential techniques employed permit measurements to be taken at two points in a circuit without reference to the ground, allowing the oscilloscope to be safely grounded without the use of opto-isolators or isolating transformers.

Features

- Safe floating measurements
- 15 MHz bandwidth
- 700 V maximum input voltage
- Works with any 1 M Ω input oscilloscope

AP031 Specifications

Attenuation	$\div 10 / \div 100$
Bandwidth	15 MHz
Input R	4 M Ω
Differential Mode Range	$\pm 70 \text{ V} / \pm 700 \text{ V DC} + \text{Peak AC}$
Common Mode Range	$\pm 700 \text{ V DC} + \text{Peak AC}$
CMRR	86 dB @ 50 Hz 56 dB @ 200 kHz

Power Requirements: four AA batteries

HIGH VOLTAGE DIFFERENTIAL PROBES

ADP30X high-voltage active probes are safe, easy-to-use, and ideally suited for measuring power electronics. The ADP300 is designed for troubleshooting low-frequency power devices and other circuits where the reference potential is elevated from the ground or the location of the ground is unknown. The ADP305 is designed for measuring the high-speed floating voltages found in today's power electronics.

Features

- 20 MHz and 100 MHz bandwidth
- 1,000 V rms common mode voltage
- 1,400 V peak differential voltage
- EN 61010 CAT III
- 80 dB CMRR at 50/60 Hz
- ProBus system
- Full remote control

ADP30X Specifications

Electrical Characteristics

Bandwidth	20 MHz (ADP300)
	100 MHz (ADP305)
Differential Voltage	1,400 V peak
Common Mode Voltage	1,000 V rms CAT III
Low-Frequency Accuracy (probe only)	1% of Reading
CMRR	50/60 Hz 80 dB (10,000:1)
	100 kHz 50 dB (300:1)
Max. Slew Rate (referenced to input)	60,000 V/ μ s (ADP300)
	300,000 V/ μ s (ADP305)
AC Noise (referenced to input)	50 mV rms
Attenuation	$\div 100/\div 1000$ (automatically selected by scope)
Input Impedance	Between inputs 8 M Ω , 6 pF
	Each input to ground 4 M Ω , 1 pF
Sensitivity	1 V/div to 350 V/div (ADP300)
	200 mV/div to 350 V/div (ADP305)
Interface	ProBus, 1 M Ω *

General Characteristics

Overall Length	2 m
Input Connectors	4 mm Shrouded Banana Plug
Operating Temperature	0 °C to 50 °C
Warranty	1 year

*Requires AP-1M for oscilloscopes with 50 Ω only inputs


Ordering Information

Product Description

700 V, 15 MHz Differential Probe ($\div 10$, $\div 100$)	AP031
1,400 V, 100 MHz High-Voltage Differential Probe	AP305
1,400 V, 20 MHz High-Voltage Differential Probe	AP300



DIFFERENTIAL AMPLIFIERS

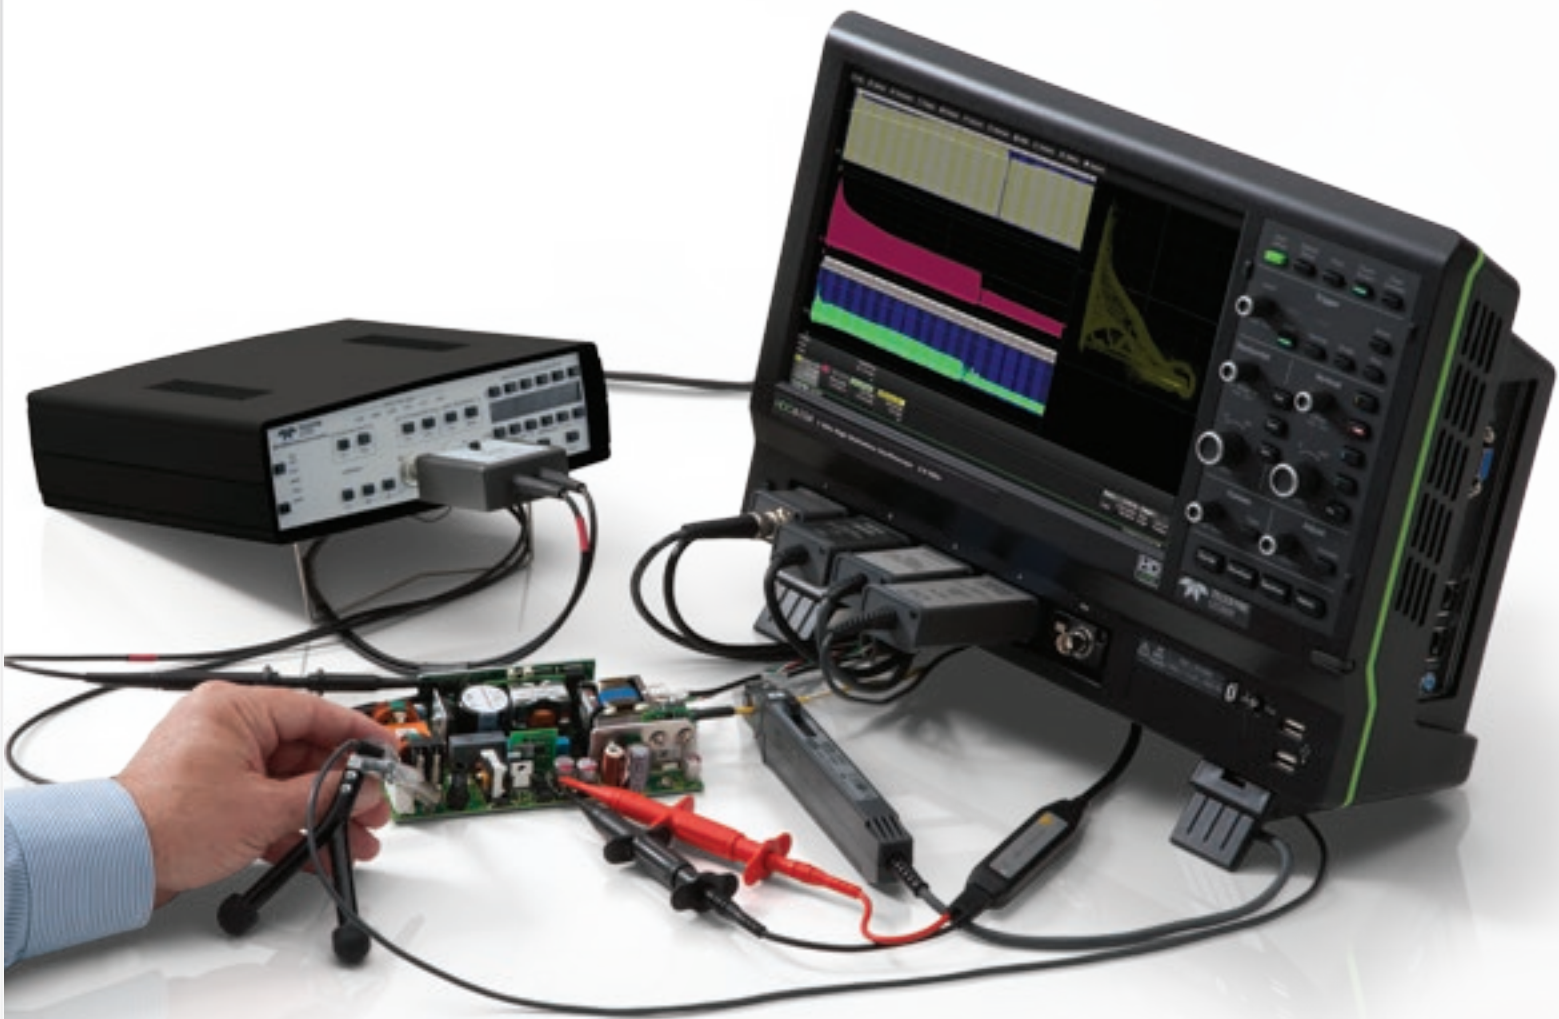

DIFFERENTIAL AMPLIFIERS

Differential amplifiers are intended to act as signal conditioning preamplifiers for oscilloscopes and network and spectrum analyzers, providing differential measurement capability to instruments having only a single-ended input. The "-PR2" version of each amplifier is a dual channel unit. The DXC series differential input cables are matched to the characteristics of the amplifier.

Teledyne LeCroy
Differential Amplifier
and Accessory
Model Numbers:

DA1855A
DA1855-PR2
DA1855A-PR2-RM
DA1855A-RM
DSC5100
DXC100A
DXC200
DA101

*Opposite page:
DA1855A Differential Amplifier working with the
HDO6000 oscilloscope for power measurement.*

DIFFERENTIAL AMPLIFIERS

Teledyne LeCroy
Differential Amplifier
and Accessory
Model Numbers:

DA1855A

DA1855-PR2

DA1855A-PR2-RM

DA1855A-RM

DSC5100

DXC100A

DXC200

DA101



DXC-5100

$\div 100$, 2.5KV Passive High Voltage
Probe Pair. Requires DA101 for full
performance



DXC100A

$\div 100$ or $\div 10$ Selectable, 250 MHz
Passive Differential Probe Pair

- DC to 100 MHz Bandwidth with DA1855A DC to 10 MHz Bandwidth with DA1822
- Max Input Voltage 500 V
- Selectable 10 or 100 Attenuation Factor
- 1.2 Meter Cable Length



DXC200

$\div 1$, 50 MHz, Passive Differential
Probe Pair

- DC to 50 MHz with DA1855A DC to 10MHz with DA1822A
- Max Input Voltage 500 V (Limited to Amplifier Max Input Voltage)
- x1 Differential Probe Pair
- 0.7 Meter Cable Length



DA101

$\div 10$, 1MOhm Passive
Attenuator for DXC series
probes

DIFFERENTIAL AMPLIFIERS



DA1855A

The DA1855A is a stand-alone, high-performance 100 MHz differential amplifier. It is intended to act as a signal conditioning preamplifier for oscilloscopes, digitizers and spectrum analyzers, providing differential measurement capability to instruments having only a single-ended input. When used with a DA1855A, oscilloscopes can obtain Common Mode Rejection Ratio (CMRR) and overdrive recovery performance levels previously unobtainable.

Amplifier gain can be set to 1 or 10. A built-in input attenuator can be separately set to attenuate signals by a factor of 10, providing gains of 10, 1, or 0.1 and common mode dynamic range of $\pm 15.5\text{ V}$ ($\div 1$) or $\pm 155\text{ V}$ ($\div 10$). Optional probes increase the maximum input signal and common mode ranges in proportion to their attenuation ratio but do not exceed their maximum input voltage rating.

Effective gain of the DA1855A, including probe attenuation, amplifier gain and attenuator settings, is automatically displayed.

DA1855A-PR2


2 Ch, 100 MHz Differential Amplifier with fast over drive recovery, calibrated offset, and selectable LP filters.

Ordering Information

Product Description	Product Code
1 Ch, 100 MHz Differential Amplifier with Precision Voltage Source	DA1855A
$\div 100$ or $\div 10$ Selectable, 250 MHz Passive Differential Probe Pair	DXC100A*
$\div 1$, 50 MHz Passive Differential Probe Pair	DXC200*
$\div 100$, 250 MHz 2.5kv, High Voltage Probe Pair (requires DA101 for full performance)	DXC-5100*
$\div 10$ 1 M Ω Passive Attenuator for DXC Series Probes	DA101*
2 Ch, 100 MHz Differential Amplifier with Precision Voltage Source	DA1855A-PR2
DA1855A with Rackmount	DA1855A-RM
DA1855A with Rackmount (must be ordered at time of purchase, no retrofit)	DA1855A-PR2-RM

**Must be used with DA Series Differential Amplifiers*

HIGH VOLTAGE PROBES

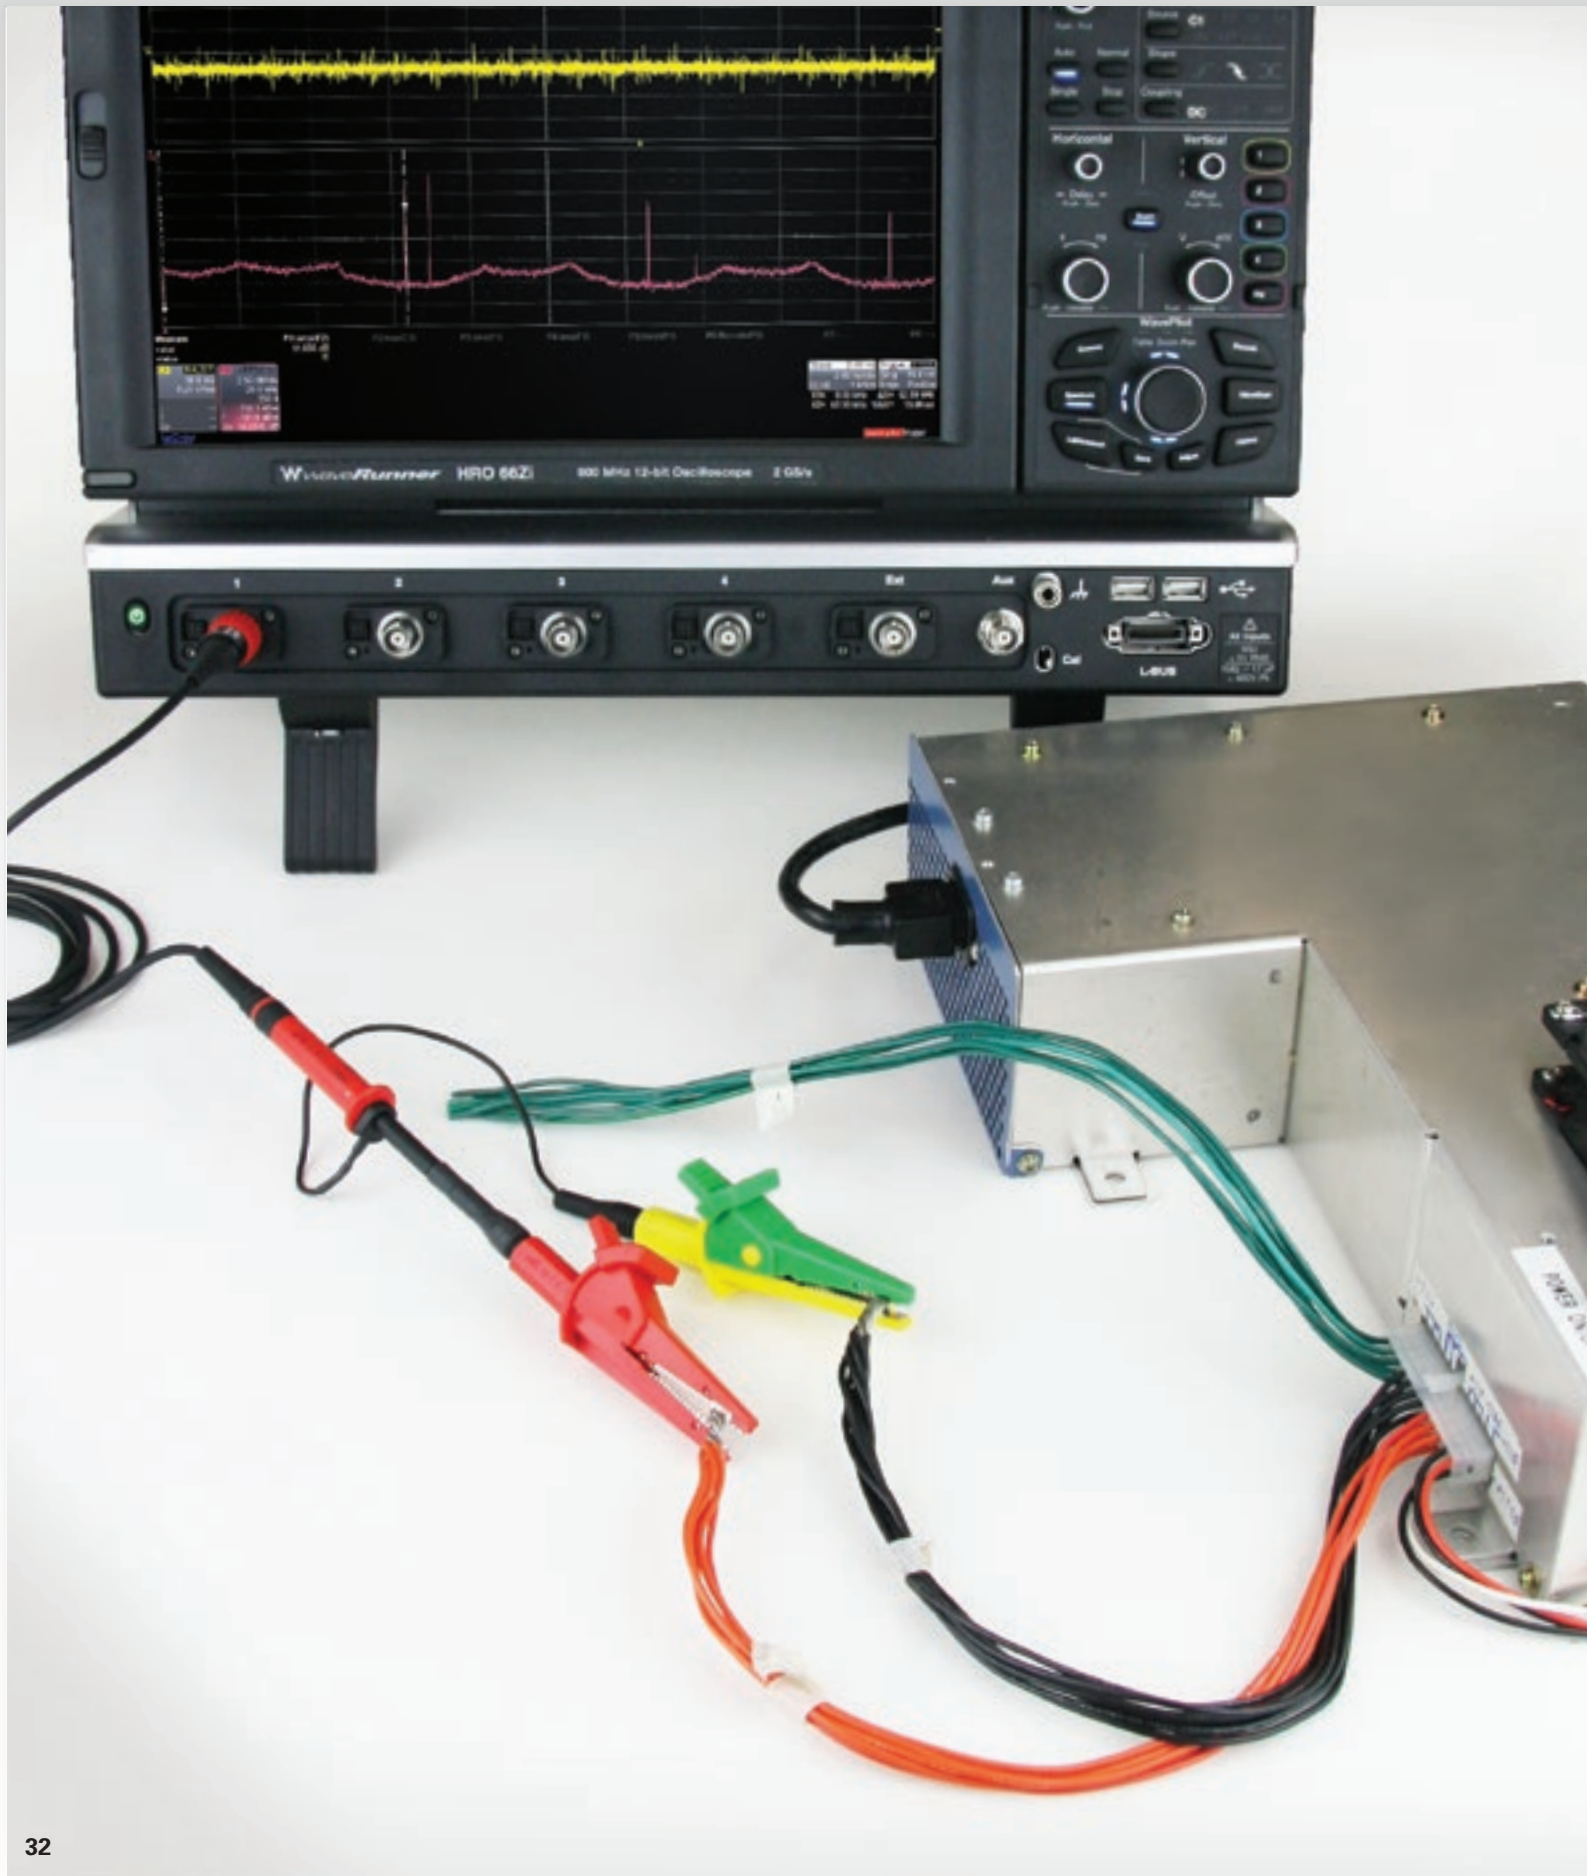

HIGH VOLTAGE PROBES

The PPE series of probes are suitable for a wide range of applications where high-voltage measurements must be made safely and accurately. There are five fixed-attenuation probes covering a range from 2 kV to 20 kV, and one switchable probe providing $\div 10/\div 100$ attenuation for voltage inputs up to 1.2 kV.

New technology which utilizes hybrid circuitry (and switch reading for probes with switchable gain/attenuation) minimizes ringing and overshoot to provide a precise response.

Teledyne LeCroy
High Voltage Probe
Model Numbers:

PPE1.2KV
PPE2KV
PPE4KV
PPE5KV
PPE6KV
PPE20KV

*Opposite page:
PPE Series High Voltage Probe*

HIGH VOLTAGE PROBES



Teledyne LeCroy
High Voltage Probe
Model Numbers:

- PPE1.2KV
- PPE2KV
- PPE4KV
- PPE5KV
- PPE6KV
- PPE20KV


The PPE series includes five fixed-attenuation probes covering a range from 2 kV to 20 kV, and one switchable probe providing $\div 10/\div 100$ attenuation for voltage inputs up to 1.2 kV. All fixed-attenuation, standard probes automatically rescale compatible Teledyne LeCroy oscilloscopes for the appropriate attenuation of the probe.

Features

- Safe, accurate high-voltage measurement
- 1.2 kV to 20 kV

High-Voltage Probes Selection Guide Specifications

Types	Bandwidth (MHz)	Input R (Ω)	Input C (pF)	Attenuation	Maximum Voltage	Probe Encoding	Cable
PPE1.2kV*	400	50 M	< 6	$\div 10 / \div 100$	600 V/1.2 kV	No	2 m
PPE2kV*	400	50 M	< 6	$\div 100$	2 kV	Yes	2 m
PPE4kV*	400	50 M	< 6	$\div 100$	4 kV	Yes	2 m
PPE5kV*	400	50 M	< 6	$\div 100$	5 kV	Yes	2 m
PPE6kV*	400	50 M	< 6	$\div 1000$	6 kV	Yes	2 m
PPE20kV [†]	100	50 M	< 2	$\div 1000$	20 kV (40 kV peak)	Yes	3 m

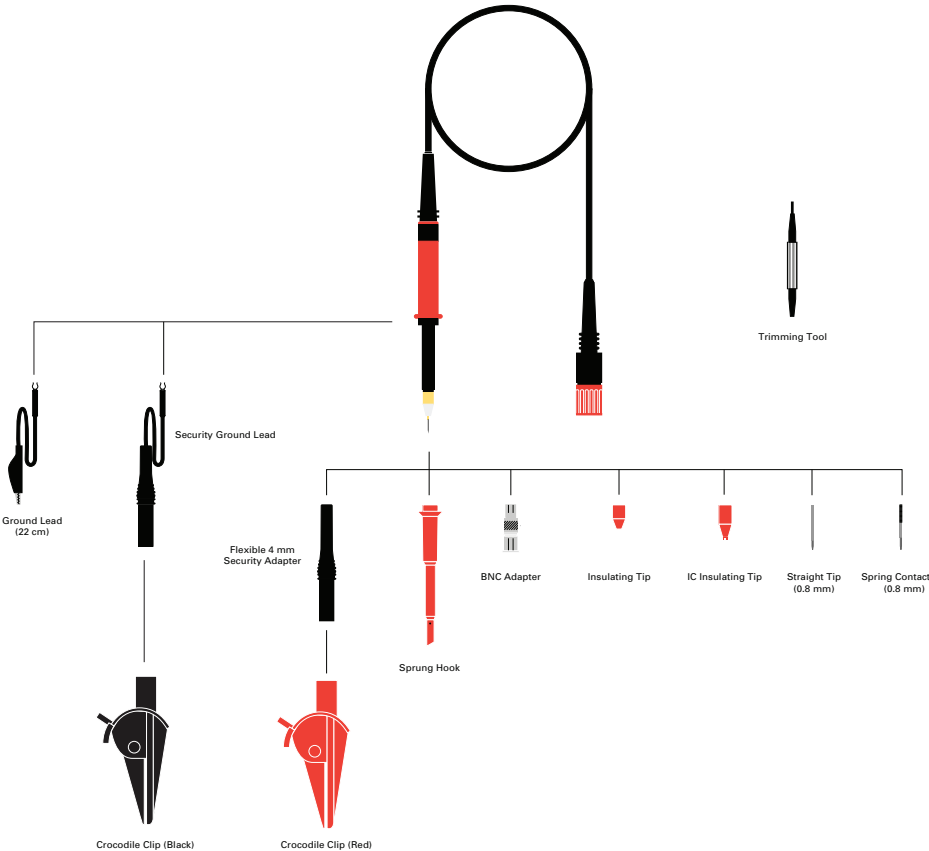

HIGH VOLTAGE PROBES

Ordering Information

Product Description	Product Code
÷10/÷100; 200/300 MHz; 5 M Ω /50 M Ω High-Voltage Probe 600 V/1.2 kV max. Voltage DC	PPE1.2KV
÷1000; 100 MHz; 50 M Ω High-Voltage Probe 20 kV (40 kV Peak) max. Voltage DC and Peak AC	PPE20KV
÷100; 400 MHz; 50 M Ω High-Voltage Probe	PPE2KV
2 kV max. Voltage DC and Peak AC	
÷100; 400 MHz; 50 M Ω High-Voltage Probe	PPE4KV
4 kV max. Voltage DC and Peak AC	
÷100; 400 MHz; 50 M Ω High-Voltage Probe	PPE5KV
5 kV max. Voltage DC and Peak AC	
÷1000; 400 MHz; 50 M Ω High-Voltage Probe	PPE6KV
6 kV max. Voltage DC and Peak AC	
Accessory Kit for PPE1.2kV, 2kV, 4kV, 5kV, and 6kV	PK103
Standard Probe Accessory Kit for PPE20kV	PK104
Ground Lead (15 cm)	PK104-1
Hook	PK104-2
Standard Probe Accessory Kit for PPE1.2kV, PPE2kV	PK103
Sprung Hook (red)	PK103-1
Ground Lead (22 cm)	PP005-G22
Crocodile Clip	PK30x-2
Probe Tip to BNC Adapter	PP005-BNC
IC Insulating Tip	
Screw Driver	
Probe Tip to Banana Plug Adapter	
Ground Lead with Banana Plug	
Spring Tip (0.8 mm)	PP005-ST8
Rigid Tip V2A	PP005-RT

Standard Accessory Kit for PPE20KV


Ground Lead (15 cm)	PK104-1
Hook	PK104-2

Supplied with probe:

*Probe Kit: Trimming tool, ground lead, rigid tip, IC insulator, BNC adapter, tip insulator, sprung hook, red crocodile clip.
4 mm safety ground lead, and green/yellow crocodile clip.

† Probe Kit: trimming tool, and ground lead with a crocodile clip.

OPTICAL PROBES

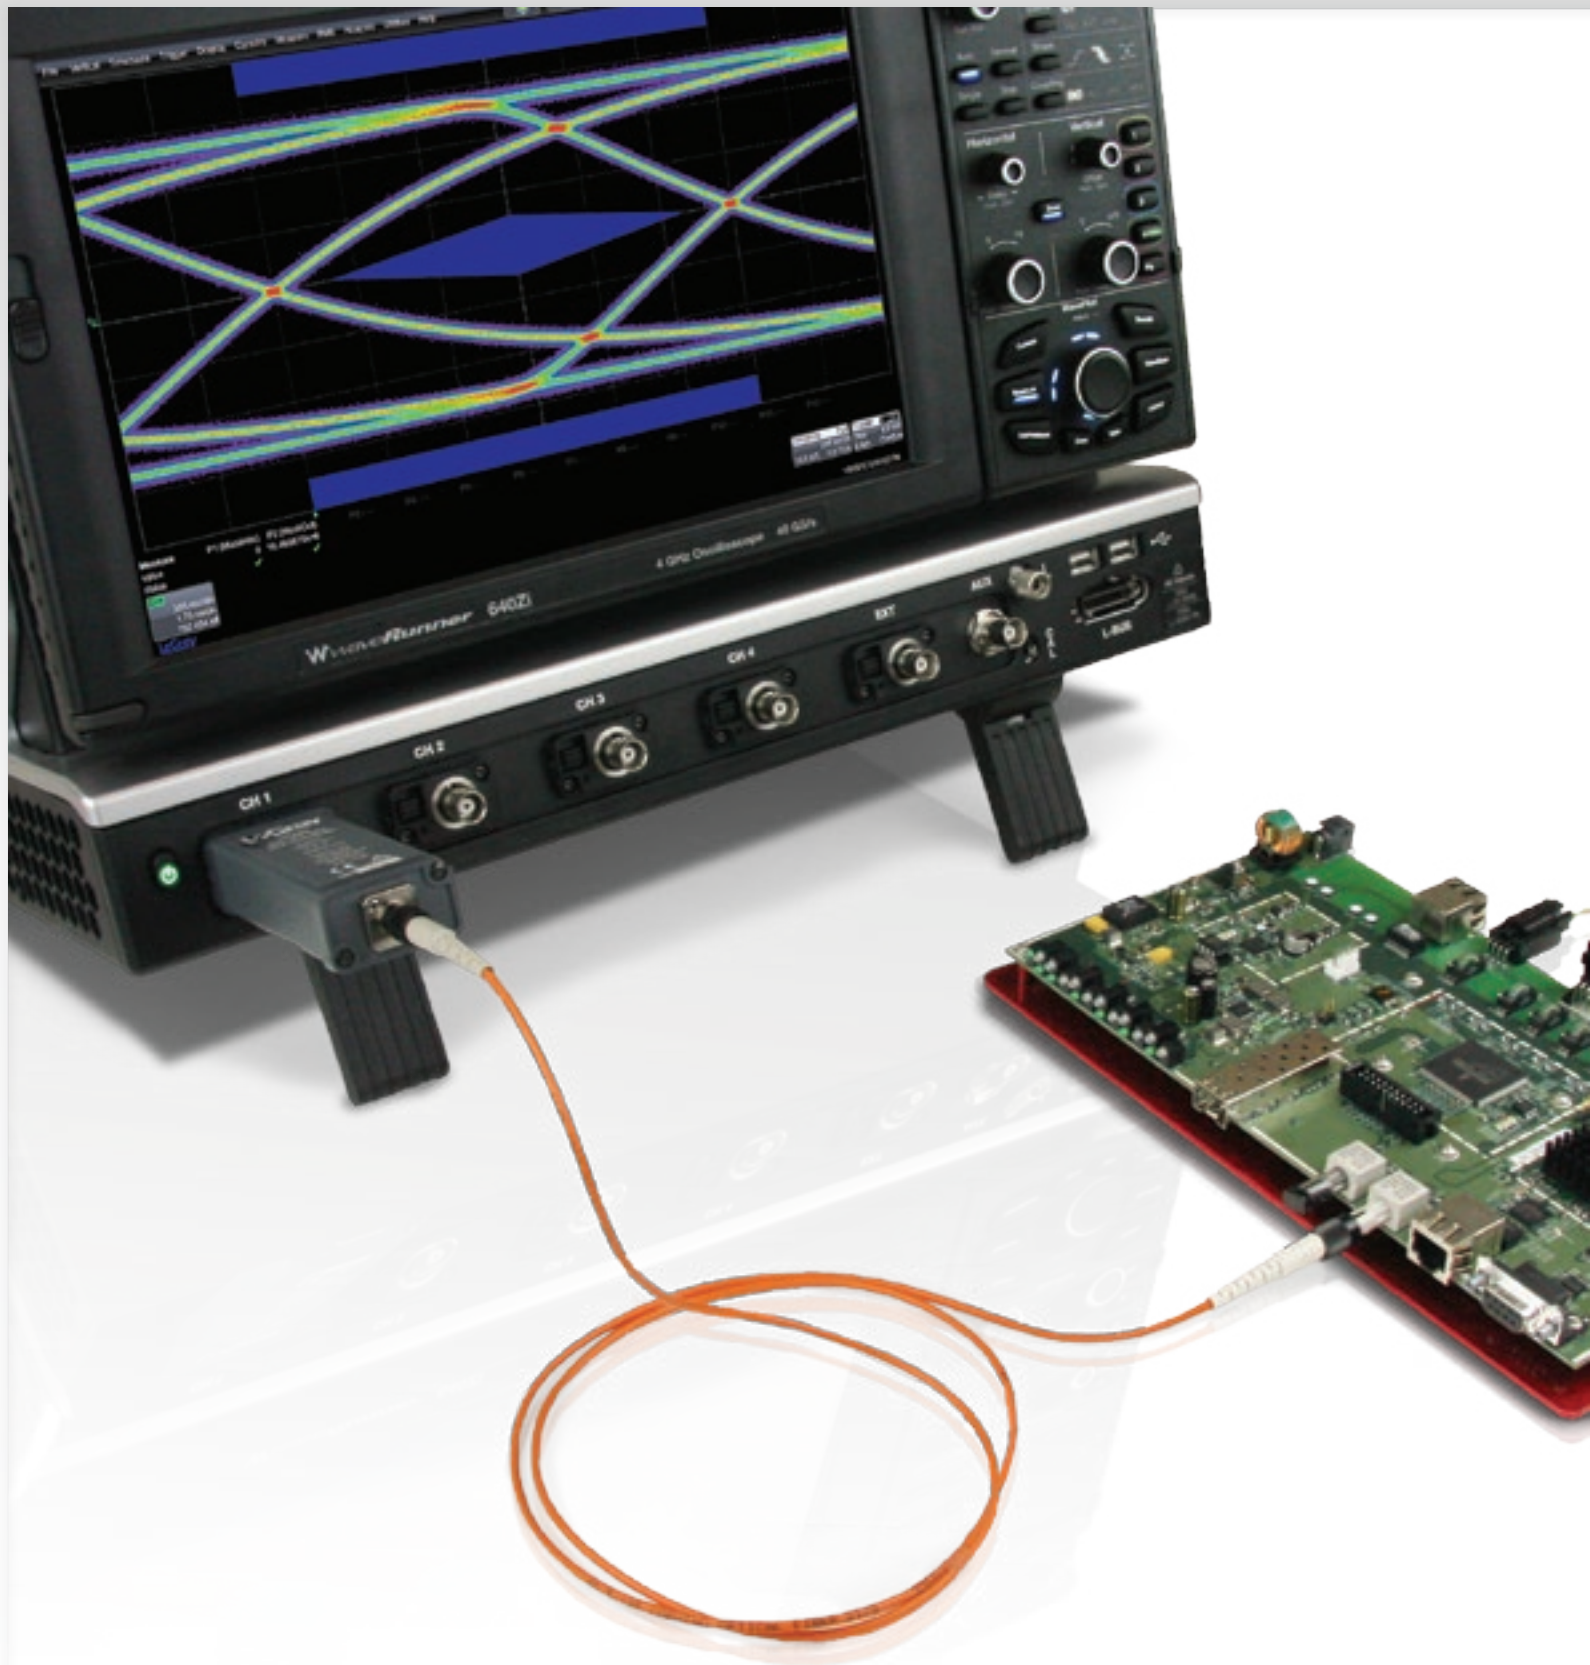

Teledyne LeCroy's wide-band multi-mode optical-to-electrical converters are designed for measuring optical communications signals. Their broad wavelength range and multi-mode input optics make these devices ideal for applications including Gigabit Ethernet, Fibre Channel, and ITU telecom standards.

The OE695G is compatible with WaveMaster 8 Zi/Zi-A, LabMaster 9 Zi-A, and LabMaster 10 Zi oscilloscopes. Connection to a real-time Teledyne LeCroy oscilloscope is through the 2.92mm interface, with a provided adapter to connect to ProLink interfaces.

The OE425 and OE455 are ProBus modules compatible with WaveRunner Xi/Xi-A, WaveRunner 6 Zi, WavePro 7 Zi/Zi-A oscilloscopes, as well as WaveMaster 8 Zi/Zi-A and LabMaster 9 Zi-A when used with an LPA-BNC adapter. The OE525 and OE555 are ProLink modules compatible with WavePro 7 Zi/Zi-A, WaveMaster 8 Zi/Zi-A, and LabMaster 9 Zi-A oscilloscopes.

Teledyne LeCroy
Optical Probe
Model Numbers:

OE695G

OE425

OE455

OE525

OE555

*Opposite page:
OE455 Optical Probe.*

OPTICAL PROBES



Teledyne LeCroy
Optical Probe
Model Numbers:

OE695G

OE425

OE455

OE525

OE555

OE695G

Teledyne LeCroy's OE695G wide-band optical-to-electrical converter is ideal for measuring optical datacom and telecom signals with data rates from 622 Mb/s to 12.5+ Gb/s. Connection to a real-time Teledyne LeCroy oscilloscope is through the 2.92mm interface, with a provided adapter to connect to ProLink interfaces.

Features

- Compatible with Teledyne LeCroy WaveMaster 8 Zi/Zi-A, LabMaster 9 Zi-A, and LabMaster 10 Zi oscilloscopes
- Frequency range DC to 9.5 GHz (electrical, -3 dB)
- Reference receiver support from 8GFC to 10GFC FEC, or Custom (<12.5Gb/s)
- Full bandwidth mode (no reference receiver applied)
- 62.5/125 μ m multi-mode or single-mode fiber input
- +7 dBm (5 mW) max peak optical power
- Low noise (as low as 25 pW/ $\sqrt{\text{Hz}}$)
- Ideal for Eye Mask, Extinction Ratio, and Optical Modulation Amplitude (OMA) testing

Specifications

Optical Wavelength Range	780 to 1550 nm (calibrated range) 750 to 1650 nm (usable range)
Maximum Modulation Bandwidth	DC to 8.625 GHz (-3 dBe, electrical) DC to 11.64 GHz (-3 dBo, optical) (Reference Receiver Applied) DC to 9.5 GHz (-3 dBe) DC to 12 GHz (-6 dBe) DC to 17 GHz (-14 dBe) (± 1 dBe passband variations typical, no Reference Receiver Applied)
Reference Receiver Uncertainty	± 1.6 dBe up to Fref = 0.75*bit rate ± 4 dBe 2*Fref setting (typical) ± 0.85 dBe up to Fref = 0.75*bit rate ± 4 dBe 2*Fref setting (on matched oscilloscope input channel 4 with 11, 17, 20, 30, 39, 50, 75, 90, or 100 mV/div gain ranges) with purchase of OE695G-REFCAL)
Reference Receiver Settings	8GFC, OC192/STM64, 10GBASE-W, 10GBASE-R, 10GFC, ITU-T G.975 FEC, ITU-T G.709 FEC, 10GbE FEC, 10GFC FEC, Custom (622 Mb/s to 12.5 Gb/s), None (Maximum Bandwidth)
Noise Equivalent Power	25 pW/ $\sqrt{\text{Hz}}$ @ 1310 nm (typical) 50 pW/ $\sqrt{\text{Hz}}$ @ 850 nm (typical) Average noise spectral density 0-10 GHz using most sensitive vertical scale
Rise Time (10-90%)	33 ps (typical, no reference receiver applied)
Connector Type	FC/PC, compatible with 62.5/125 μ m Multi-Mode fiber, or mechanically compatible Single-Mode fiber
Maximum Optical Linear Input (1 dB compression point)	-2 dBm (typical), -3 dBm (minimum) at 1550/1310 nm +4 dBm (typical), +3 dBm (minimum) at 850 nm
Maximum Optical Power	+7 dBm (5 mW) Peak

OE425/OE455/OE525/OE555

The O/E converters contain calibration data that can be used to create optical reference receivers for SONET/SDH (up to OC48/STM16), Fibre Channel, Gigabit Ethernet, and other optical standards. This feature is available when the O/E is used on a supported oscilloscope. The universal reference receiver supports any data rate up to 3 GHz and remains calibrated on any channel of the oscilloscope.

Features

- Frequency range to 5 GHz (6 GHz optical)
- 62.5 μm or narrower multi-mode or single-mode fiber input
- Broad wavelength range:
 - 500–870 nm (OE425, OE525)
 - 950–1630 nm (OE455, OE555)
- High responsivity
- Low noise
- Included Accessories:
 - Multi-mode optical fiber jumper FC-FC
 - FC to ST adapter
 - FC to SC adapter



Specifications

	OE425/OE525	OE455/OE555
Wavelength Range	500 – 870 nm 460 – 870 nm (0.1 V/mW)	950 – 1630 nm 800 – 1630 nm (0.1 V/mW)
Conversion Gain	0.5 V/mW	1.1 V/mW
Bandwidth	5 GHz (6 GHz optical)	3.5 GHz (4.5 GHz optical)
Equivalent Noise	2.2 μW rms	1.0 μW rms
Maximum Optical Power (at 5% saturation)	2.2 mW	1.0 mW
Rise Time	90 ps	108 ps
Maximum Safe Input	5.5 mW	2.5 mW
Temperature Drift	0.00275 dB / $^{\circ}\text{C}$	0.00275 dB / $^{\circ}\text{C}$
Frequency Response Ripple	1.1 dB	1.1 dB
Connector Type	FC/PC	FC/PC


Ordering Information

Product Description

Product Code

Optical-to-Electrical Converter, 785 to 1550 nm, 2.92 mm connector with ProLink adapter	OE695G
Optical-to-Electrical Converter, 500–870 nm ProBus BNC Connector	OE425
Optical-to-Electrical Converter, 950–1630 nm ProBus BNC Connector	OE455
Optical-to-Electrical Converter, 500–870 nm ProLink BMA Connector	OE525
Optical-to-Electrical Converter, 950–1630 nm ProLink BMA Connector	OE555

PASSIVE PROBES

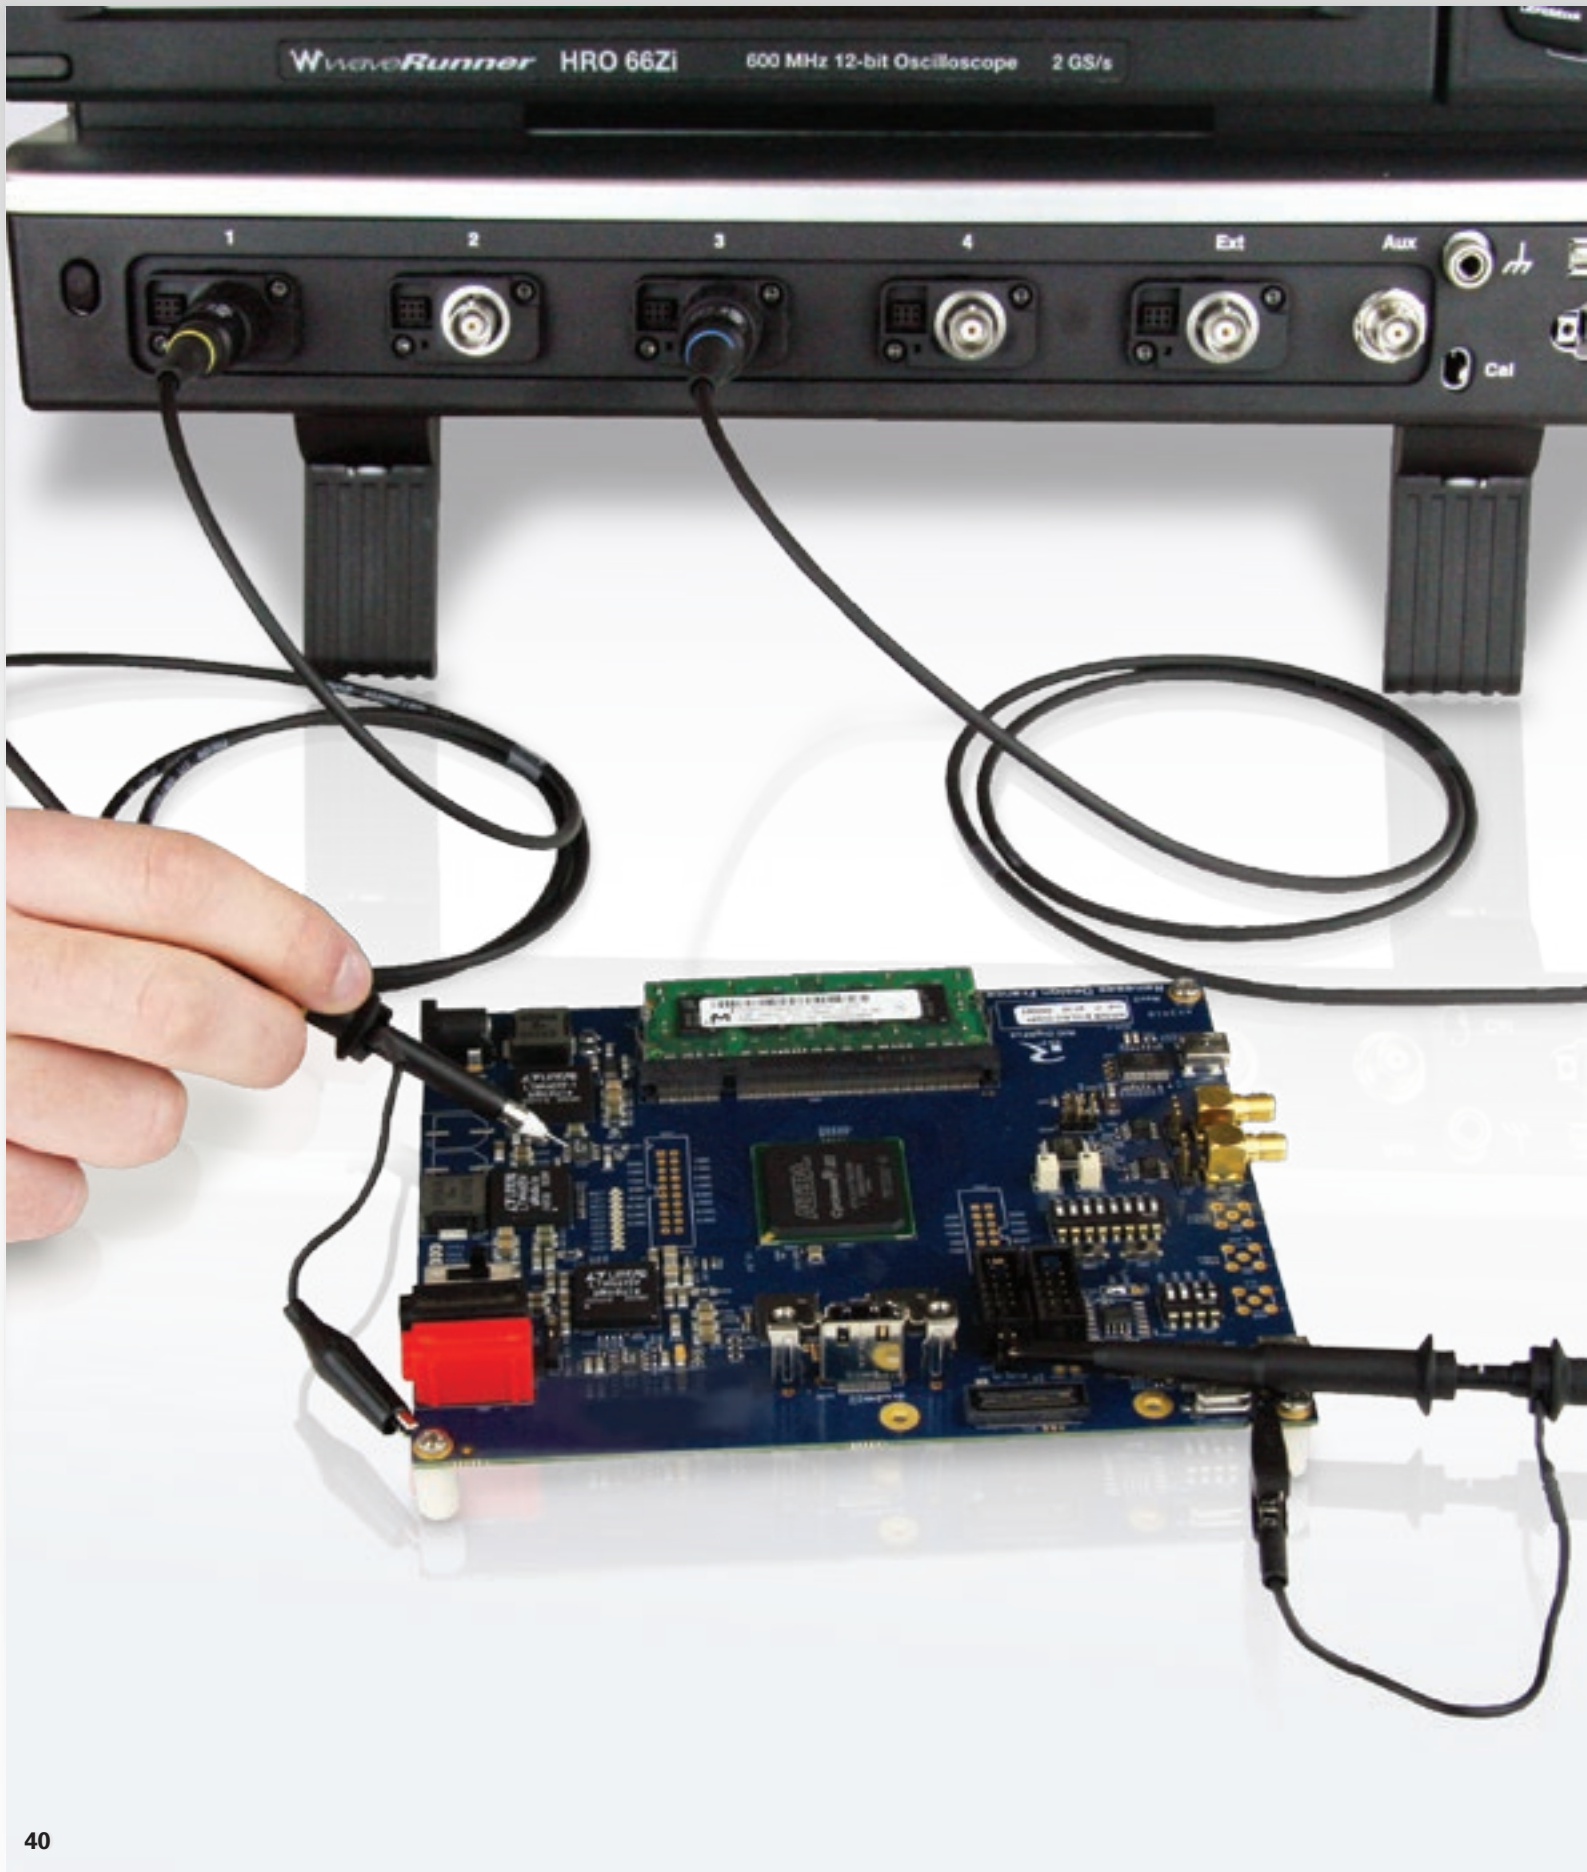

Passive probes are the standard probe provided with most oscilloscopes. Typical passive probes provide a $\times 10$ attenuation and feature a high input resistance of 10 M Ω . This high input resistance means that passive probes are the ideal tool for low frequency signals since circuit loading at these frequencies is minimized. Passive probes are designed to handle voltages of at least 400 V, some as high as 600 V. Teledyne LeCroy passive probes feature an attenuation sense pin which tells the oscilloscope to scale the waveforms automatically requiring no user input.

Teledyne LeCroy
Passive Probe
Model Numbers:

PP005A
PP006A
PP007-WR-1
PP008-1
PP009-1
PP010-1
PP011-1
PP016

PASSIVE PROBES



Teledyne LeCroy
Passive Probe
Model Numbers:

- PP005A
- PP006A
- PP007-WR-1
- PP008-1
- PP009-1
- PP010-1
- PP011-1
- PP016

Each passive probe is recommended for a certain oscilloscope, using the right passive probe with the right oscilloscope means that the probe can be properly compensated across the entire bandwidth. Using probes with a different oscilloscope will only let you compensate for low frequencies.

Features

- Bandwidth from 200 MHz to 500 MHz
- Probe encoding ring for automatic scale factor readout on Teledyne LeCroy oscilloscopes

Passive Probes Selection Guide Specifications


Types	Bandwidth (MHz)	Input R (Ω)	Input C (pF)	Attenuation	Maximum Voltage	Diameter (mm)
PP005A	500	10 M	11	$\div 10$	500 V	5
PP006A	500	10 M	12	$\div 10$	600 V	5
PP007-WR-1	500	10 M	9.5	$\div 10$	400 V	2.5
PP008-1	500	10 M	9.5	$\div 10$	400 V	2.5
PP009-1	500	10 M	9.5	$\div 10$	400 V	2.5
PP010-1	500	10 M	9.5	$\div 10$	400 V	2.5
PP011-1	50	10 M	9.5	$\div 10$	400 V	5
PP016	300 MHz/ 10 MHz	10 M Ω / 1 M Ω	12 pF/ 46 pF	$\div 10$ / $\div 1$	600 V	5 mm

Ordering Information


Product Description	Product Code
$\div 10$, 500 MHz 10 M Ω Passive Probe	PP005A
$\div 10$, 500 MHz 10 M Ω Passive Probe	PP006A
$\div 10$, 500 MHz 10 M Ω Passive Probe	PP007-WR-1
$\div 10$, 500 MHz 10 M Ω Passive Probe	PP008-1
$\div 10$, 500 MHz 10 M Ω Passive Probe	PP009-1
$\div 10$, 200 MHz 10 M Ω Passive Probe	PP010-1
$\div 10$, 500 MHz 10 M Ω Passive Probe	PP011-1
$\div 10$, 300 MHz 10 M Ω Passive Probe	PP016

PASSIVE PROBES


Passive Probe Accessories
for PP005, PP009, and PP011 Series

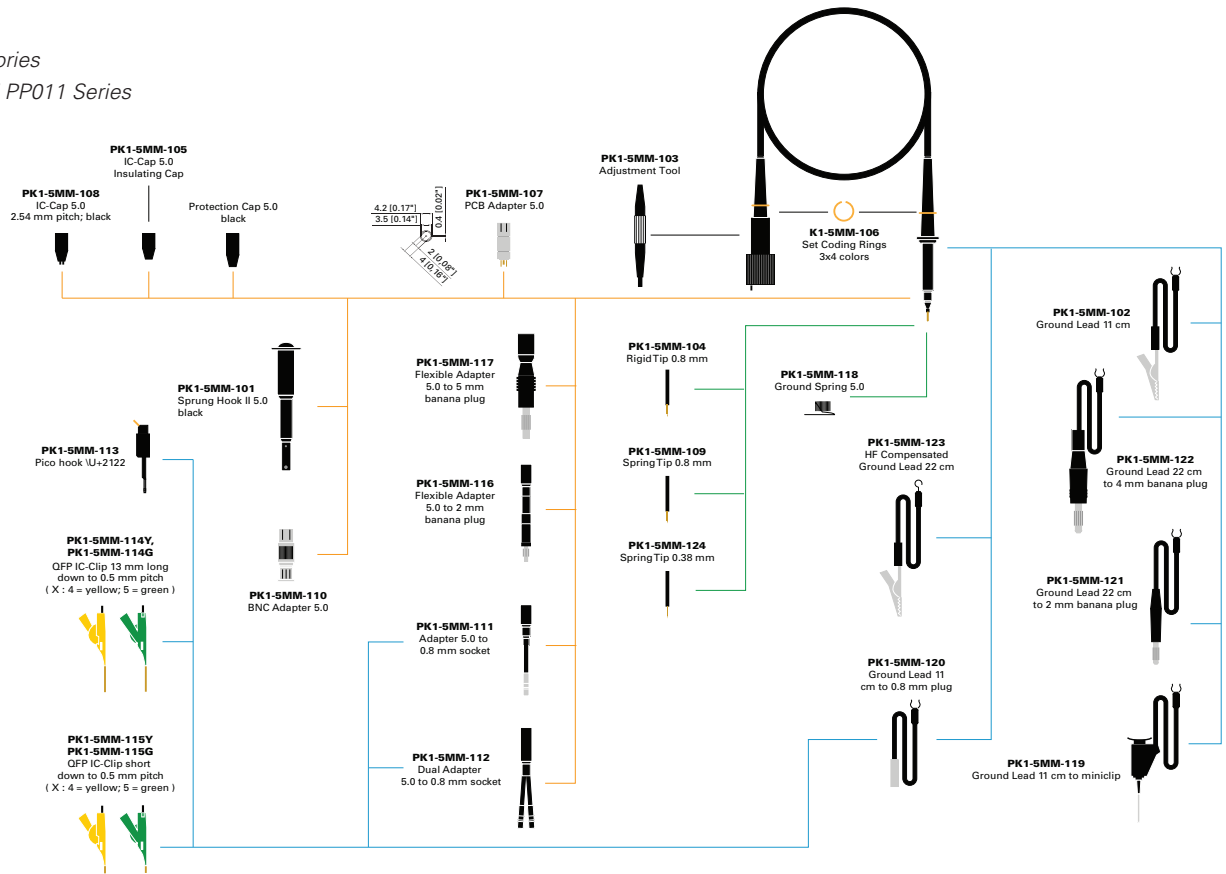

Passive Probe Accessories
for PP007 and PP008 Series

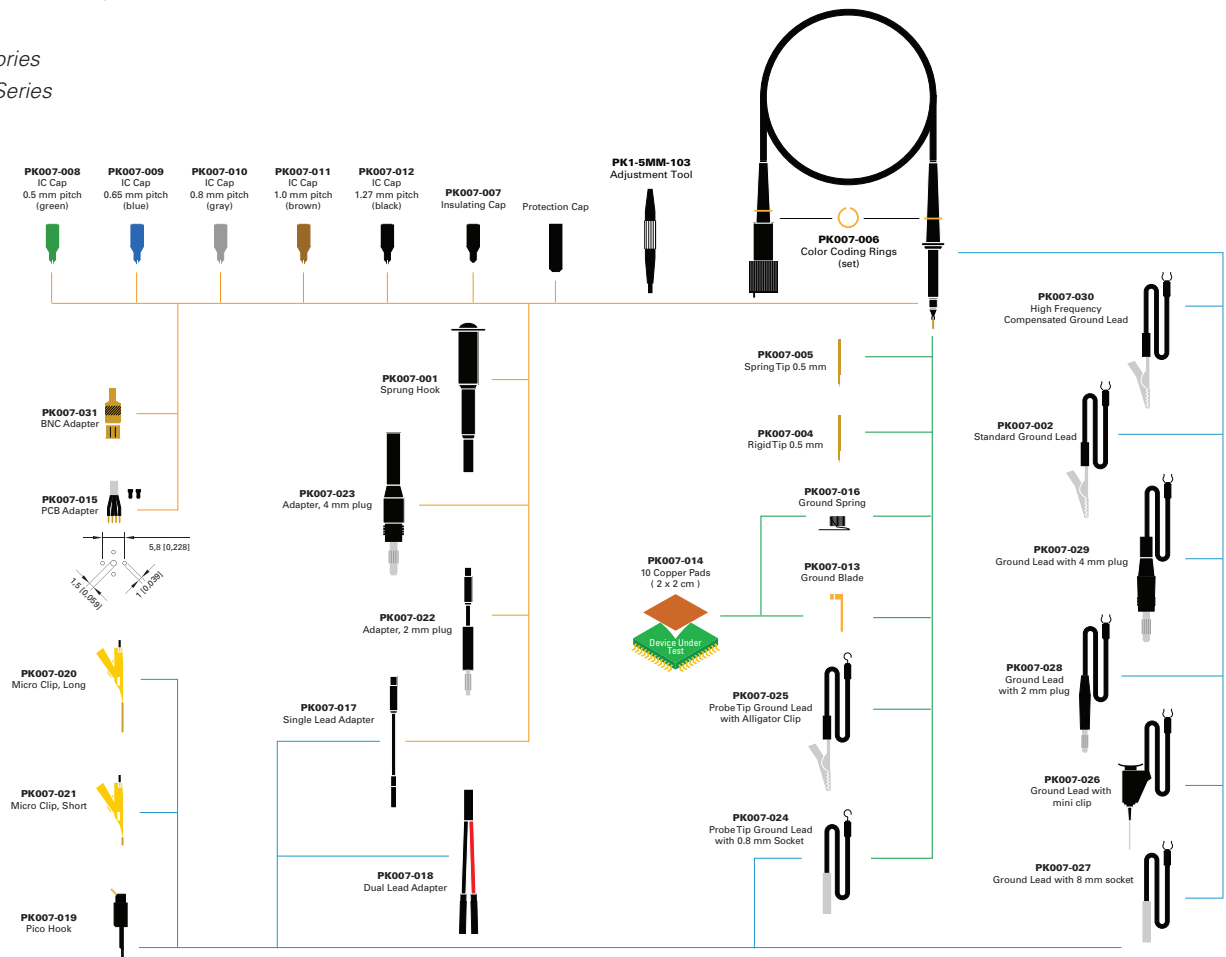

TRANSMISSION LINE PROBES

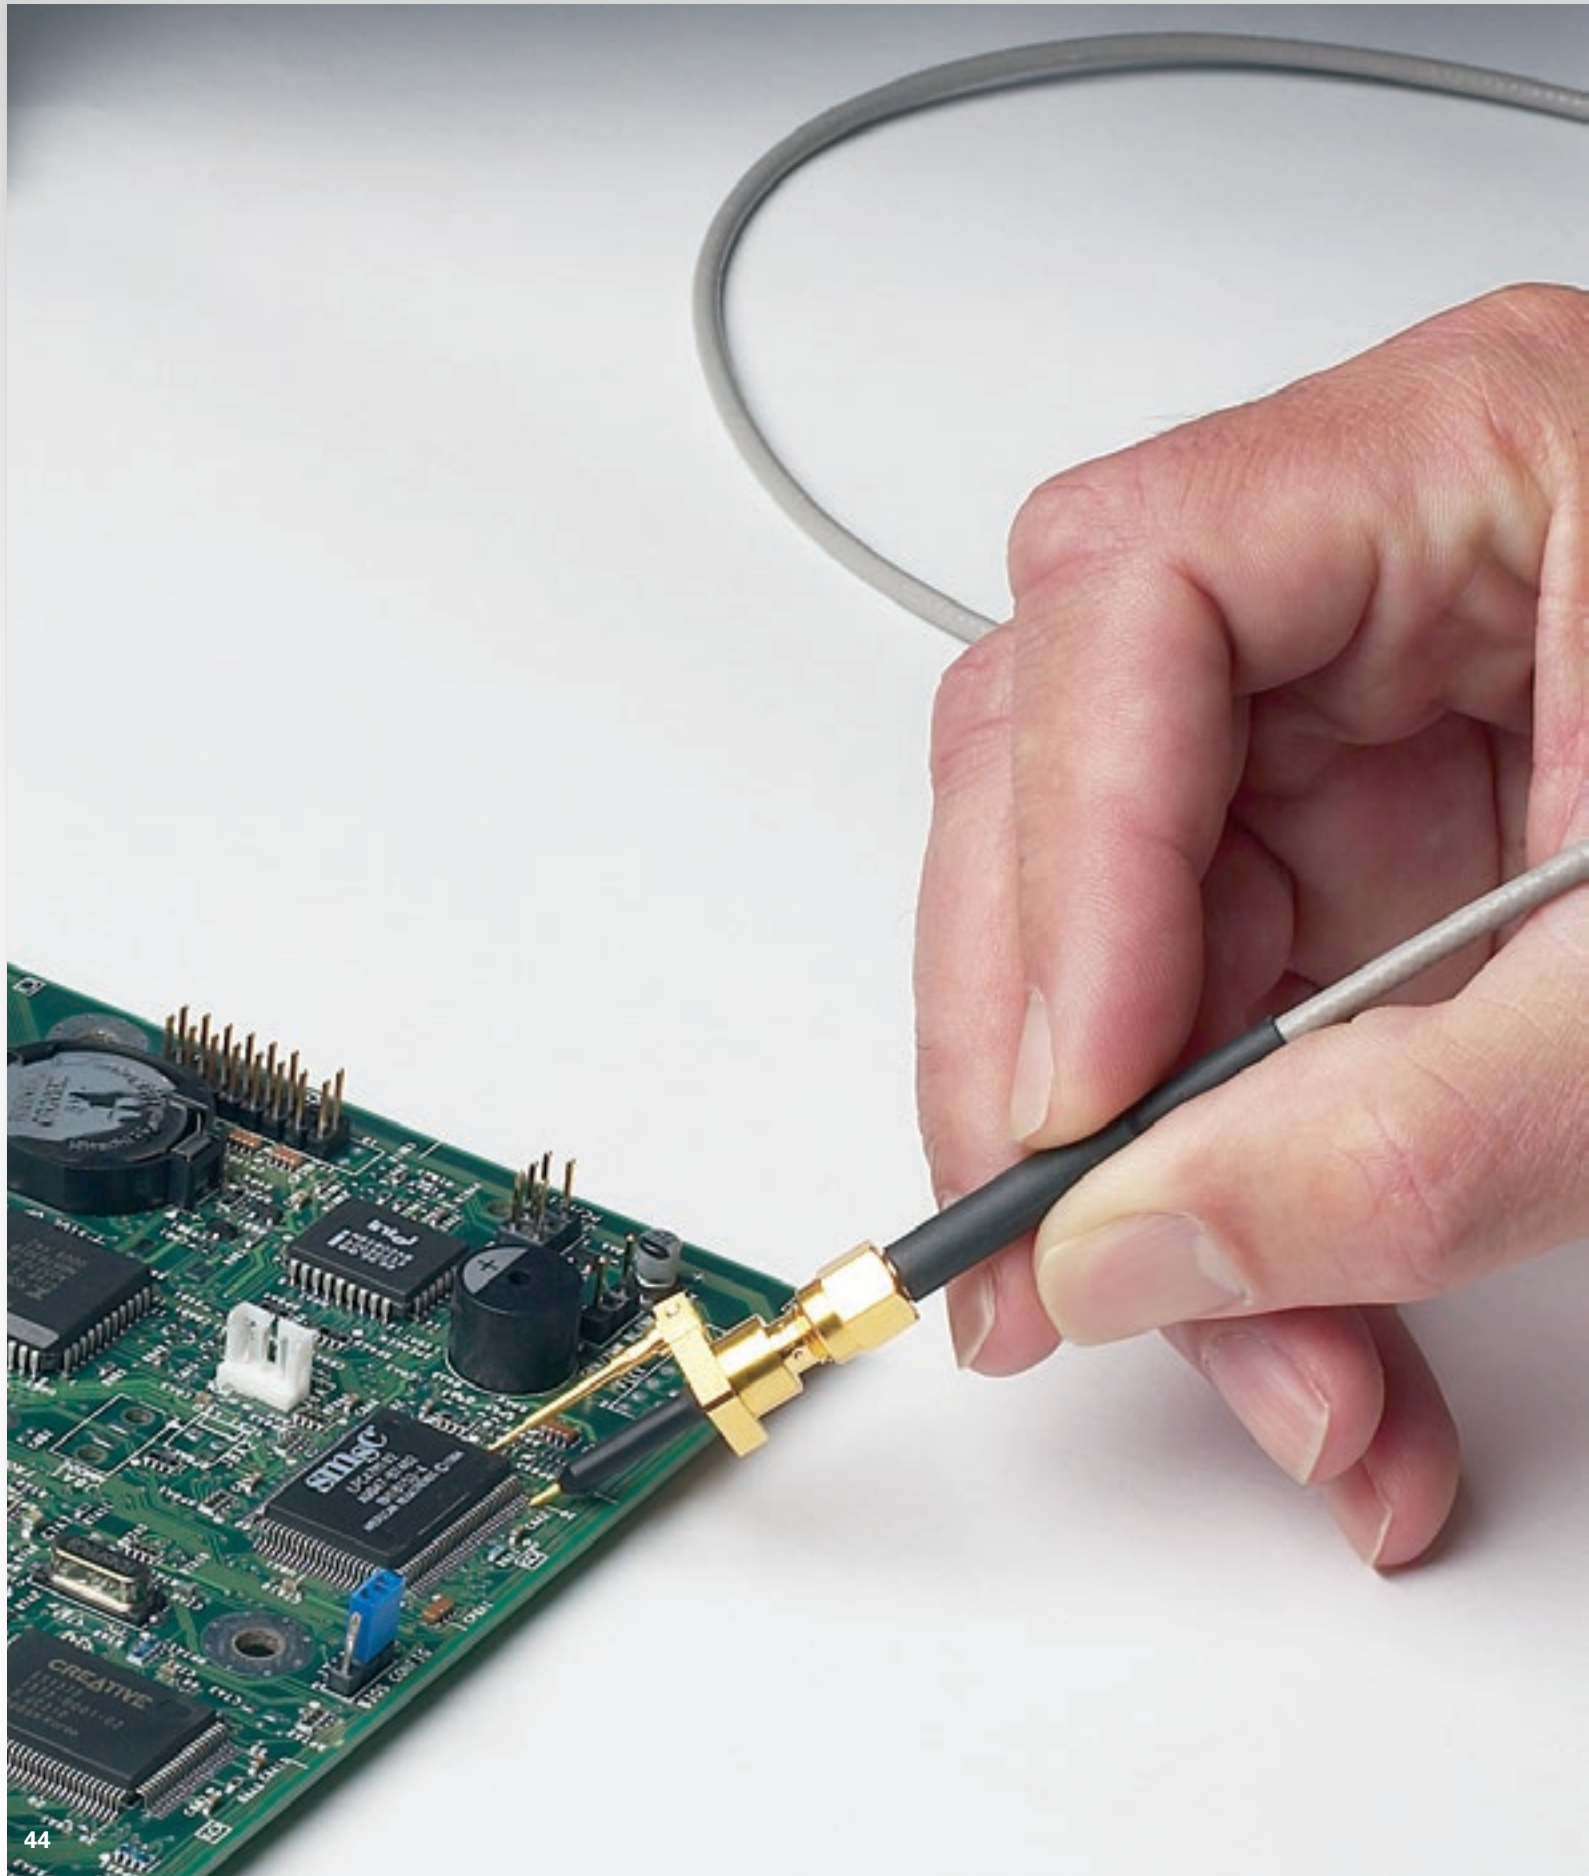

TRANSMISSION LINE PROBES

Teledyne LeCroy
Transmission Line Probe
Model Numbers:

PP066

PP065

Transmission line probes are a special type of passive probe designed for use at very high frequencies. They replace the high impedance probe cable found in a traditional passive probe with a precision transmission line, with a characteristic impedance that matches the oscilloscope input ($50\ \Omega$). This greatly reduces the input capacitance to a fraction of a picofarad, minimizing the loading of high frequency signals. A matching network at the tip increases the DC input resistance. While they have lower DC input resistance than a traditional passive probe (usually $500\ \Omega$ to $5\ \text{k}\Omega$), the input impedance of these probes remains nearly constant over their entire frequency range. A traditional $\div 10$ passive probe will have a $10\ \text{M}\Omega$ input impedance at DC, however this impedance drops rapidly with frequency, passing below the input impedance of a transmission line probe at less than 100 MHz.

In some applications, transmission line probes offer advantages over active probes. In addition to being less expensive, their passive design is more robust to over voltage and ESD exposure. They are useful in applications producing fast rising, narrow pulses with amplitudes which exceed the dynamic range of active probes. They also tend to have less parasitic effects on frequency response. A high BW transmission line probe driving a sampling oscilloscope can be used as a "golden standard" in situations when the response of an active probe measurement is questioned.

*Opposite page:
PP066 Transmission Line Probe*

TRANSMISSION LINE PROBES

Teledyne LeCroy
Transmission Line Probe
Model Numbers:

PP066
PP065



PP066

The PP066 is a high-bandwidth passive probe designed for use with the WaveMaster and other high-bandwidth oscilloscopes with 50 Ω input termination. This very low capacitance probe provides an excellent solution for higher frequency applications, especially the probing of transmission lines with 20–100 Ω impedance. The PP066 accommodates a wide range of applications, including probing of analog and digital ICs commonly found in computer, communications, data storage, and other high-speed designs.

Features:

- Interchangeable attenuator tips
- Signal integrity at high bandwidth
- Standard SMA cable connection
- Ultra low capacitance

PP066 Specifications

Electrical Characteristics

Bandwidth	DC to 7.5 GHz
Risetime	< 47 ps
Input Capacitance	< 0.20 pF
Input Resistance	500 Ω ($\div$ 10 cartridge) 1000 Ω ($\div$ 20 cartridge)
Maximum Voltage	15 V rms
Cable Length	1 m

Included with PP0066

PACC-AD001
SMA to BNC Adapter

TRANSMISSION LINE PROBES



PP065

The PP065 is a transmission line probe designed for use at very high frequencies. The probe’s input impedance remains nearly constant over its entire frequency range. Robust to over voltage and ESD exposure, it is particularly useful in applications producing fast rising, narrow pulses with amplitudes, which exceed the dynamic range of active probes.

Features:

- 1 GHz
- Low capacitance
- ÷100 1 GHz 5 k passive probe

PP065 Specifications

Bandwidth	1 GHz
Input Capacitance	1.5 pF
Input Resistance	500 Ω
Maximum Voltage	22 V
Attenuation	÷100

Ordering Information

Product Description	Product Code
7.5 GHz Low Capacitance Passive Probe (÷10, 1 k Ω ; ÷20, 500 Ω)	PP066
1 GHz Low Capacitance Passive Probe (÷10, 5 k Ω)	PP065



1-800-5-LeCroy
teledynelecroy.com

**Local sales offices are located throughout the world.
Visit our website to find the most convenient location.**