


# Supplementary Fuseblocks

## Type M, For $1\frac{3}{32}$ " x $1\frac{1}{2}$ " Fuses

### 600 Volt AC, $\frac{1}{10}$ to 30 Amps

## BM Series

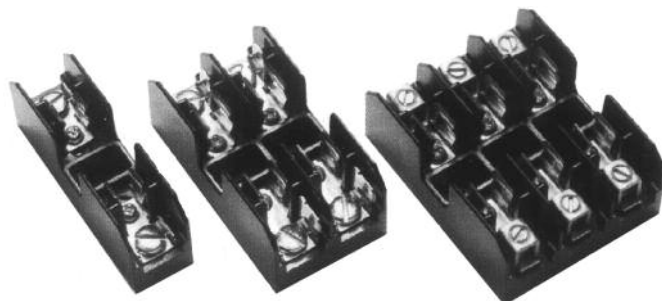

**Catalog Symbol:** BM Series

**Type M Supplementary Fuseblocks**

**Ampere Rating:**  $\frac{1}{10}$  to 30 Amperes

**Voltage Rating:** 600 Volts AC

**Withstand Rating:** 10,000 A RMS Sym. or interrupting rating of the fuse used, whichever is lower.

**Agency Information:**

U.L. Recognized, U.L. 512, Guide IZLT2, File E14853

CSA Certified, C22.2 No. 39, Class 6225-01, File 47235

For use with any  $1\frac{3}{32}$ " x  $1\frac{1}{2}$ " Fuses

(Bussmann KTK, FNQ, FNM, BAF, BAN and AGU)

**U.L. Flammability:** 94 V0

**Material:** Thermoplastic

#### Catalog Data (600V)

| Amps           | Poles | Terminal Type             |                                  |         | Fig. No. |
|----------------|-------|---------------------------|----------------------------------|---------|----------|
|                |       | Screw with Quick Connect* | Pressure Plate w/ Quick Connect* | Box Lug |          |
| $\frac{1}{10}$ | 1     | BM6031SQ                  | BM6031PQ                         | BM6031B | 1        |
| to             | 2     | BM6032SQ                  | BM6032PQ                         | BM6032B | 2        |
| 30             | 3     | BM6033SQ                  | BM6033PQ                         | BM6033B | 3        |

Wire  
Range  
CU Only



#10-#18



#10-#18




#6-#14

\* QUICK CONNECT RATED FOR 20A MAXIMUM.


CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000 Vac, 75-1500 Vdc). Refer to BIF document #8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

#### Dimensional Data All dimensions ( $\pm 0.015$ )


##### 1 POLE

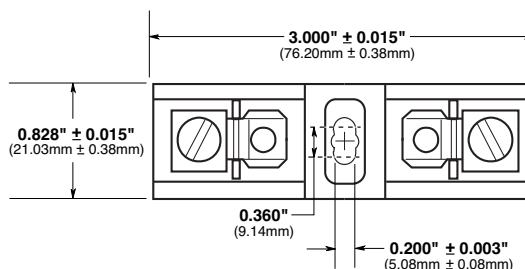


##### 2 POLE

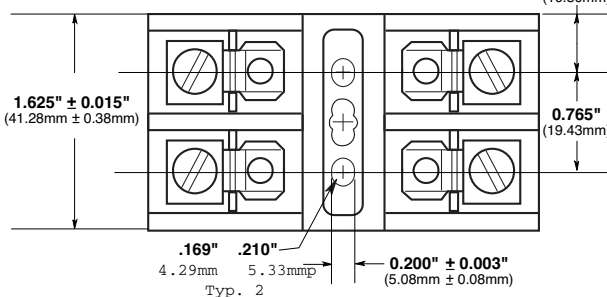

##### 3 POLE

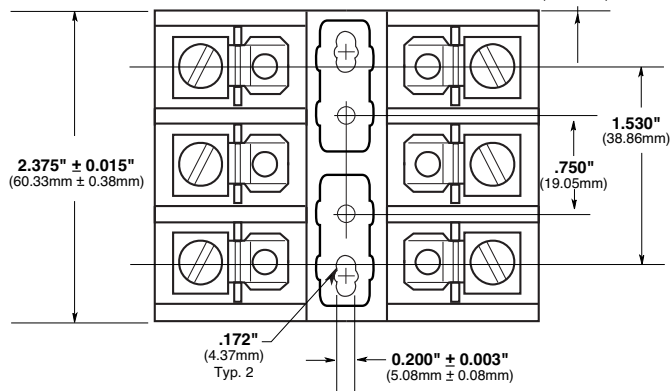

#### FUSEBLOCK LABEL (EXAMPLE SHOWN)

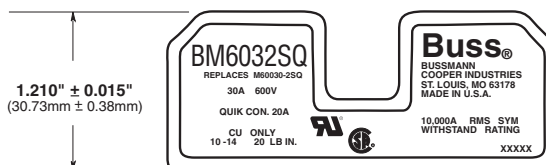

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.