
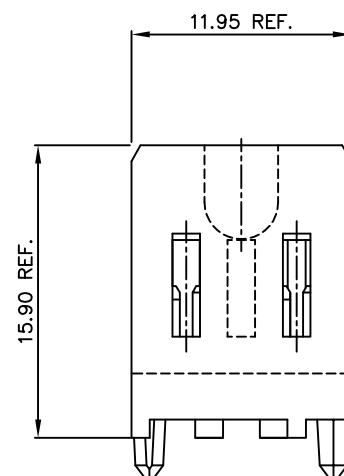
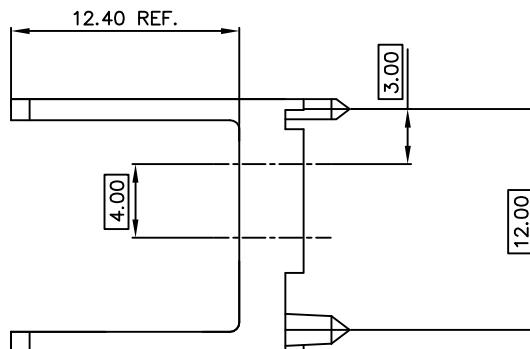


1 2 3 4 5 6 7 8


PRODUCT NO. 70243-101LF
70243-111LF

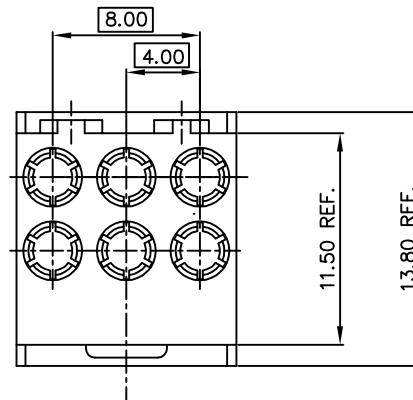

NOTE:

- 1) MATERIAL:
LIQUID CRYSTAL POLYMER
30% GLASS.
FLAME RETARDANT ACC. UL 94-VO
COLOR NATURAL.
- 2) WHEN USING THIS PRODUCT IN A
STRAIGHT TO BOARD APPLICATION
THE FOLLOWING MUST BE TAKEN
INTO ACCOUNT.
-101LF HOUSING IS TO BE USED
FOR THE SOLDER TO BOARD
INSERT 88980-00Z.
-111LF HOUSING IS TO BE USED
FOR THE PRESS-FIT TO BOARD
INSERT 88978-001.
- 3) THIS PRODUCT WITH "LF" SUFFIX MEETS EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS -22-008.
- 4) THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MINIMUM THICK
CIRCUIT BOARD.

These hole are required when a shroud is used

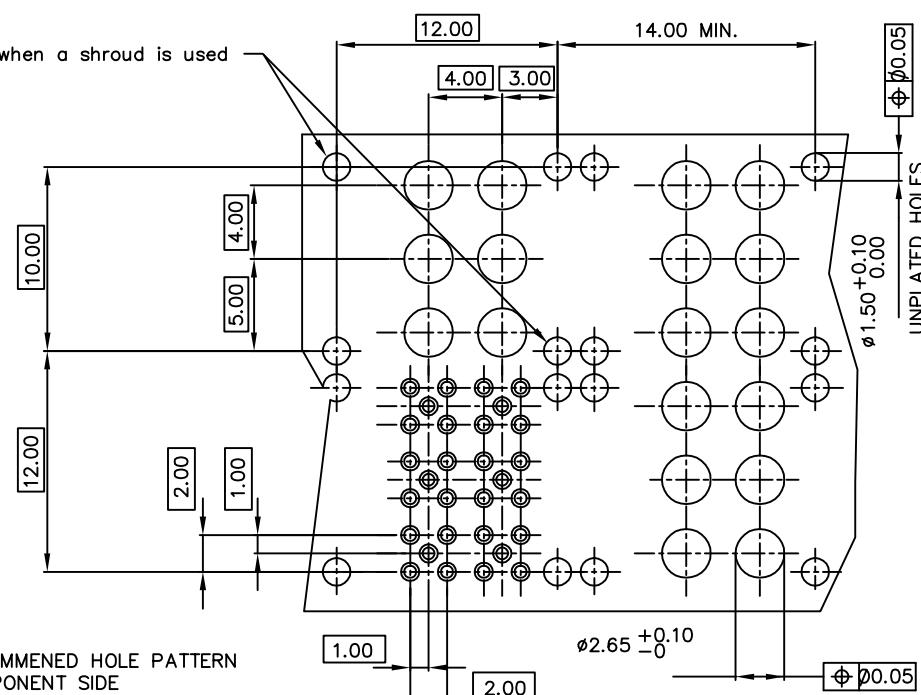

RECOMMENDED HOLE PATTERN
COMPONENT SIDE
FOR FEEDTHROUGH AND
SOLDER TO BOARD.

mat'l. code SEE NOTE 1.			tolerances unless otherwise specified		CUSTOMER COPY	title	ELECTRONICS	
ltr	ecn no	dr	date				projection	www.fciconnect.com
A	H10290	DAN	910912	linear				
B	H10402	DAN	911229					
C	H20755	DAN	921124	angles				
D	H40801	RV	941208	dr	D Andrews	910912	mm	product family
E	H90489	IME	990816	eng	D Andrews	941208	sizedwg no	ETRAL(lm)
F	DC05-0367	CLU	050927	chr	A v Zanten	910912	scale	code
				opp	H v Woensel	910912	5:1	213
								sheet
								1 of 1

PDM: Rev F STATUS: Released

Printed: May 19, 2018

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI:

70243-111