

DUAL ENTRY SOLENOID KEY OPERATED SAFETY INTERLOCK NOMENCLATURE


GK

BODY / INDICATOR		CONDUIT / SEAL		BASIC		HEAD		KEY		TYPE / OVER-RIDE		SOLENOID VOLTAGE	MODIFICATION CODE
L	HEAD TO LEFT - WITH INDICATORS	A	1/2 NPT - VITON SEALS	2	2 SNAP ACTION DPDT	L	OPENING TO FRONT AND TOP	6	STRAIGHT	A	SOLENOID UNLOCK WITH SCREWDRIVER	1 12 VDC	F04
R	HEAD TO RIGHT - WITH INDICATORS	B	PG 13.5 - VITON SEALS	3	2 SLOW ACTING SPDT BBM	M	OPENING TO RIGHT AND TOP	7	90 DEGREE		SLOT OVER-RIDE	2 24 VDC	F05
F	HEAD TO LEFT - WITHOUT INDICATORS	C	20 MM - VITON SEALS	6	SLOW ACTING 2 NC	N	OPENING TO BACK AND TOP	8	UP - DOWN, SPRING LOADED	B	SOLENOID UNLOCK WITHOUT OVER-RIDE	3 48 VDC	FW
G	HEAD TO RIGHT - WITHOUT INDICATORS	D	PF 1/2 - VITON SEALS	10	SLOW ACTING 4 NC	P	OPENING TO LEFT AND TOP	9	SIDE - SIDE, SPRING LOADED	S	SOLENOID LOCK WITH SCREWDRIVER	4 120 VAC	
		E	1/2 NPT - BUNA-N SEALS	12	SLOW ACTING 2 NC - 1 NO BBM			X	NO KEY		SLOT OVER-RIDE	6 240 VAC	
		F	PG 13.5 - BUNA-N SEALS	14	SLOW ACTING 2 NC - 2 NO BBM					T	SOLENOID LOCK WITHOUT OVER-RIDE		
		G	20 MM - BUNA-N SEALS	15	SLOW ACTING 2 NC - 2 NO BBM - GOLD								
		H	PF 1/2 - BUNA-N SEALS	16	SLOW ACTING 3 NC - 1 NO BBM								
				30	2 SLOW ACTING 4 NC - GOLD								
				32	2 SLOW ACTING 2 NC - 1 NO BBM - GOLD								
				34	2 SLOW ACTING 2 NC - 2 NO BBM - GOLD								
				36	2 SLOW ACTING 3 NC - 1 NO BBM - GOLD								
				40	2 SLOW ACTING 4 NC								
				42	2 SLOW ACTING 2 NC - 1 NO BBM								
				44	2 SLOW ACTING 2 NC - 2 NO BBM								
				46	2 SLOW ACTING 3 NC - 1 NO BBM								




NOTES

- 1 - ZINC DIECAST BODY AND HEAD WITH STEEL COVER. BODY, HEAD AND COVER FINISHED WITH EPOXY PAINT
- 2 - PROVIDED WITH PLASTIC SNAP FIT COVER TO PLUG UNUSED KEY ENTRY WINDOW
- THE LEFT INDICATOR IS GREEN AND THE RIGHT INDICATOR IS RED. NOT PRESENT ON BODY/INDICATOR CODES F OR G
- 4 - MAXIMUM OPERATING FREQUENCY (Fmax) = 100 OPS/MIN
- 5 - INSERTION FORCE = 35 N
8 LB
EXTRACTION FORCE = 28 N
6 LB
MAXIMUM SOLENOID LOCKING FORCE = 1000 N
224 LB
- ROTATE 1/4 TURN CLOCKWISE TO UNLOCK DEVICES WITH HEAD TO LEFT, SOLENOID UNLOCK AND DEVICES WITH HEAD TO RIGHT, SOLENOID LOCK. ROTATE 1/4 TURN COUNTERCLOCKWISE TO UNLOCK DEVICES WITH HEAD TO LEFT, SOLENOID LOCK AND DEVICES WITH HEAD TO RIGHT, SOLENOID UNLOCK.
- NOT PRESENT ON TYPE/OVER-RIDE CODES B OR T
- SWITCH MUST OPERATE BEFORE REACHING MINIMUM INSERTION DISTANCE
- 8 - T-15 TAMPERPROOF TORX DRIVER BIT PROVIDED
- ELECTRICAL RATINGS ARE FOR BASIC SWITCHES
- 10 - MINIMUM SOLENOID VOLTAGE = 80% DC / 85% AC OF RATED VOLTAGE
MAXIMUM SOLENOID VOLTAGE = 110% OF RATED VOLTAGE
SOLENOID POWER = 12 WATTS NOMINAL
- SEE PAGES 10, 11, 12 AND 13 FOR CIRCUIT DIAGRAMS
- 12 - NO CHANGES CAN BE MADE TO THIS DRAWING WITHOUT JOINT FREEPORT / NEWHOUSE APPROVAL
- THE LEFT INDICATOR IS YELLOW AND THE RIGHT INDICATOR IS RED
- 10-PIN CONNECTOR, BRAD HARRISON PART NO.3RI006AZIF010 OR EQUIVALENT
- 4-PIN CONNECTOR, WOODHEAD PART NO.80599-19 OR MOLEX PART NO.08631MZ1 OR EQUIVALENT
- 5-PIN CONNECTOR, BRAD HARRISON PART NO.41310 OR EQUIVALENT
- CONNECTOR INSTALLED IN BOTTOM CONDUIT HOLE
- CONNECTOR INSTALLED IN SIDE CONDUIT HOLE
- FOR CONNECTOR AND CIRCUIT DETAILS OF MODIFICATION CODE, REFER PAGE 14 FOR CODE F05, PAGE 15 FOR CODE FW AND PAGE 16 FOR CODE F04


ELECTRICAL RATING				ENVIRONMENTAL RATINGS	APPROVALS
AC		DC		IP68 NEMA 1, 4, 6P, 12 & 13	 IEC 947-5-1 EN60947-5-1
A300	AC 15	Q300	DC 13	TEMP RANGE -25°C TO 40°C	
Ue	Ie	Ue	Ie	-13°F TO 104°F	
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)	STORAGE -40°C TO 120°C	
120	6	24	2.9	-40°F TO 248°F	
240	3	125	.55	SHOCK: 50G PER IEC 68-2-27	
		250	.27	VIBRATION: 10G PER IEC 68-2-6	
Ith = 10 A					

THIRD ANGLE PROJECTION					
					
SCALE		NTS			
DO NOT SCALE PRINT					
TOLERANCES					
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1					
	DIM.		DIM.		TOL.
	mm		in.		mm/16
NO PLACES	2	1/16	2.1		0.81/0.03
ONE PLACE	1.2	0.0156	1.2X		0.384/0.01
TWO PLACES	1.2X	0.157	1.2X		0.131/0.005
THREE PLACES					
ANGLES					
DESIGN UNITS		SI METRIC		US CUSTOMARY	
		☒		☐	
WEIGHT 1,5 kg / 3.3 LB					

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			
FED. MFG. CODE 91929		CATALOG LISTING	
a Honeywell Division		SWITCH - DOOR INTERLOCK	
		GK SERIES CHART 4	

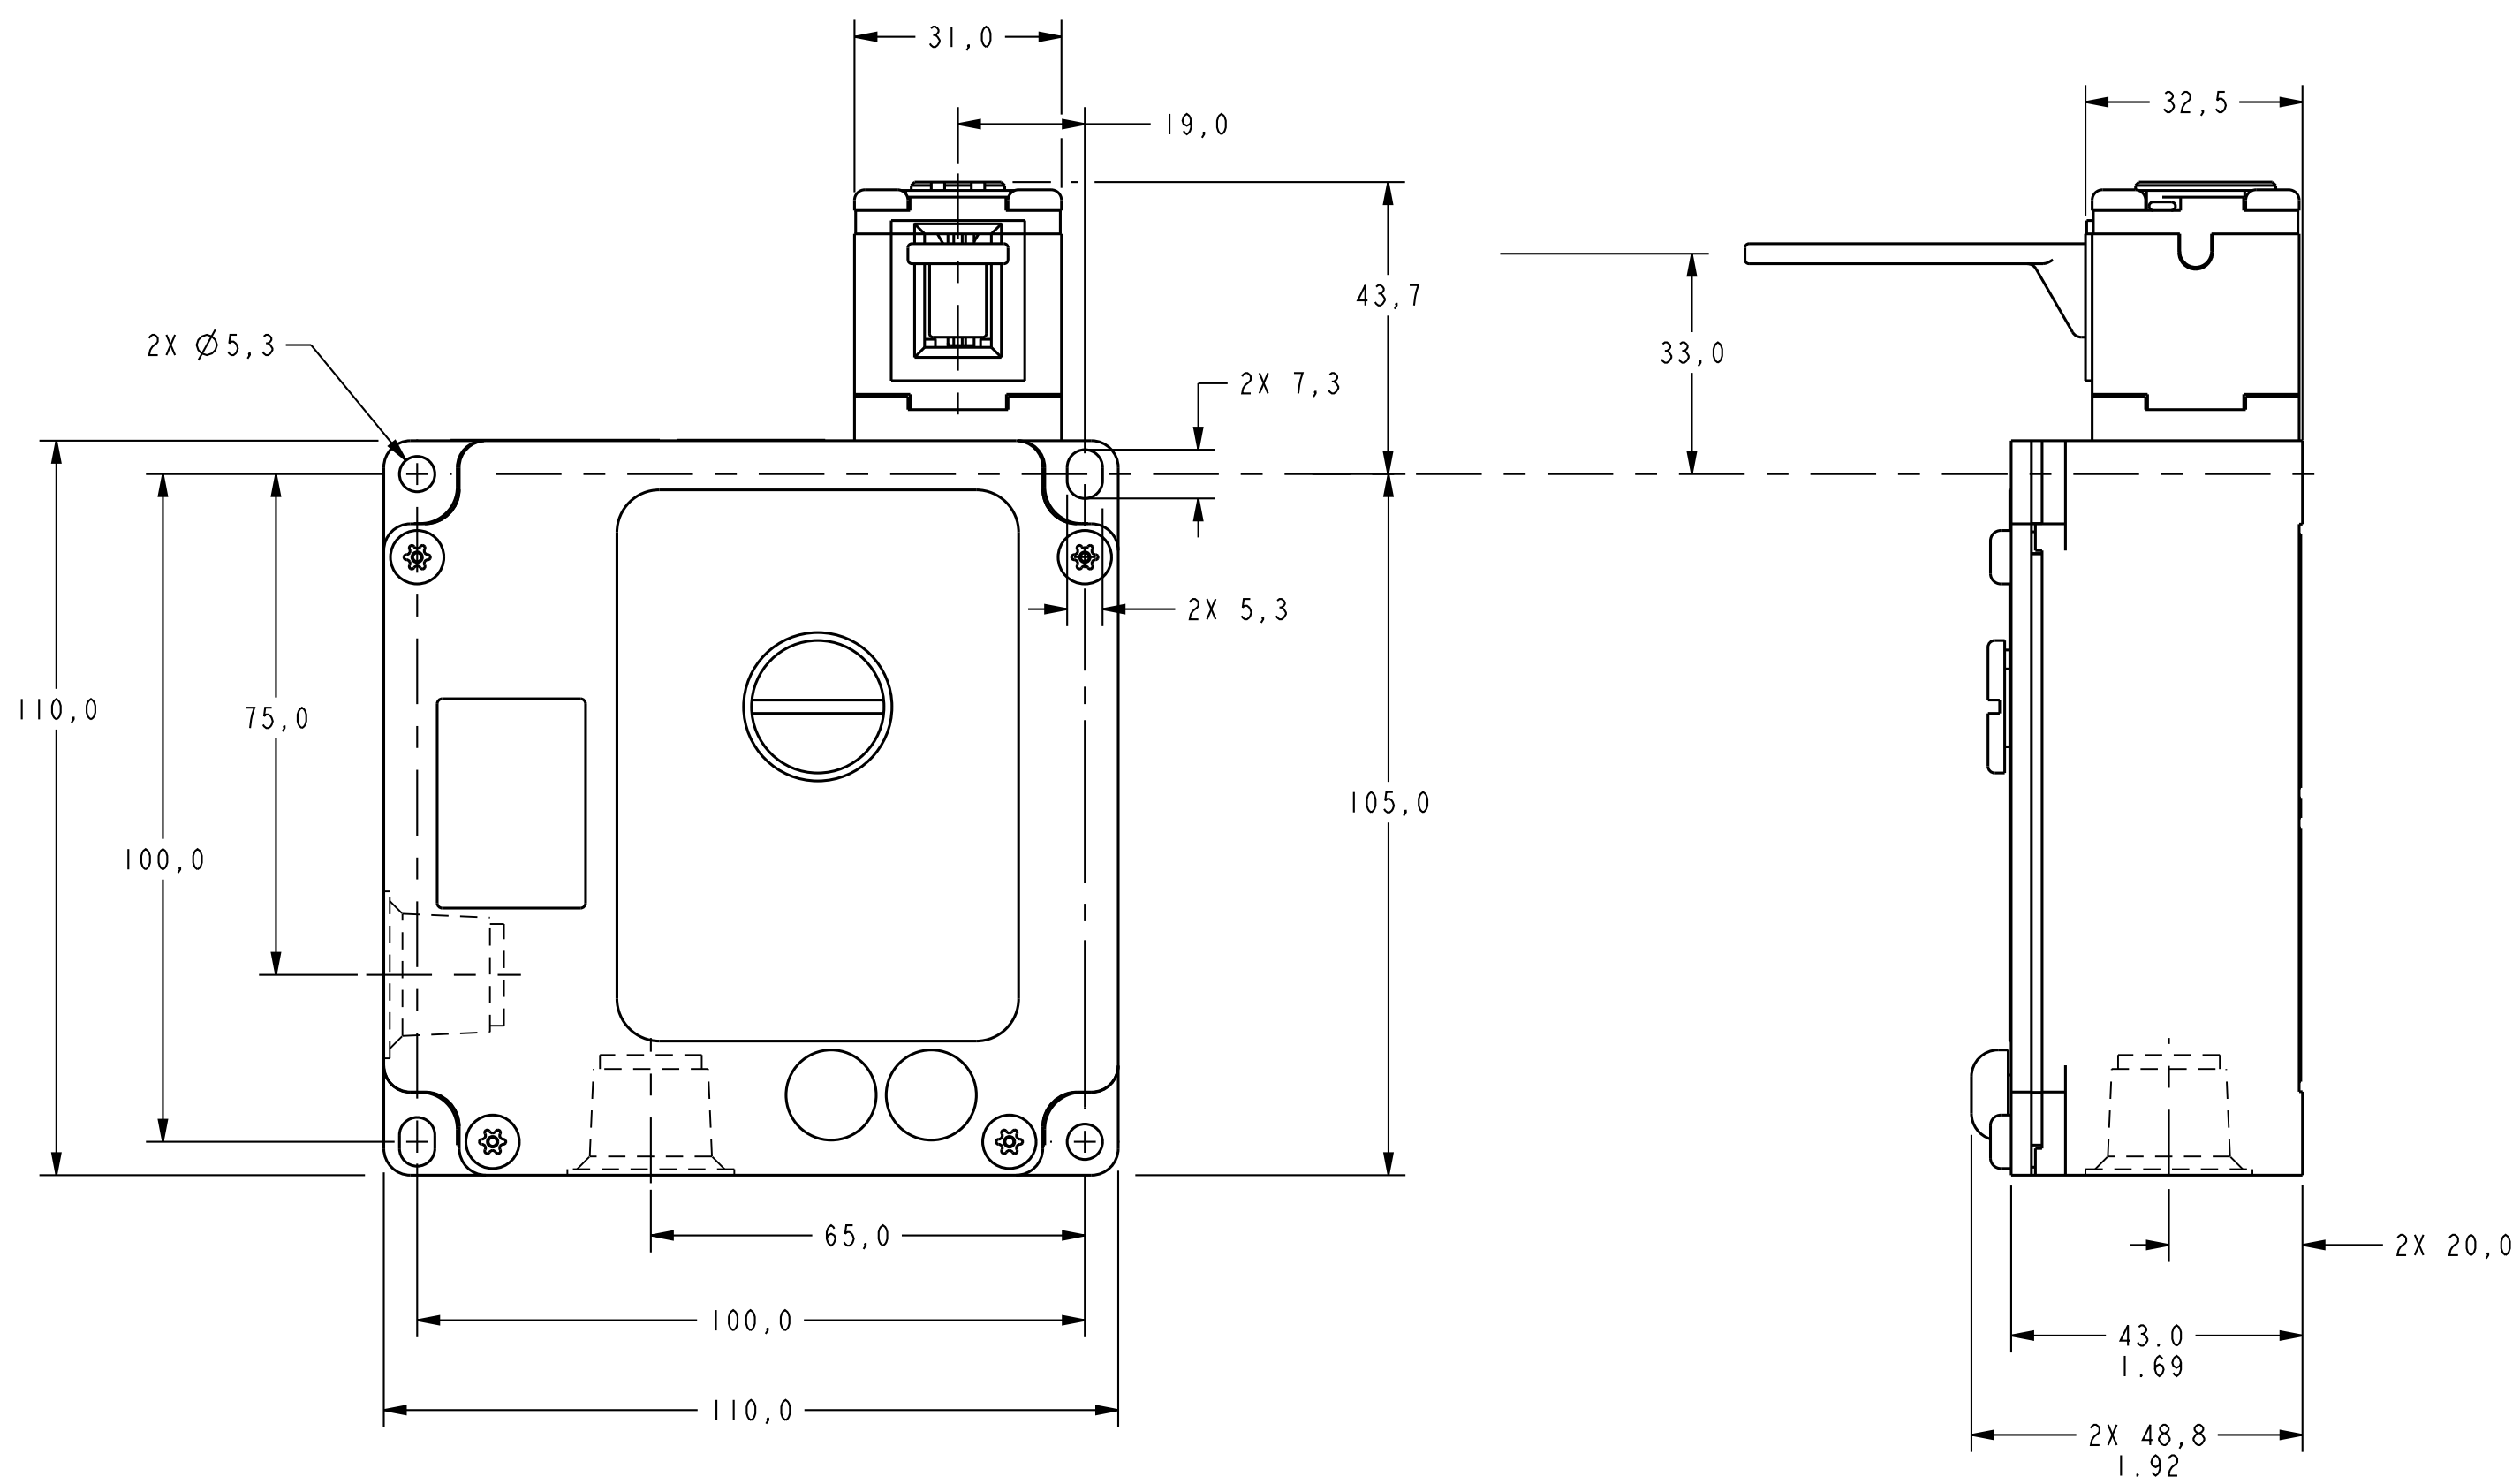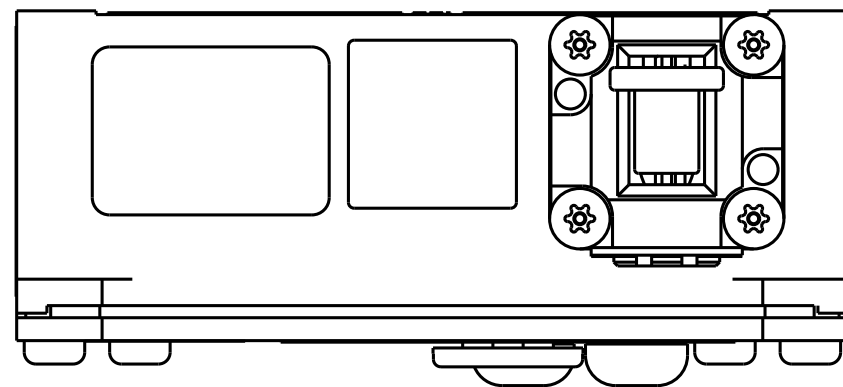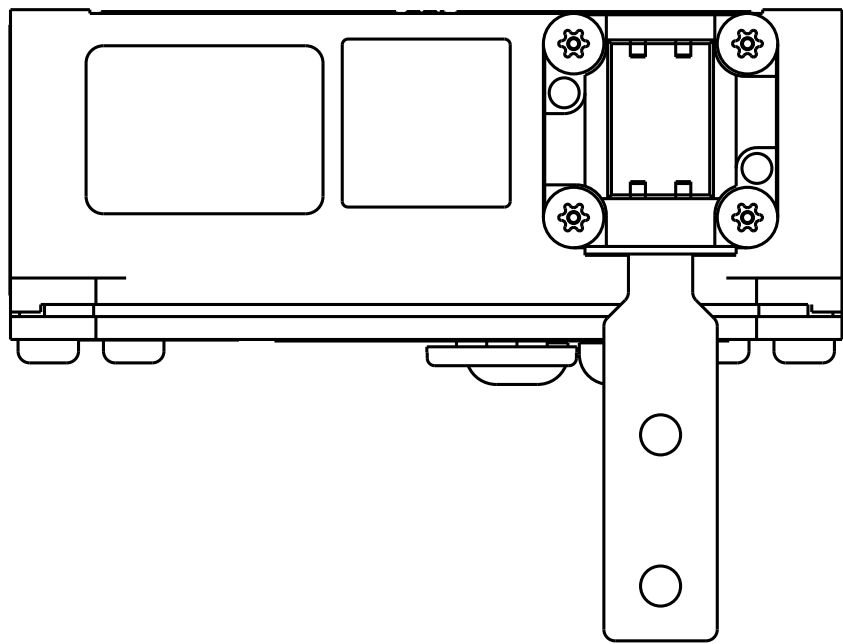

FRONT KEY ENTRY

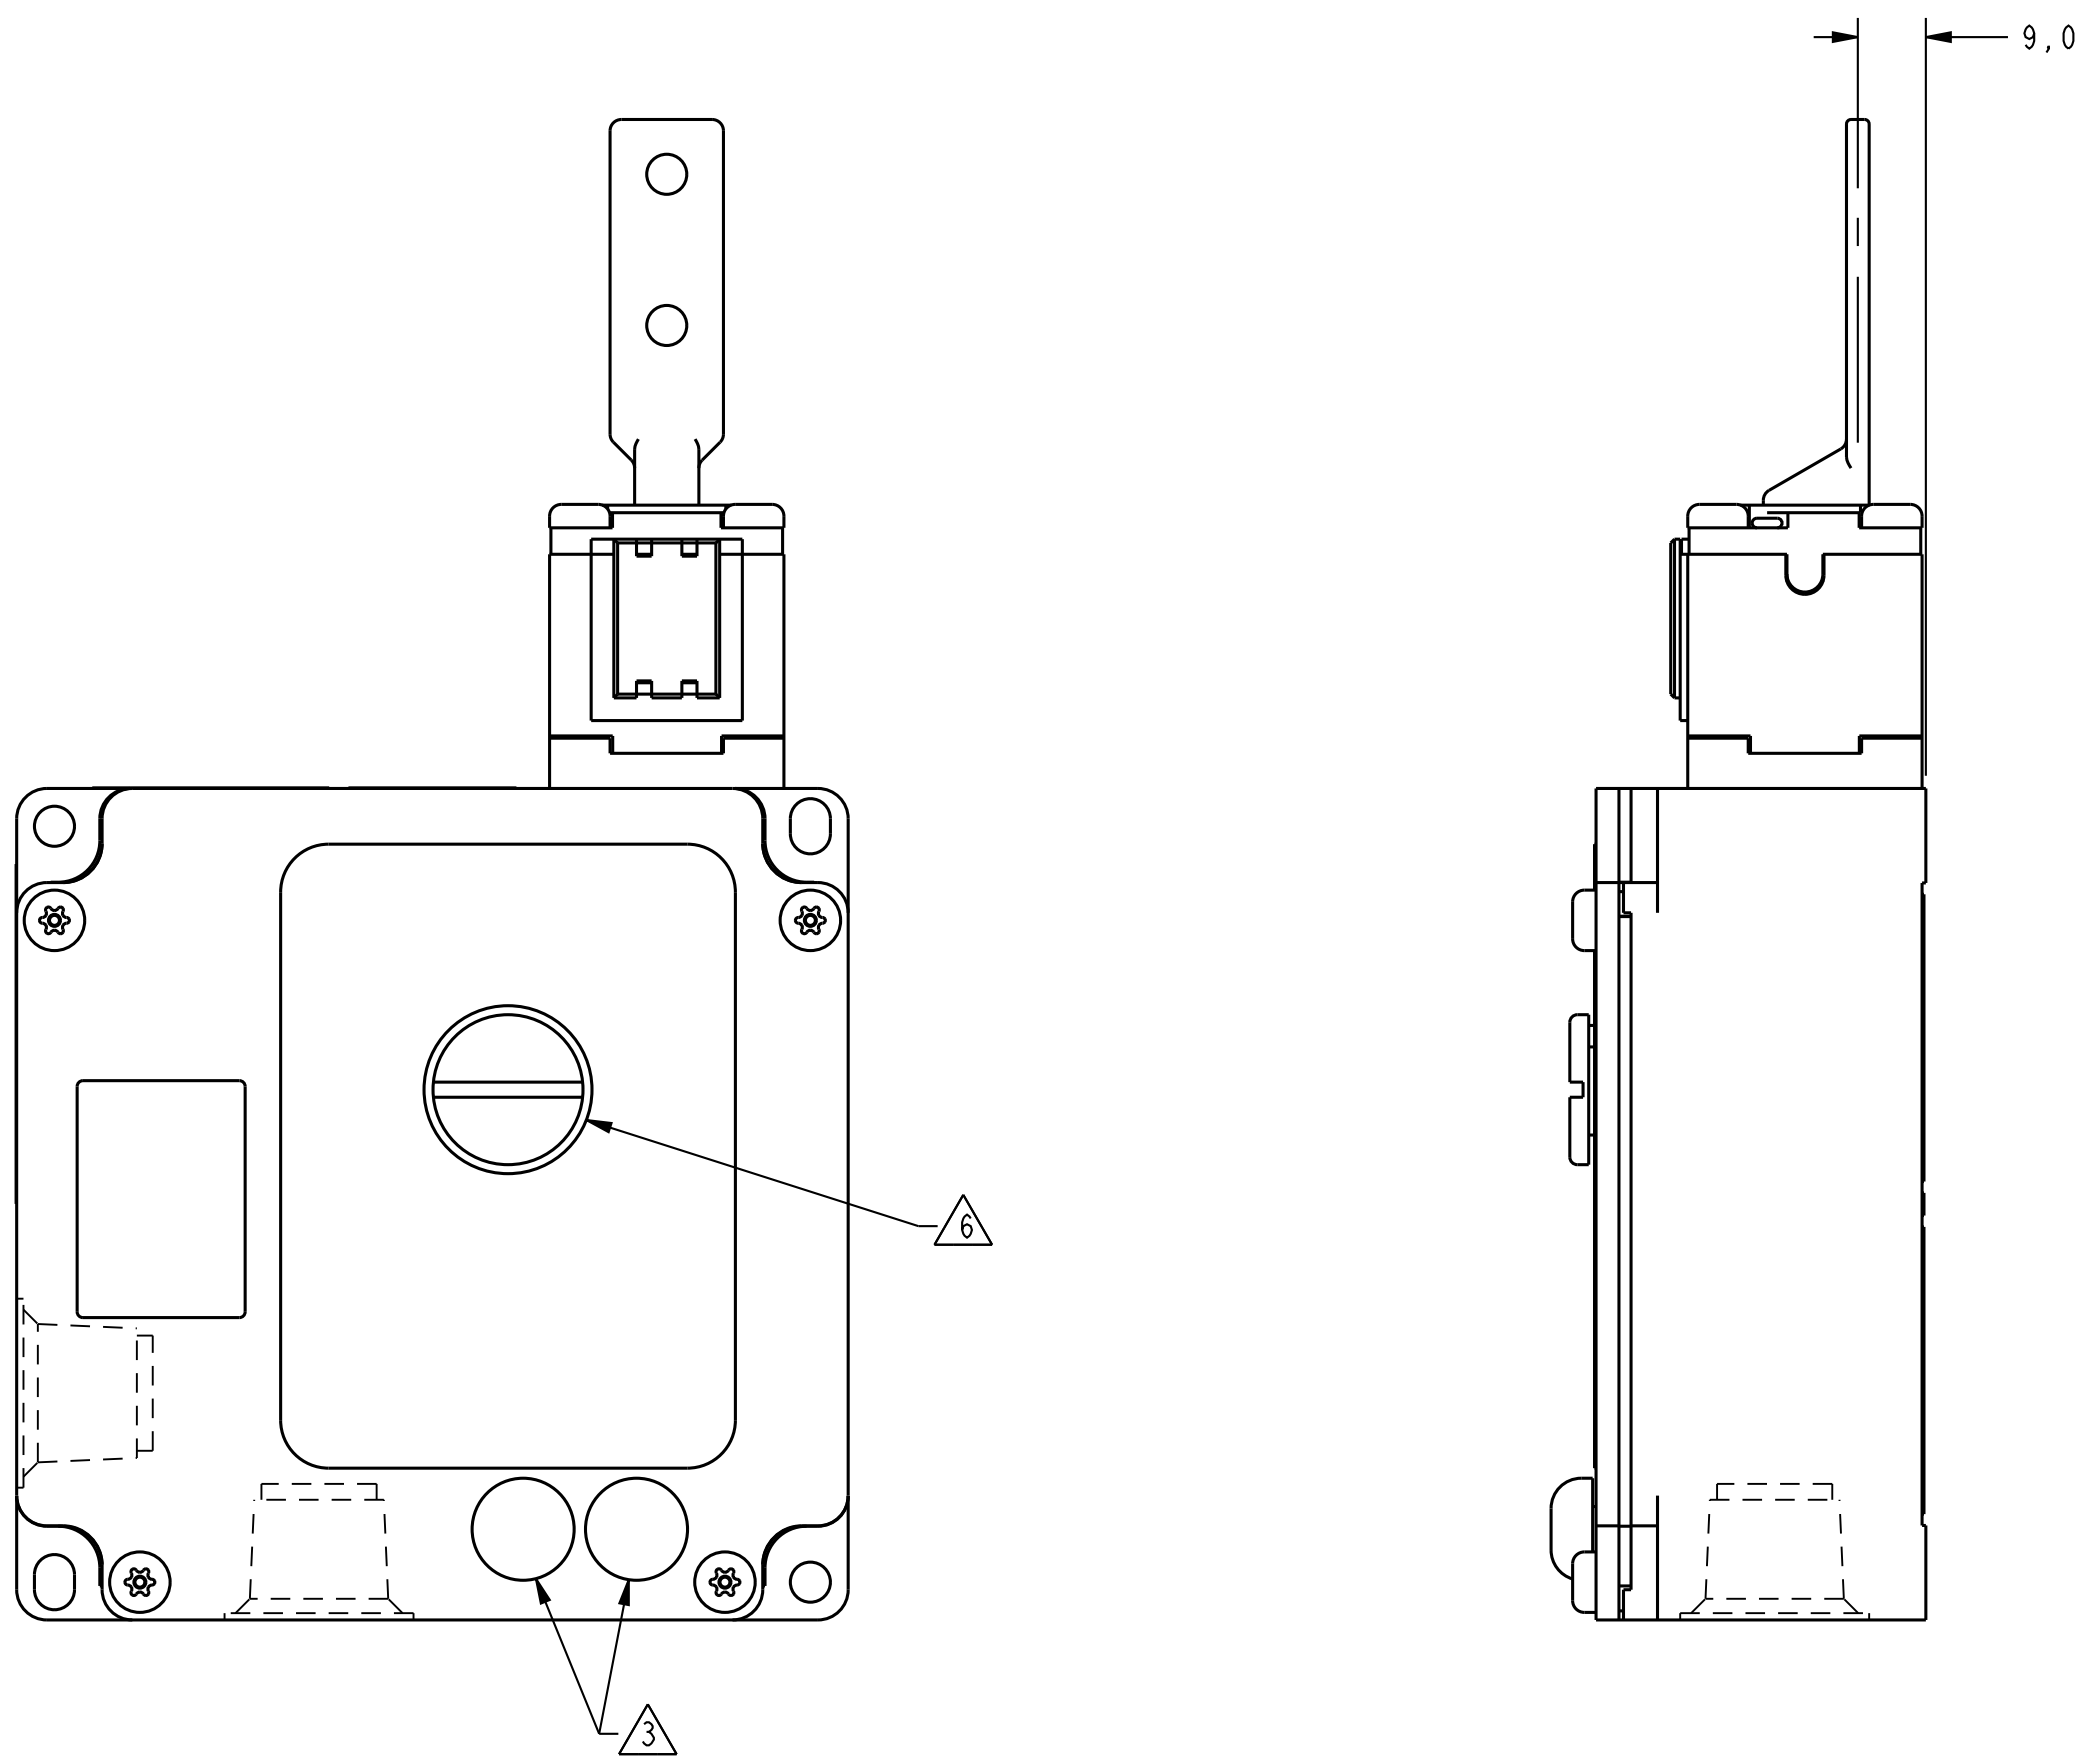




TOP KEY ENTRY

BODY / INDICATOR CODES R OR G

PTC/CAD	3D	DRAWN	WAM	129SEP	98	CHECK	CMH	11MAY99	CHECK	PRS	04FEB09	CHECK	CMH	10NOV11	RELEASE NO. PR-23758	PAGE	2 OF 16	REPLACES	-
ISSUE	5254	DRAWING NUMBER	0047583	REV	04FEB09	DATE	0065737	31MAY10	R	0083578	REV	0083578	REV	0083578	REV	0083578	REV	0083578	REV

REVISIONS	DATE	BY	CHKD	APPD
1	04FEB09	CMH	PRS	CMH
2	04FEB09	CMH	PRS	CMH
3	04FEB09	CMH	PRS	CMH
4	04FEB09	CMH	PRS	CMH
5	04FEB09	CMH	PRS	CMH
6	04FEB09	CMH	PRS	CMH
7	04FEB09	CMH	PRS	CMH
8	04FEB09	CMH	PRS	CMH
9	04FEB09	CMH	PRS	CMH
10	04FEB09	CMH	PRS	CMH
11	04FEB09	CMH	PRS	CMH
12	04FEB09	CMH	PRS	CMH
13	04FEB09	CMH	PRS	CMH
14	04FEB09	CMH	PRS	CMH
15	04FEB09	CMH	PRS	CMH
16	04FEB09	CMH	PRS	CMH
17	04FEB09	CMH	PRS	CMH
18	04FEB09	CMH	PRS	CMH
19	04FEB09	CMH	PRS	CMH
20	04FEB09	CMH	PRS	CMH

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		FED. MFG. CODE 91929		CATALOG LISTING	
MICRO SWITCH a Honeywell Division		SWITCH - DOOR INTERLOCK		GK SERIES CHART 4	
DESIGN UNITS		SI METRIC		US CUSTOMARY	
WEIGHT		1,5 kg / 3,3 LB			

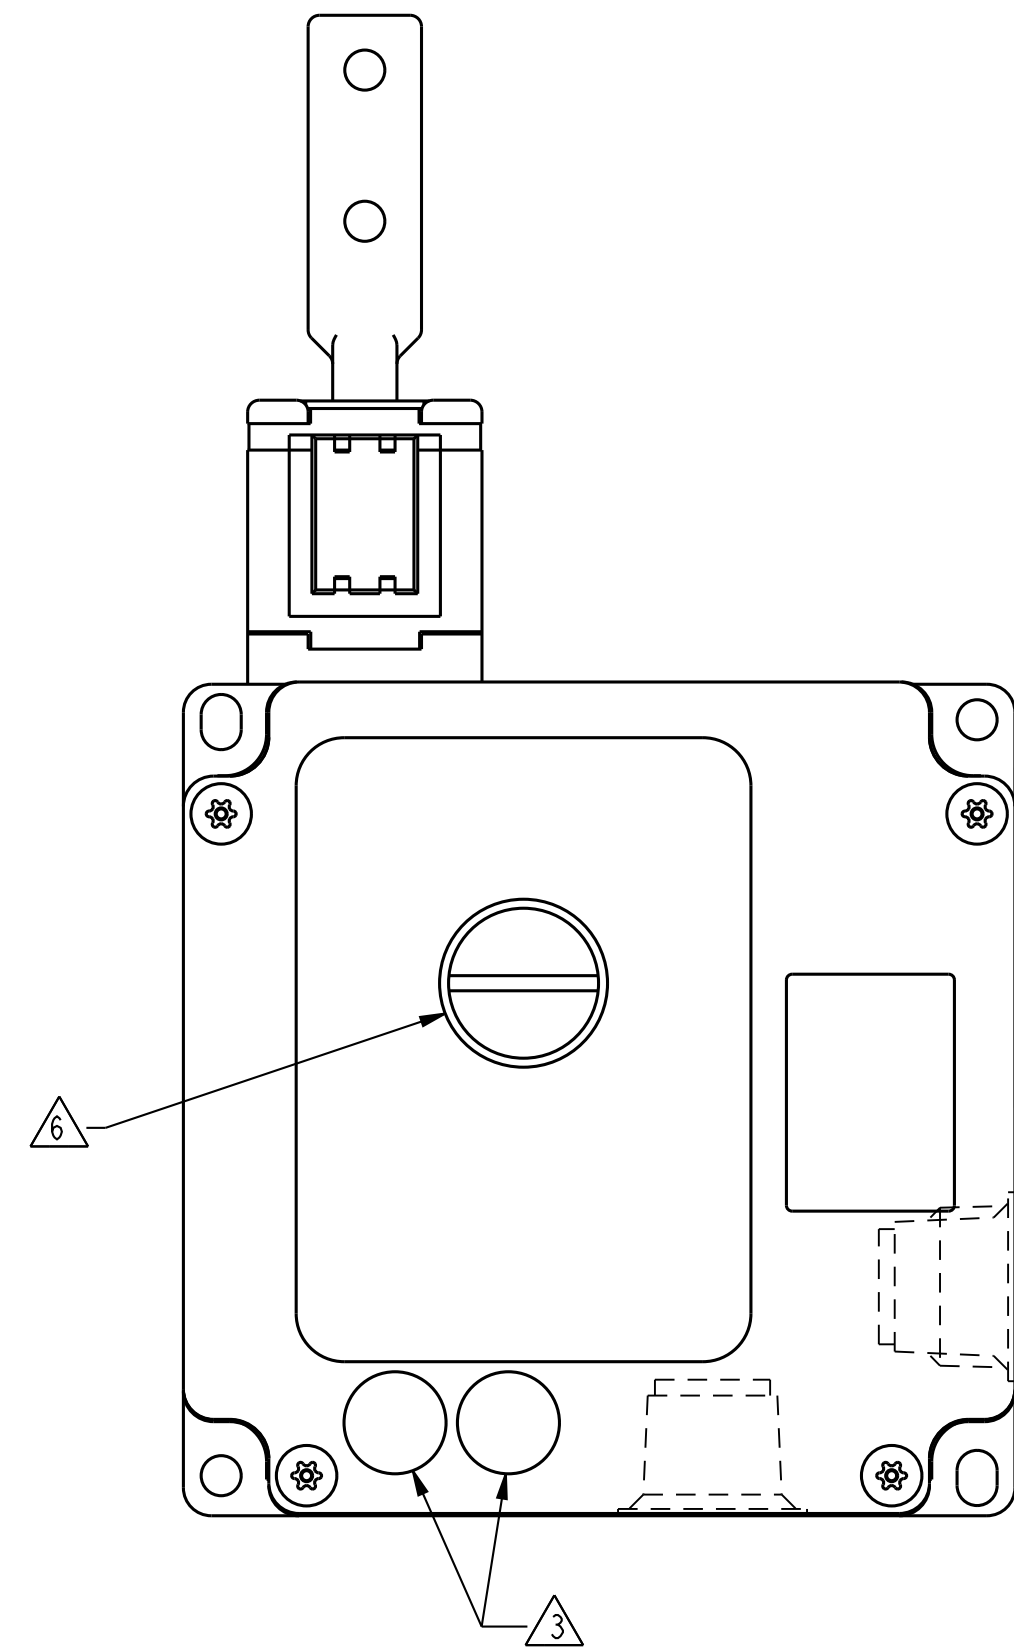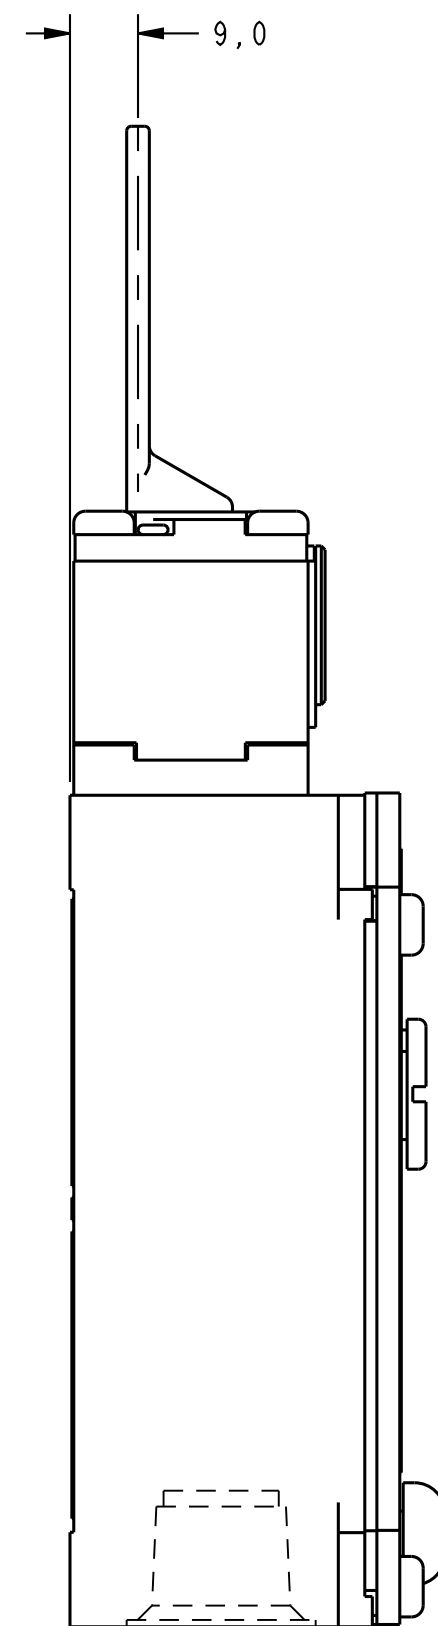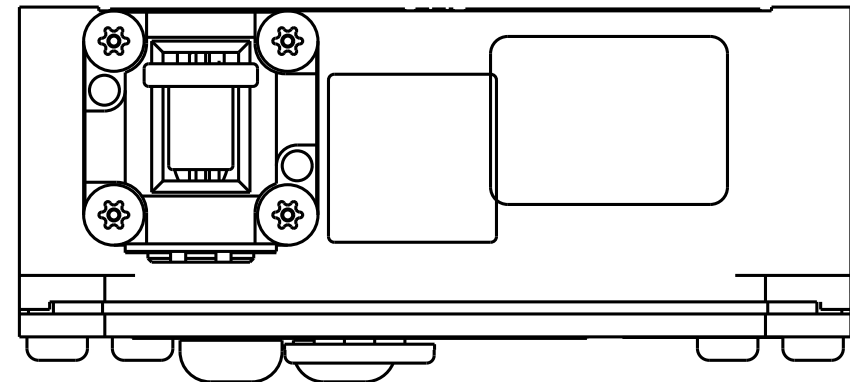


TOP KEY ENTRY

FRONT KEY ENTRY


BODY / INDICATOR CODES L OR F

[illegible]

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table><tr><td>DIM</td><td>TOL</td><td>DIM</td><td>TOL</td></tr><tr><td>"</td><td>"</td><td>"</td><td>"</td></tr><tr><td>NO PLACES</td><td>1 / .04</td><td>1</td><td>0.0003</td></tr><tr><td>ONE PLACE</td><td>1.2</td><td>1.2</td><td>0.0003</td></tr><tr><td>TWO PLACES</td><td>1.2</td><td>1.2</td><td>0.0003</td></tr><tr><td>THREE PLACES</td><td>1.2</td><td>1.2</td><td>0.0003</td></tr><tr><td>ANGLES</td><td>1.2</td><td>1.2</td><td>0.0003</td></tr></table>		DIM	TOL	DIM	TOL	"	"	"	"	NO PLACES	1 / .04	1	0.0003	ONE PLACE	1.2	1.2	0.0003	TWO PLACES	1.2	1.2	0.0003	THREE PLACES	1.2	1.2	0.0003	ANGLES	1.2	1.2	0.0003
DIM	TOL	DIM	TOL																												
"	"	"	"																												
NO PLACES	1 / .04	1	0.0003																												
ONE PLACE	1.2	1.2	0.0003																												
TWO PLACES	1.2	1.2	0.0003																												
THREE PLACES	1.2	1.2	0.0003																												
ANGLES	1.2	1.2	0.0003																												
FED. MFG. CODE 91929	CATALOG LISTING		<table><tr><td>SI METRIC</td><td>US CUSTOMARY</td></tr><tr><td>☒</td><td>☐</td></tr></table>	SI METRIC	US CUSTOMARY	☒	☐																								
SI METRIC	US CUSTOMARY																														
☒	☐																														
 MICROSWITCH a Honeywell Division	SWITCH - DOOR INTERLOCK	GK SERIES CHART 4	DESIGN UNITS ☒																												
			WEIGHT 1.5 kg / 3.2 lb																												


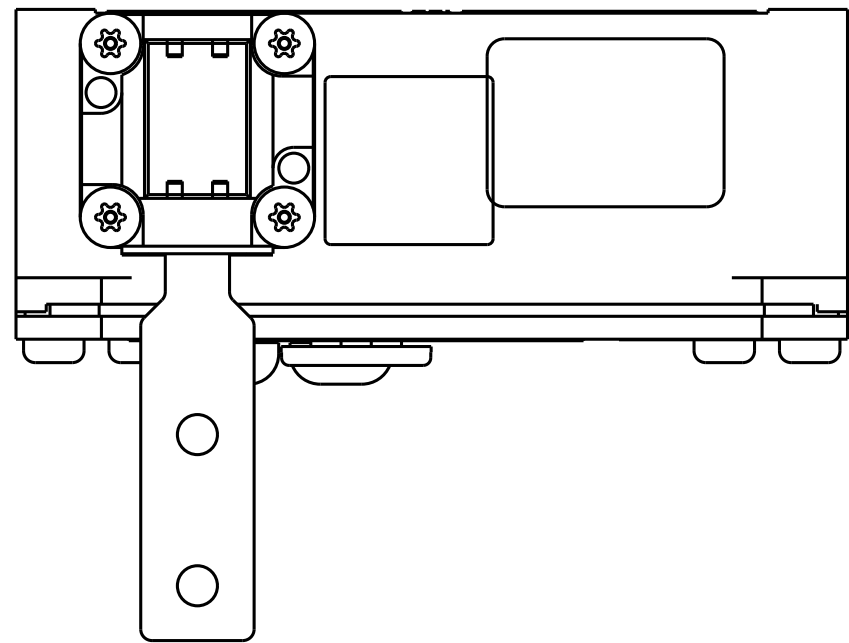


WITH KEY IN FRONT ENTRY POSITION

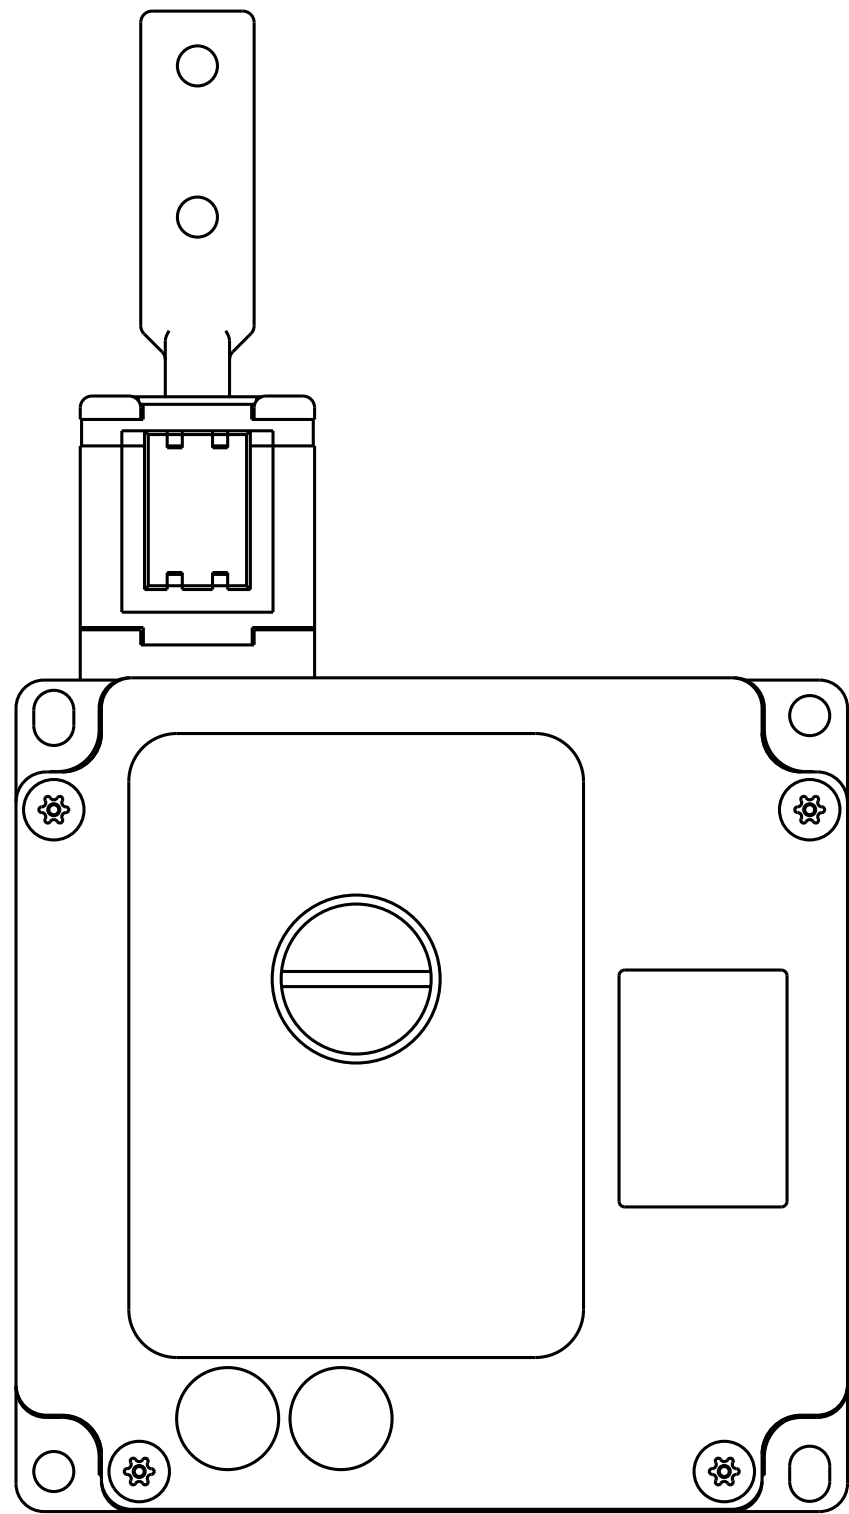


WITH KEY IN TOP ENTRY POSITION

HEAD CODE L

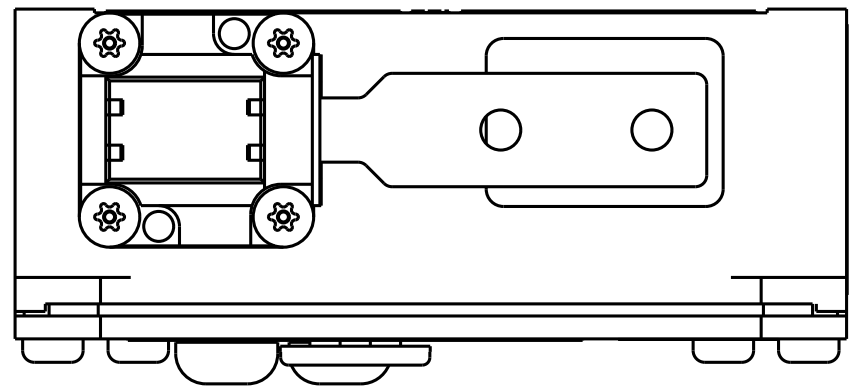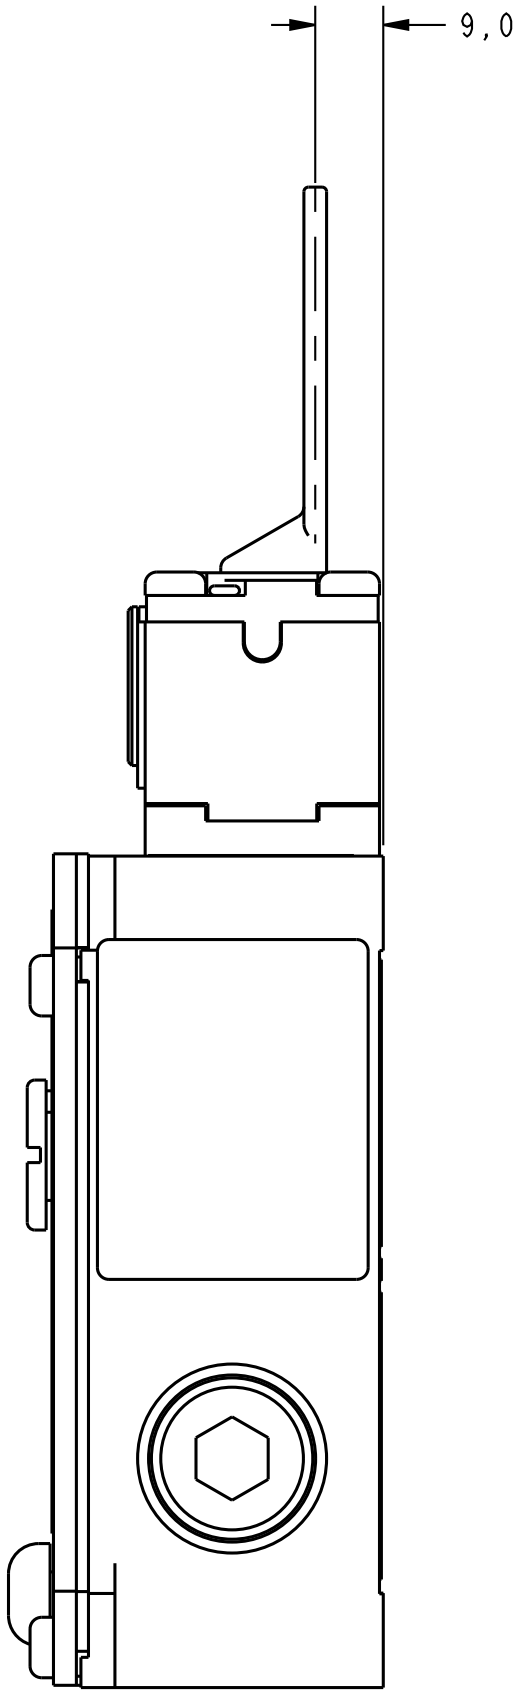



WITH KEY IN FRONT ENTRY POSITION

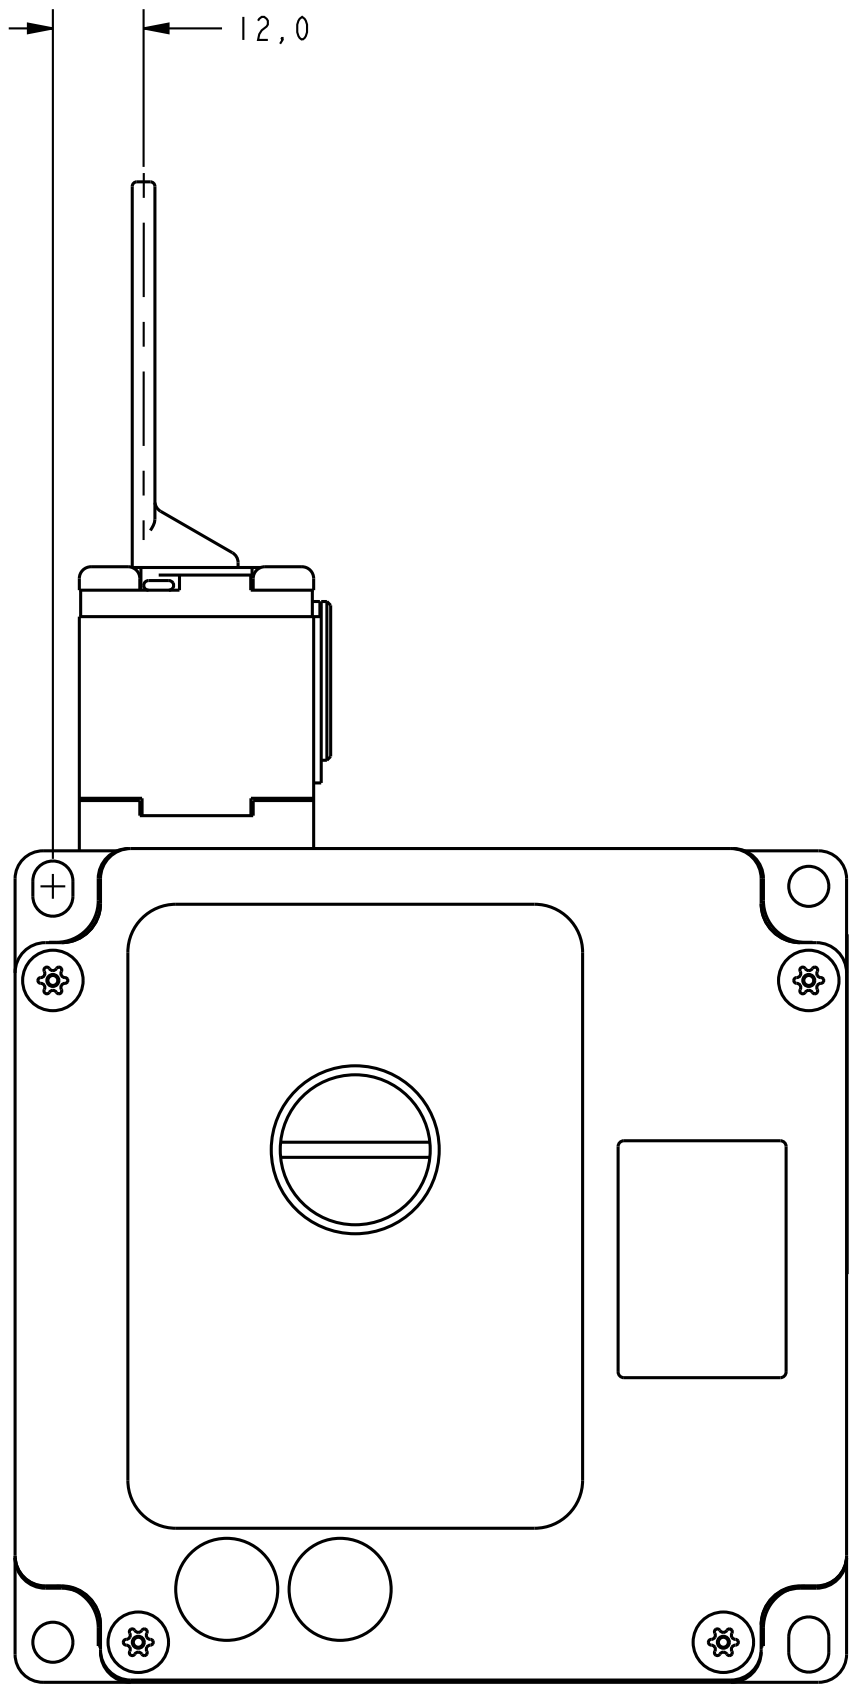


WITH KEY IN TOP ENTRY POSITION

HEAD CODE M

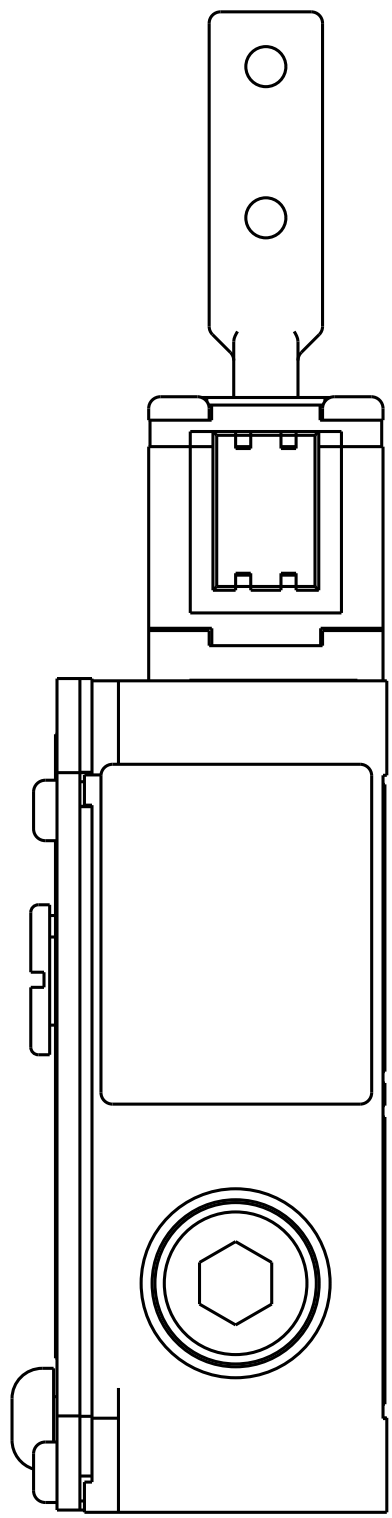

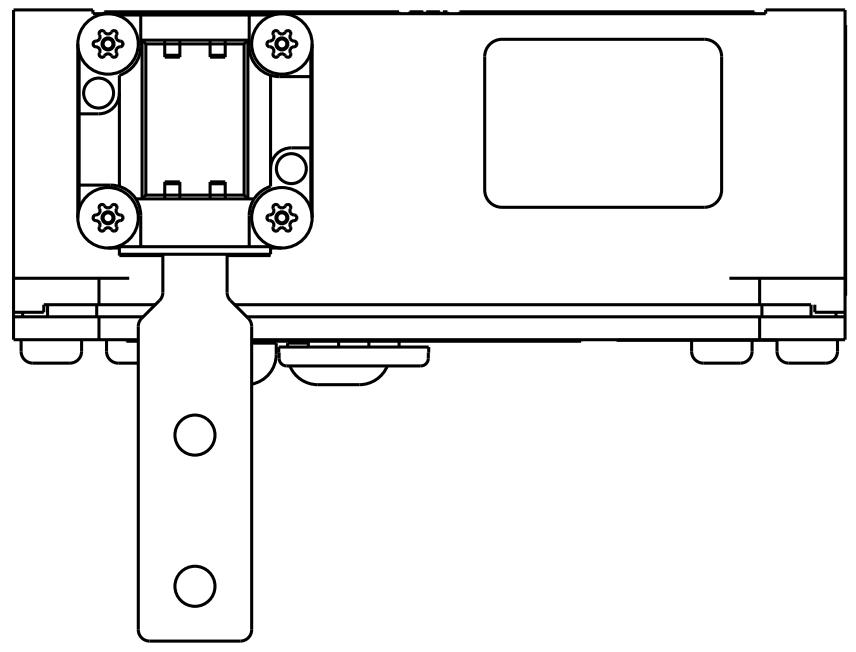


WITH KEY IN FRONT ENTRY POSITION

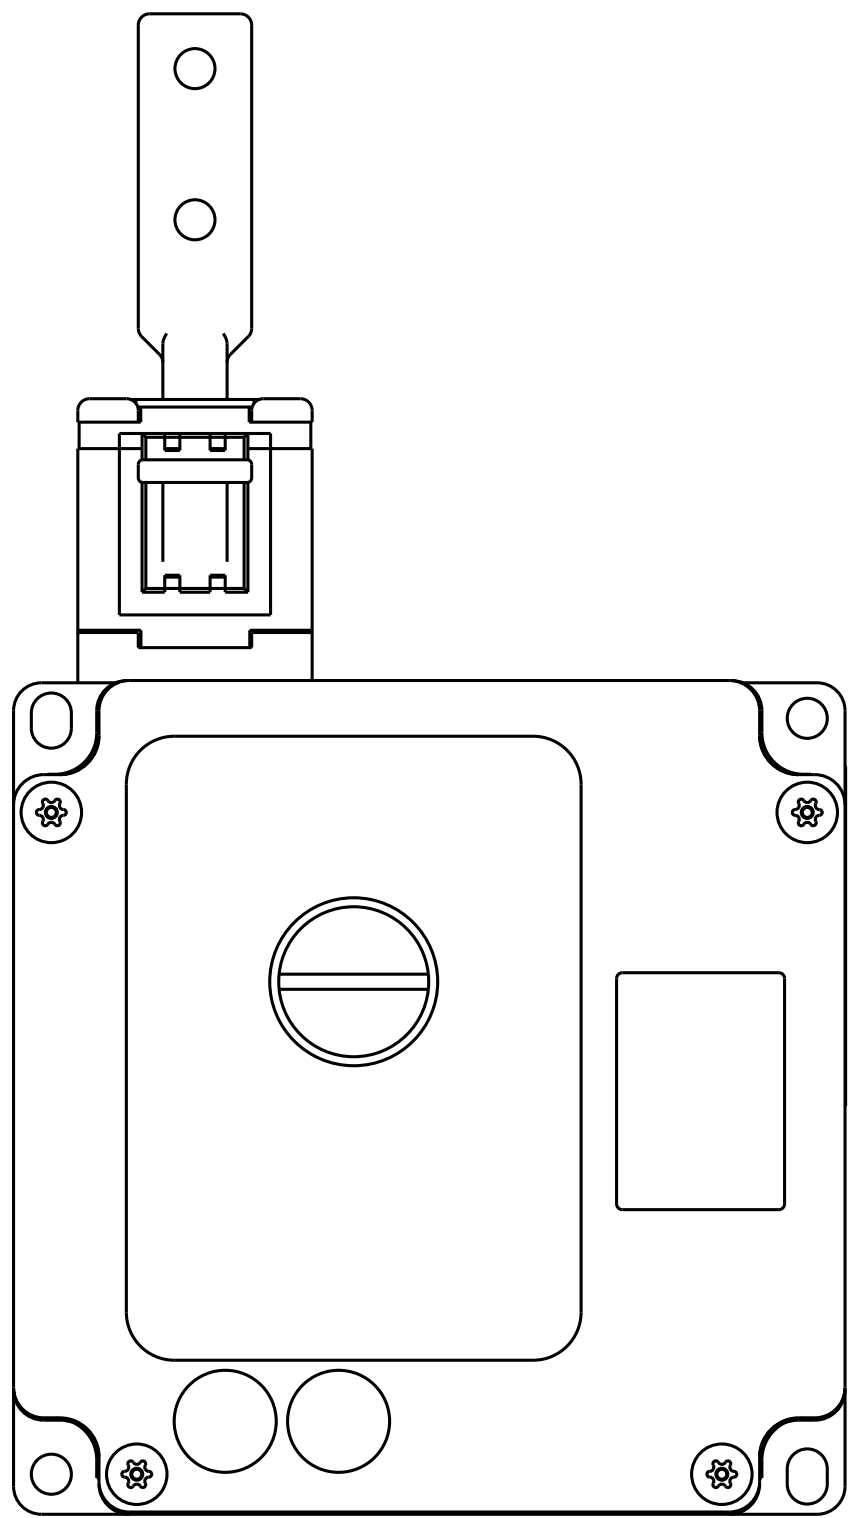


WITH KEY IN TOP ENTRY POSITION

HEAD CODE N

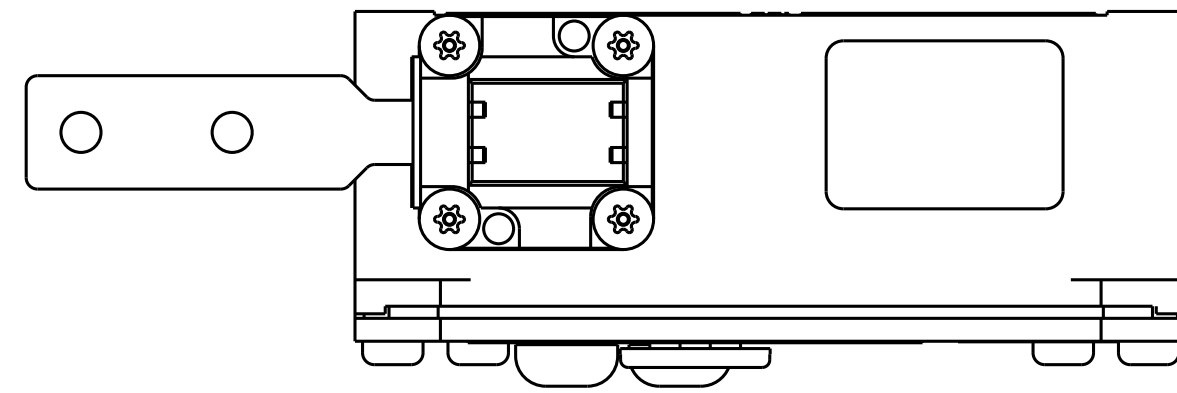

WITH KEY IN FRONT ENTRY POSITION

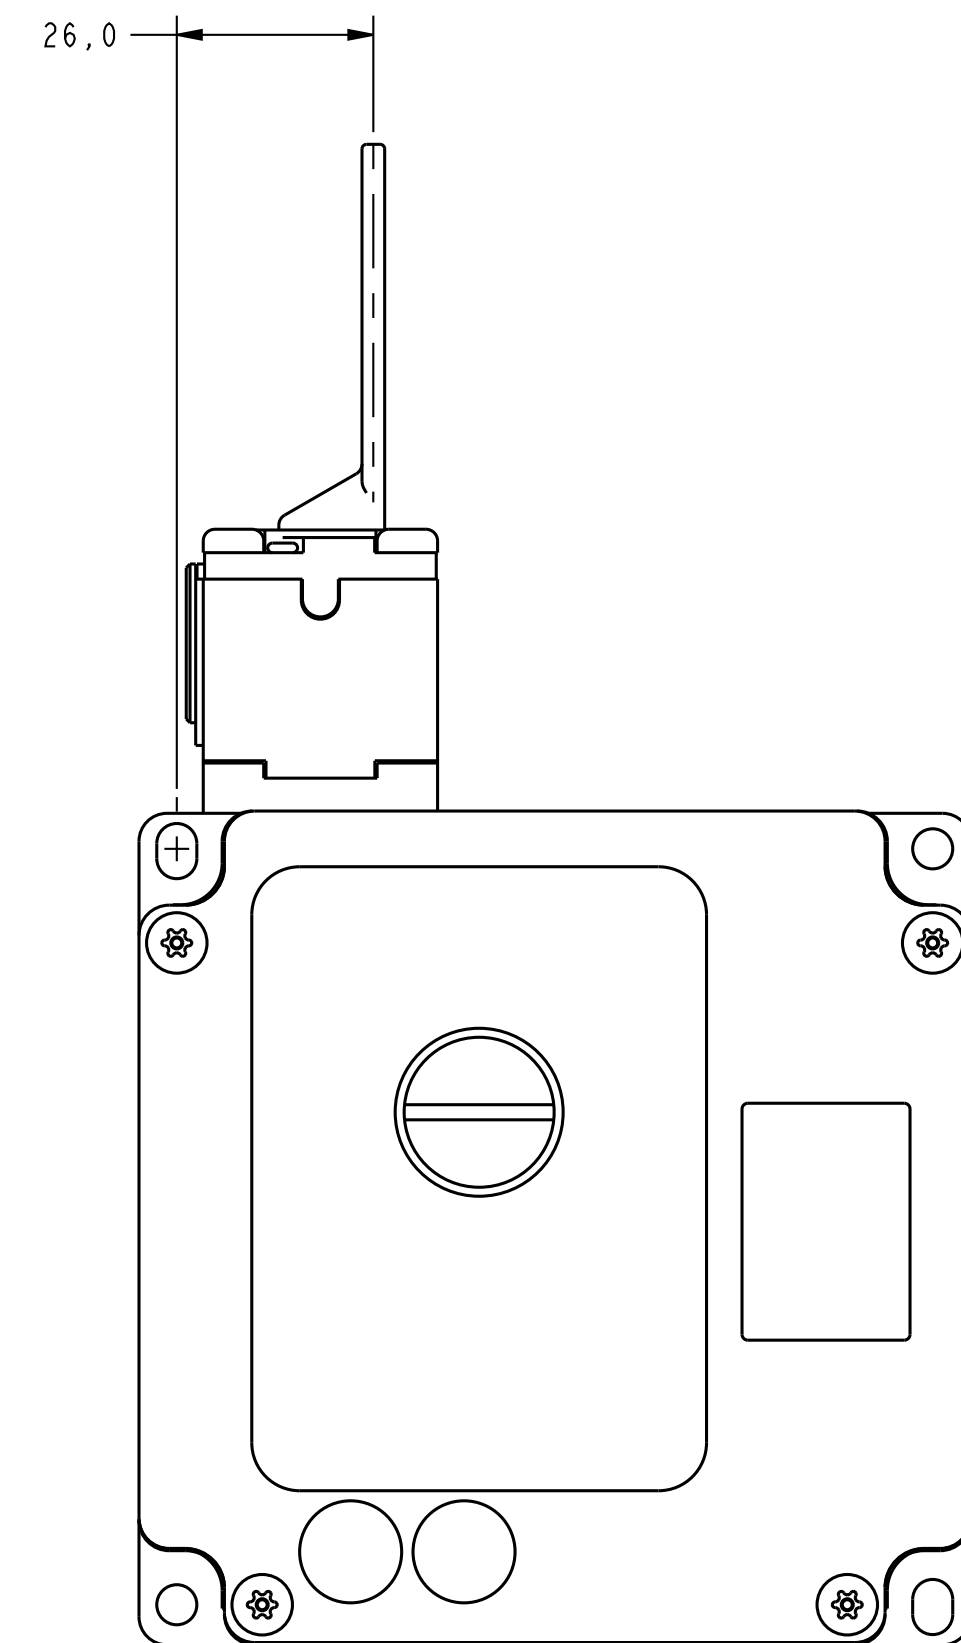








WITH KEY IN TOP ENTRY POSITION

HEAD CODE P

[illegible]

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table><tr><td>FIN.</td><td>TOL.</td><td>FIN.</td><td>TOL.</td></tr><tr><td>"</td><td>"</td><td>"</td><td>"</td></tr><tr><td>NO PLACES</td><td>2</td><td>1.04</td><td>0.01</td></tr><tr><td>ONE PLACE</td><td>2.4</td><td>0.41</td><td>0.015</td></tr><tr><td>TWO PLACES</td><td>1.4</td><td>0.157</td><td>0.006</td></tr><tr><td>THREE PLACES</td><td></td><td></td><td></td></tr><tr><td>ANGLES</td><td></td><td></td><td></td></tr></table>		FIN.	TOL.	FIN.	TOL.	"	"	"	"	NO PLACES	2	1.04	0.01	ONE PLACE	2.4	0.41	0.015	TWO PLACES	1.4	0.157	0.006	THREE PLACES				ANGLES			
FIN.	TOL.	FIN.	TOL.																												
"	"	"	"																												
NO PLACES	2	1.04	0.01																												
ONE PLACE	2.4	0.41	0.015																												
TWO PLACES	1.4	0.157	0.006																												
THREE PLACES																															
ANGLES																															
FED. MFG. CODE 91929	CATALOG LISTING																														
MICRO SWITCH a Honeywell Division	SWITCH - DOOR INTERLOCK	GK SERIES CHART 4	<table><tr><td>DESIGN UNITS</td><td><table><tr><td>SI METRIC</td><td>US CUSTOMARY</td></tr><tr><td>☒</td><td>☐</td></tr></table></td></tr><tr><td colspan="2">WEIGHT 1.5 KC / 2.2 LB</td></tr></table>	DESIGN UNITS	<table><tr><td>SI METRIC</td><td>US CUSTOMARY</td></tr><tr><td>☒</td><td>☐</td></tr></table>	SI METRIC	US CUSTOMARY	☒	☐	WEIGHT 1.5 KC / 2.2 LB																					
DESIGN UNITS	<table><tr><td>SI METRIC</td><td>US CUSTOMARY</td></tr><tr><td>☒</td><td>☐</td></tr></table>	SI METRIC	US CUSTOMARY	☒	☐																										
SI METRIC	US CUSTOMARY																														
☒	☐																														
WEIGHT 1.5 KC / 2.2 LB																															

KEY CODE 6

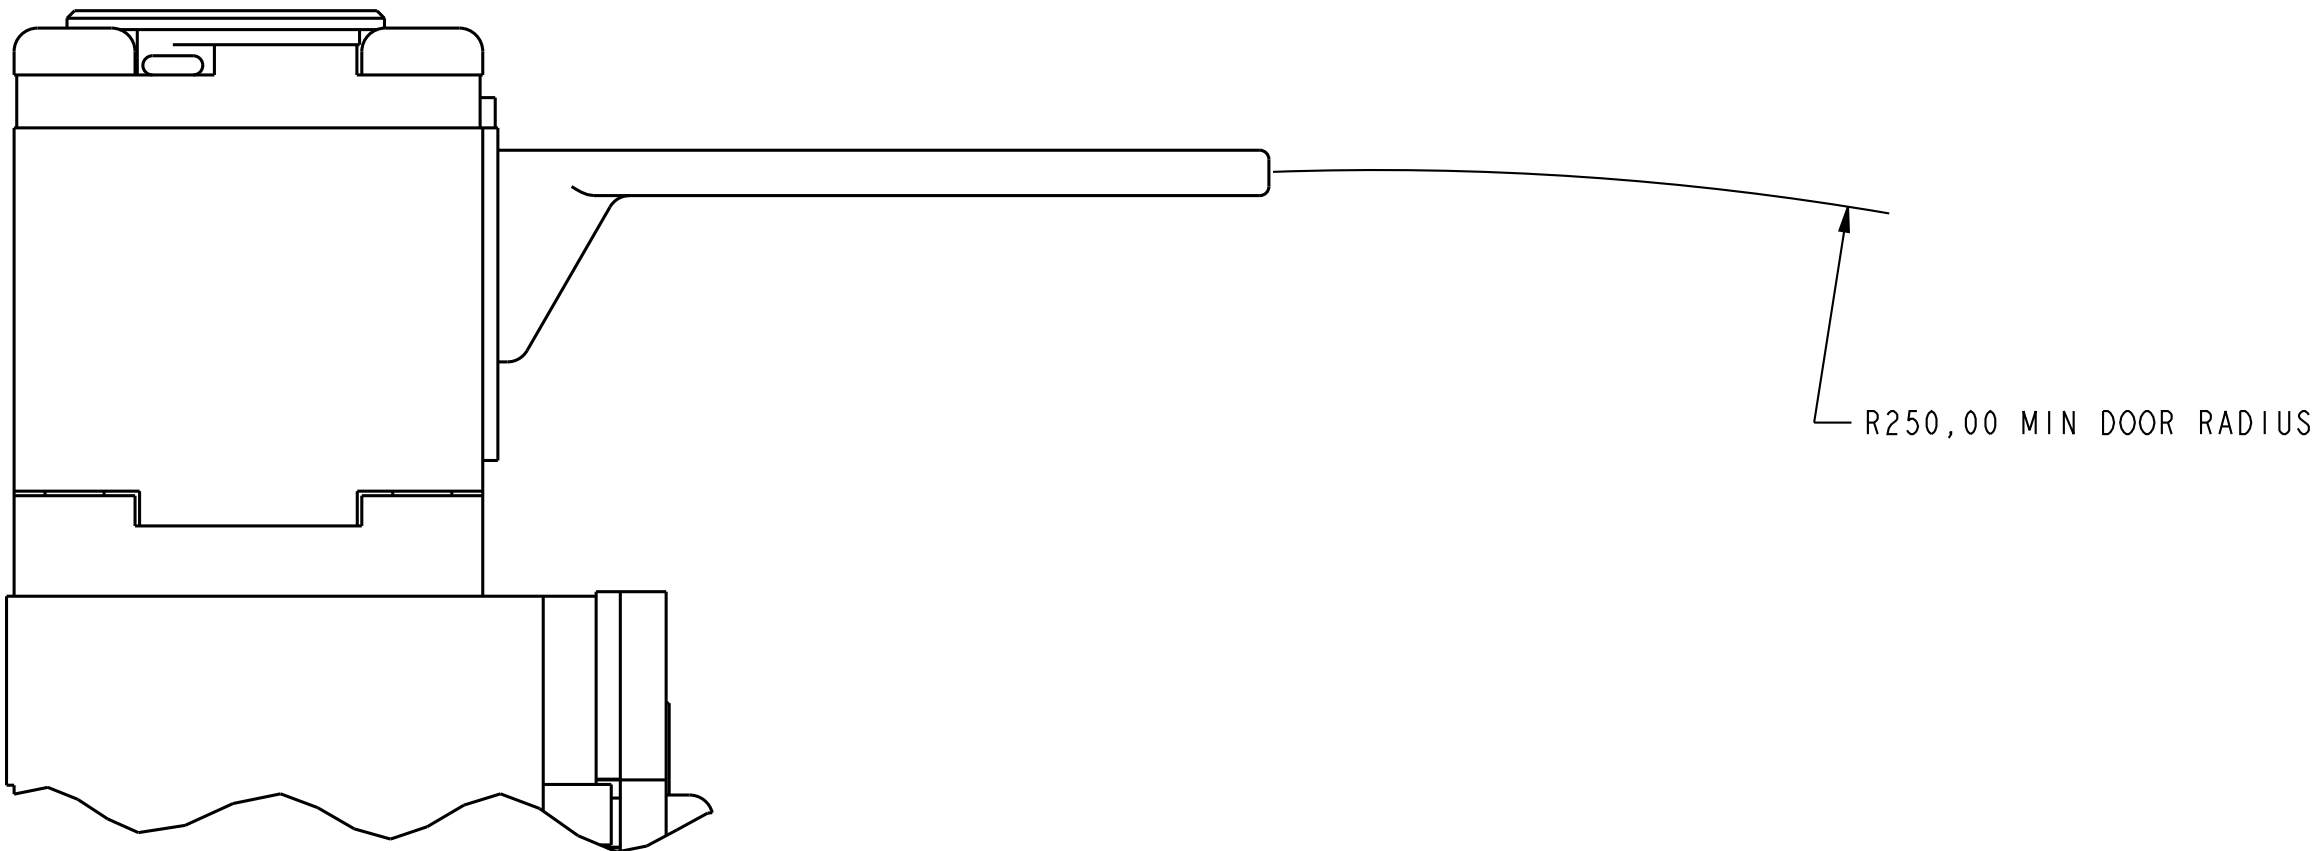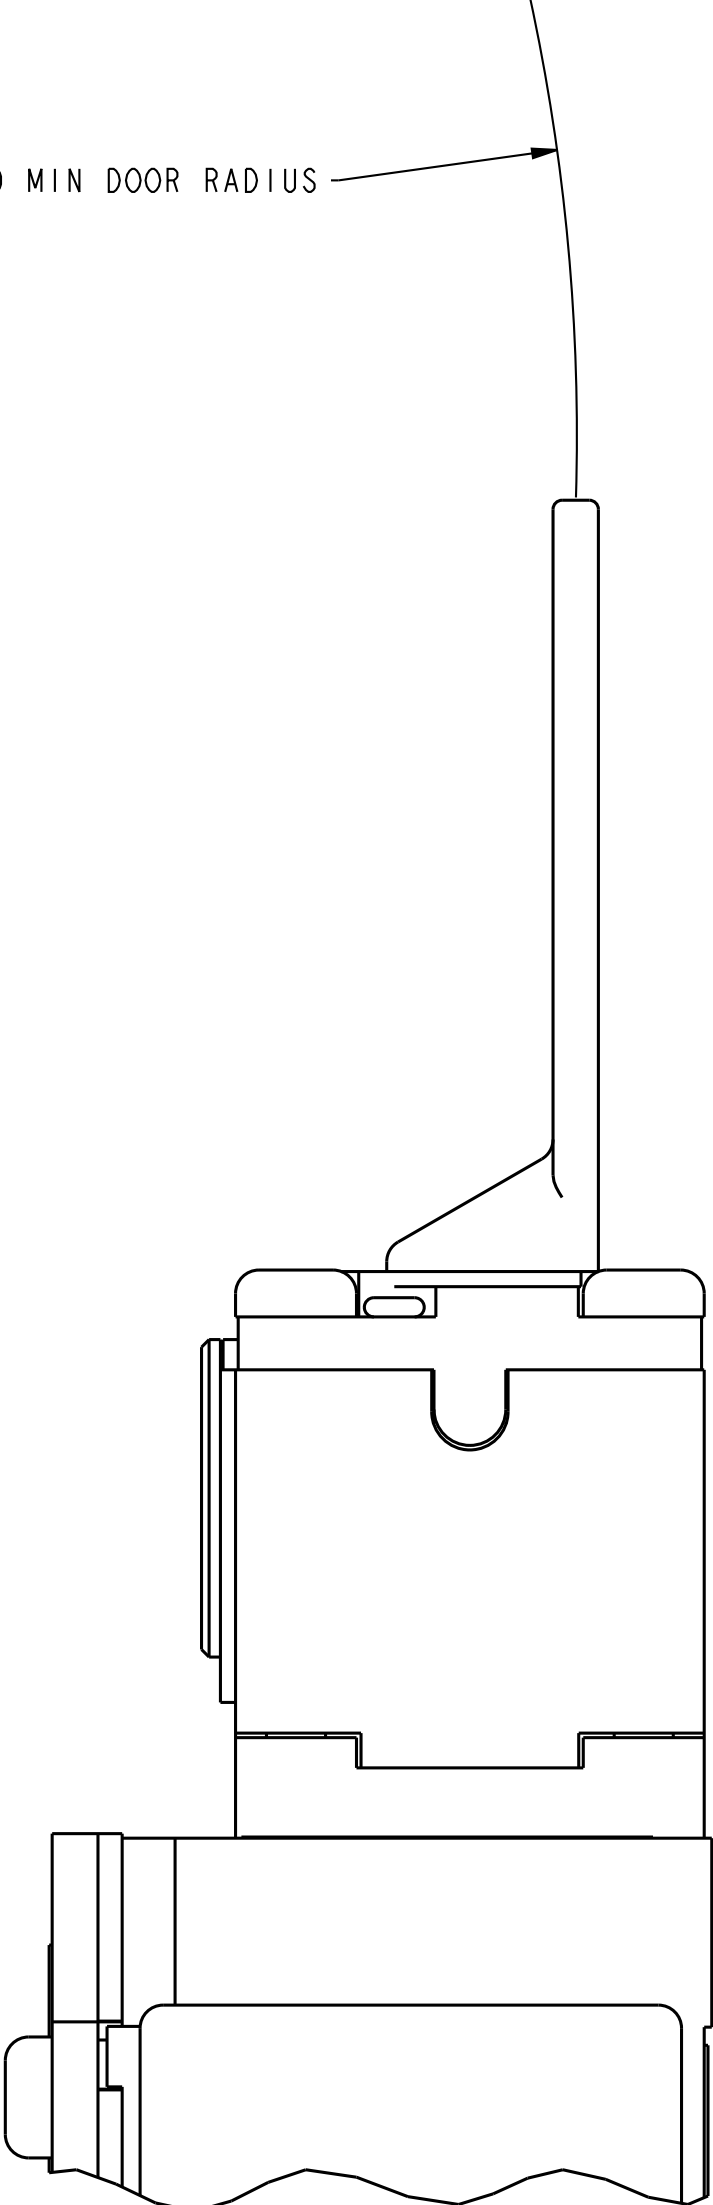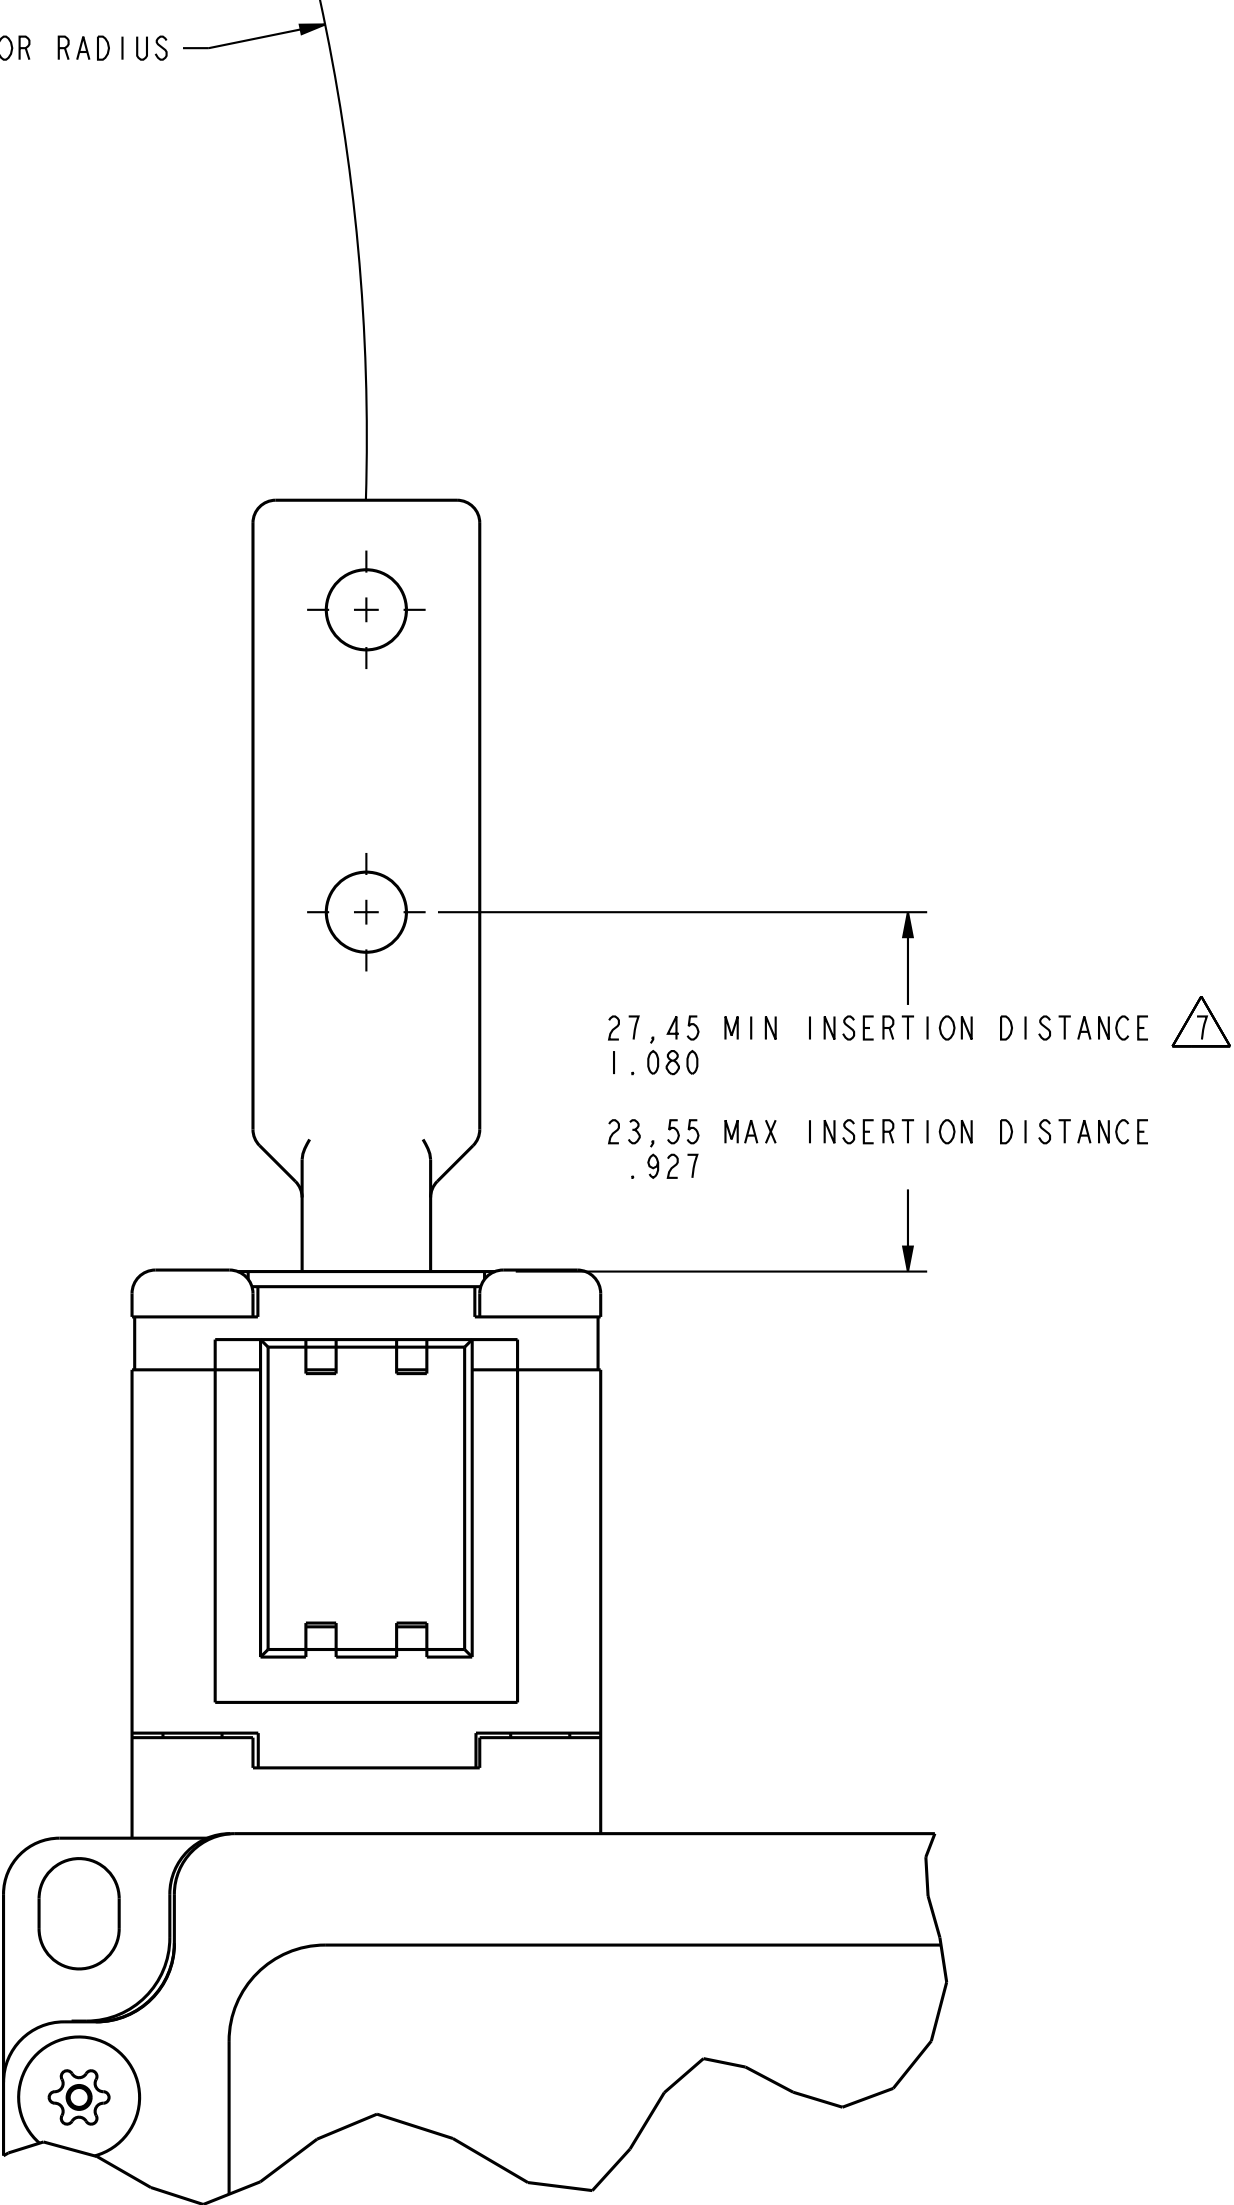
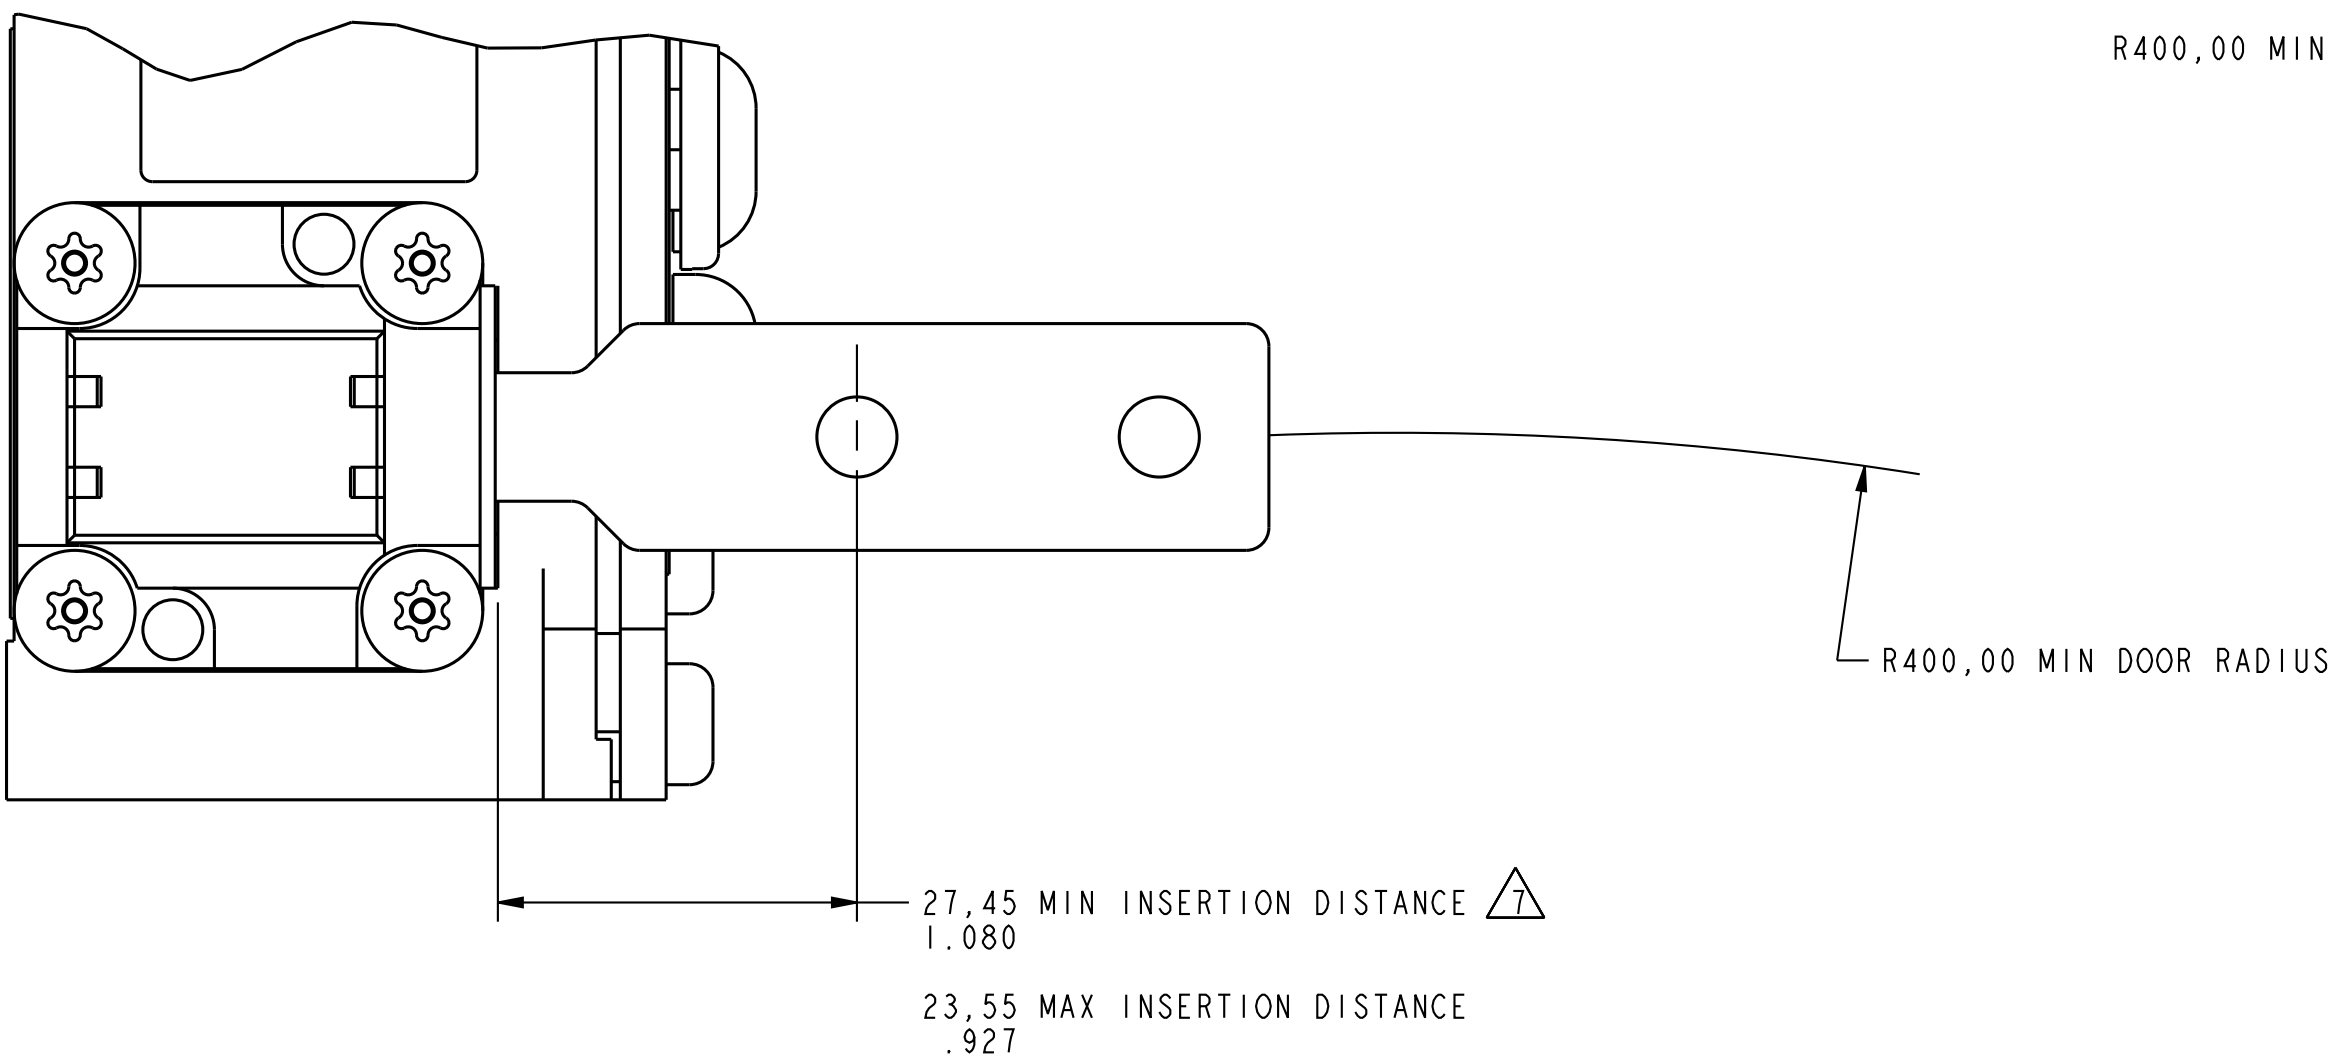
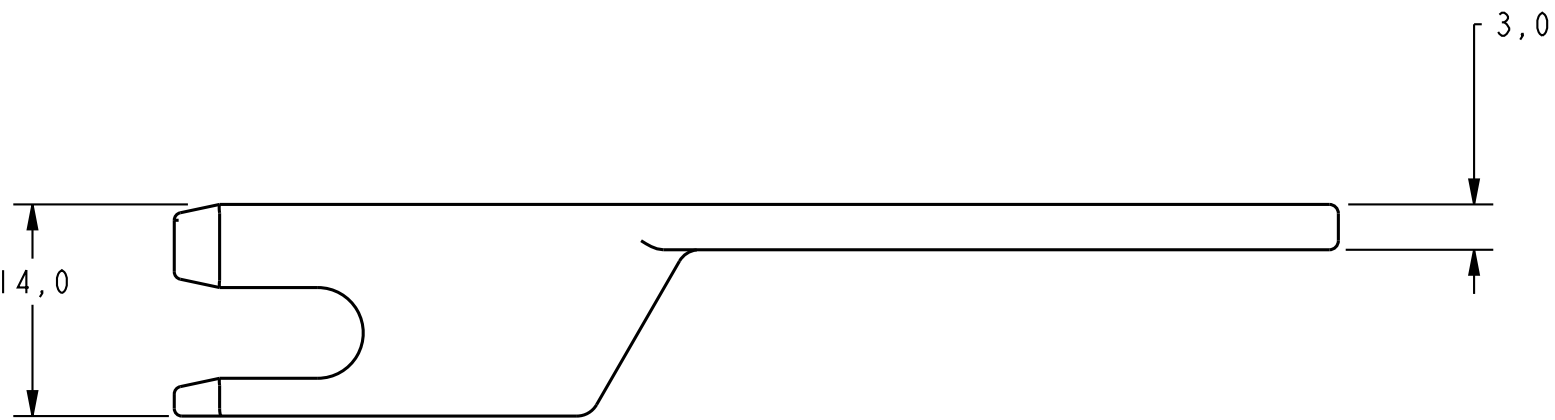

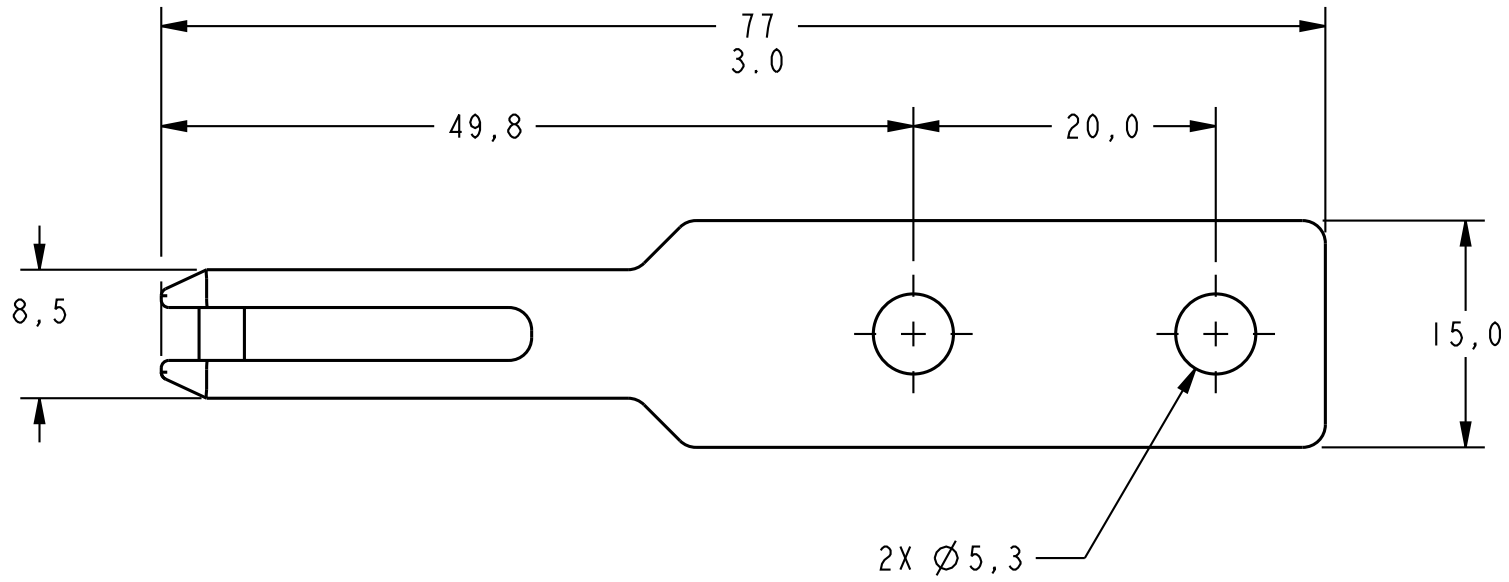


FRONT KEY ENTRY

TOP KEY ENTRY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.				CATALOG LISTING			
FED. MFG. CODE 91929		MICRO SWITCH a Honeywell Division		SWITCH - DOOR INTERLOCK		GK SERIES CHART 4	
DESIGN UNITS		SI METRIC		US CUSTOMARY		WEIGHT 1.5 KG / 3.3 LB	
NO PLACES		TOL.		TOL.		TOL.	
ONE PLACE		0.125		0.005		0.005	
TWO PLACES		0.005		0.005		0.005	
THREE PLACES		0.005		0.005		0.005	
ANGLES		0.125		0.005		0.005	

KEY CODE 7

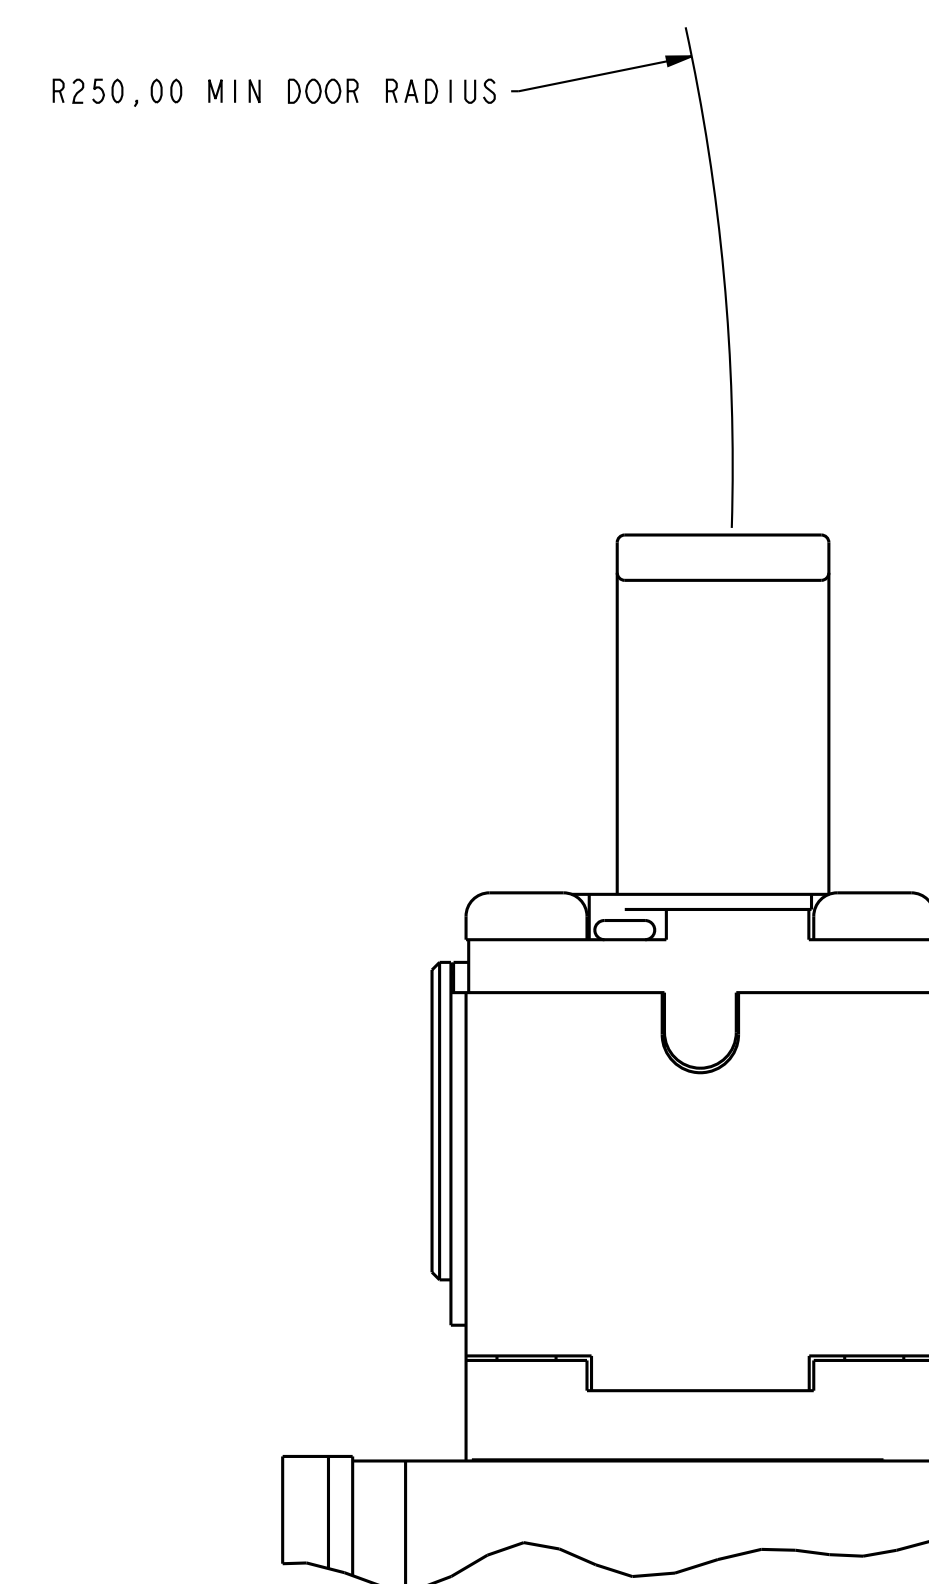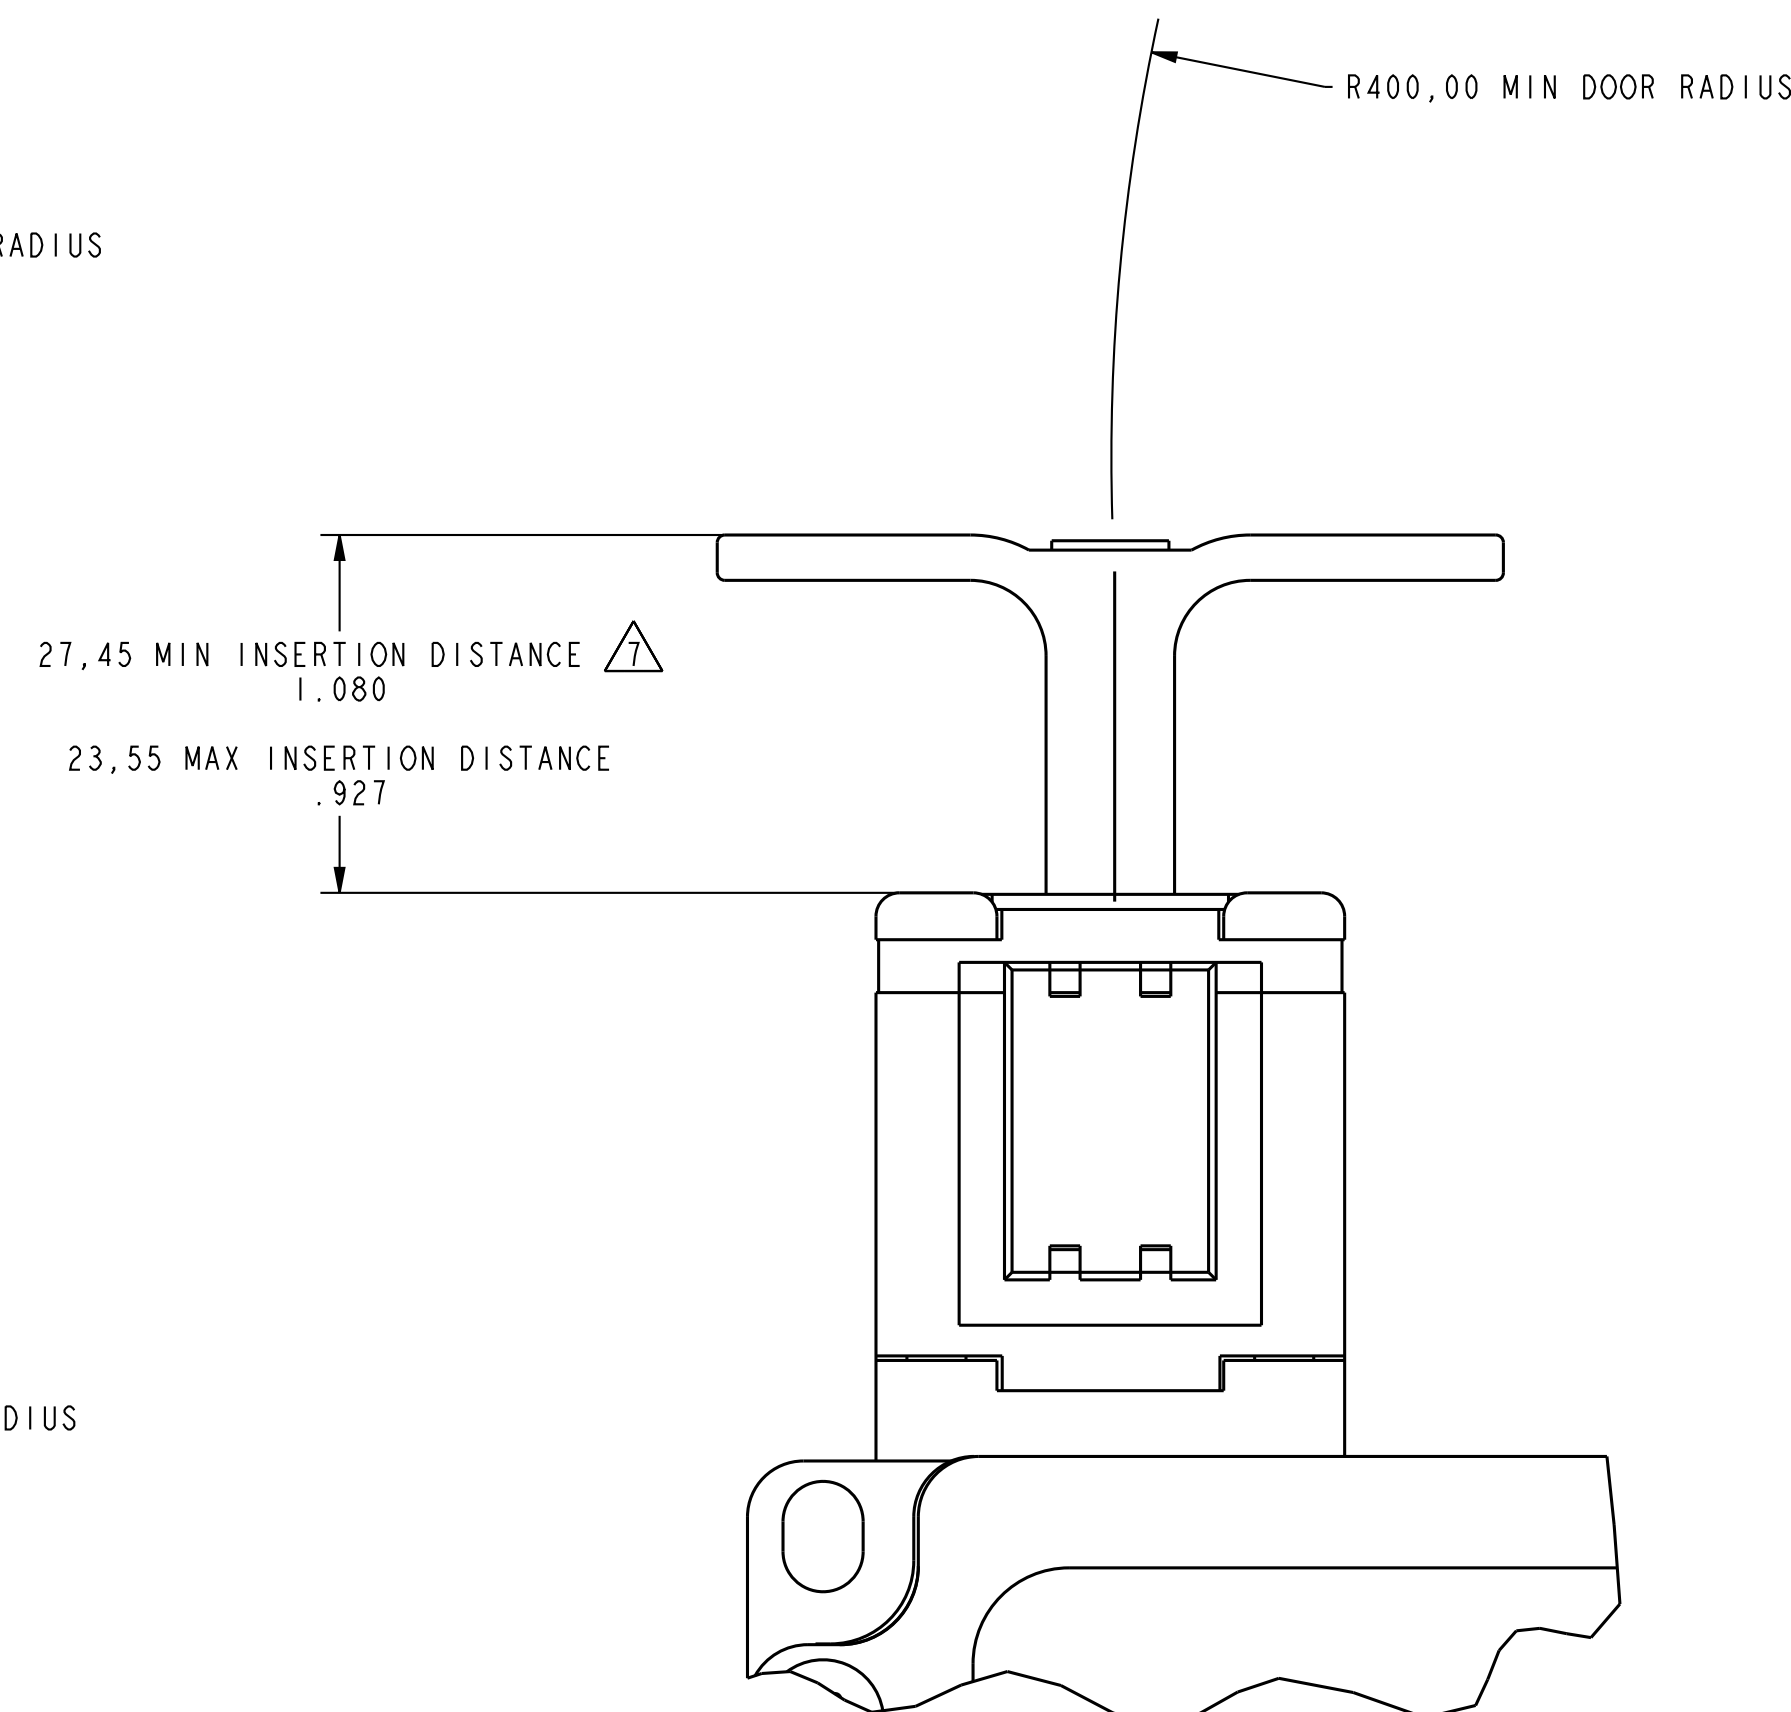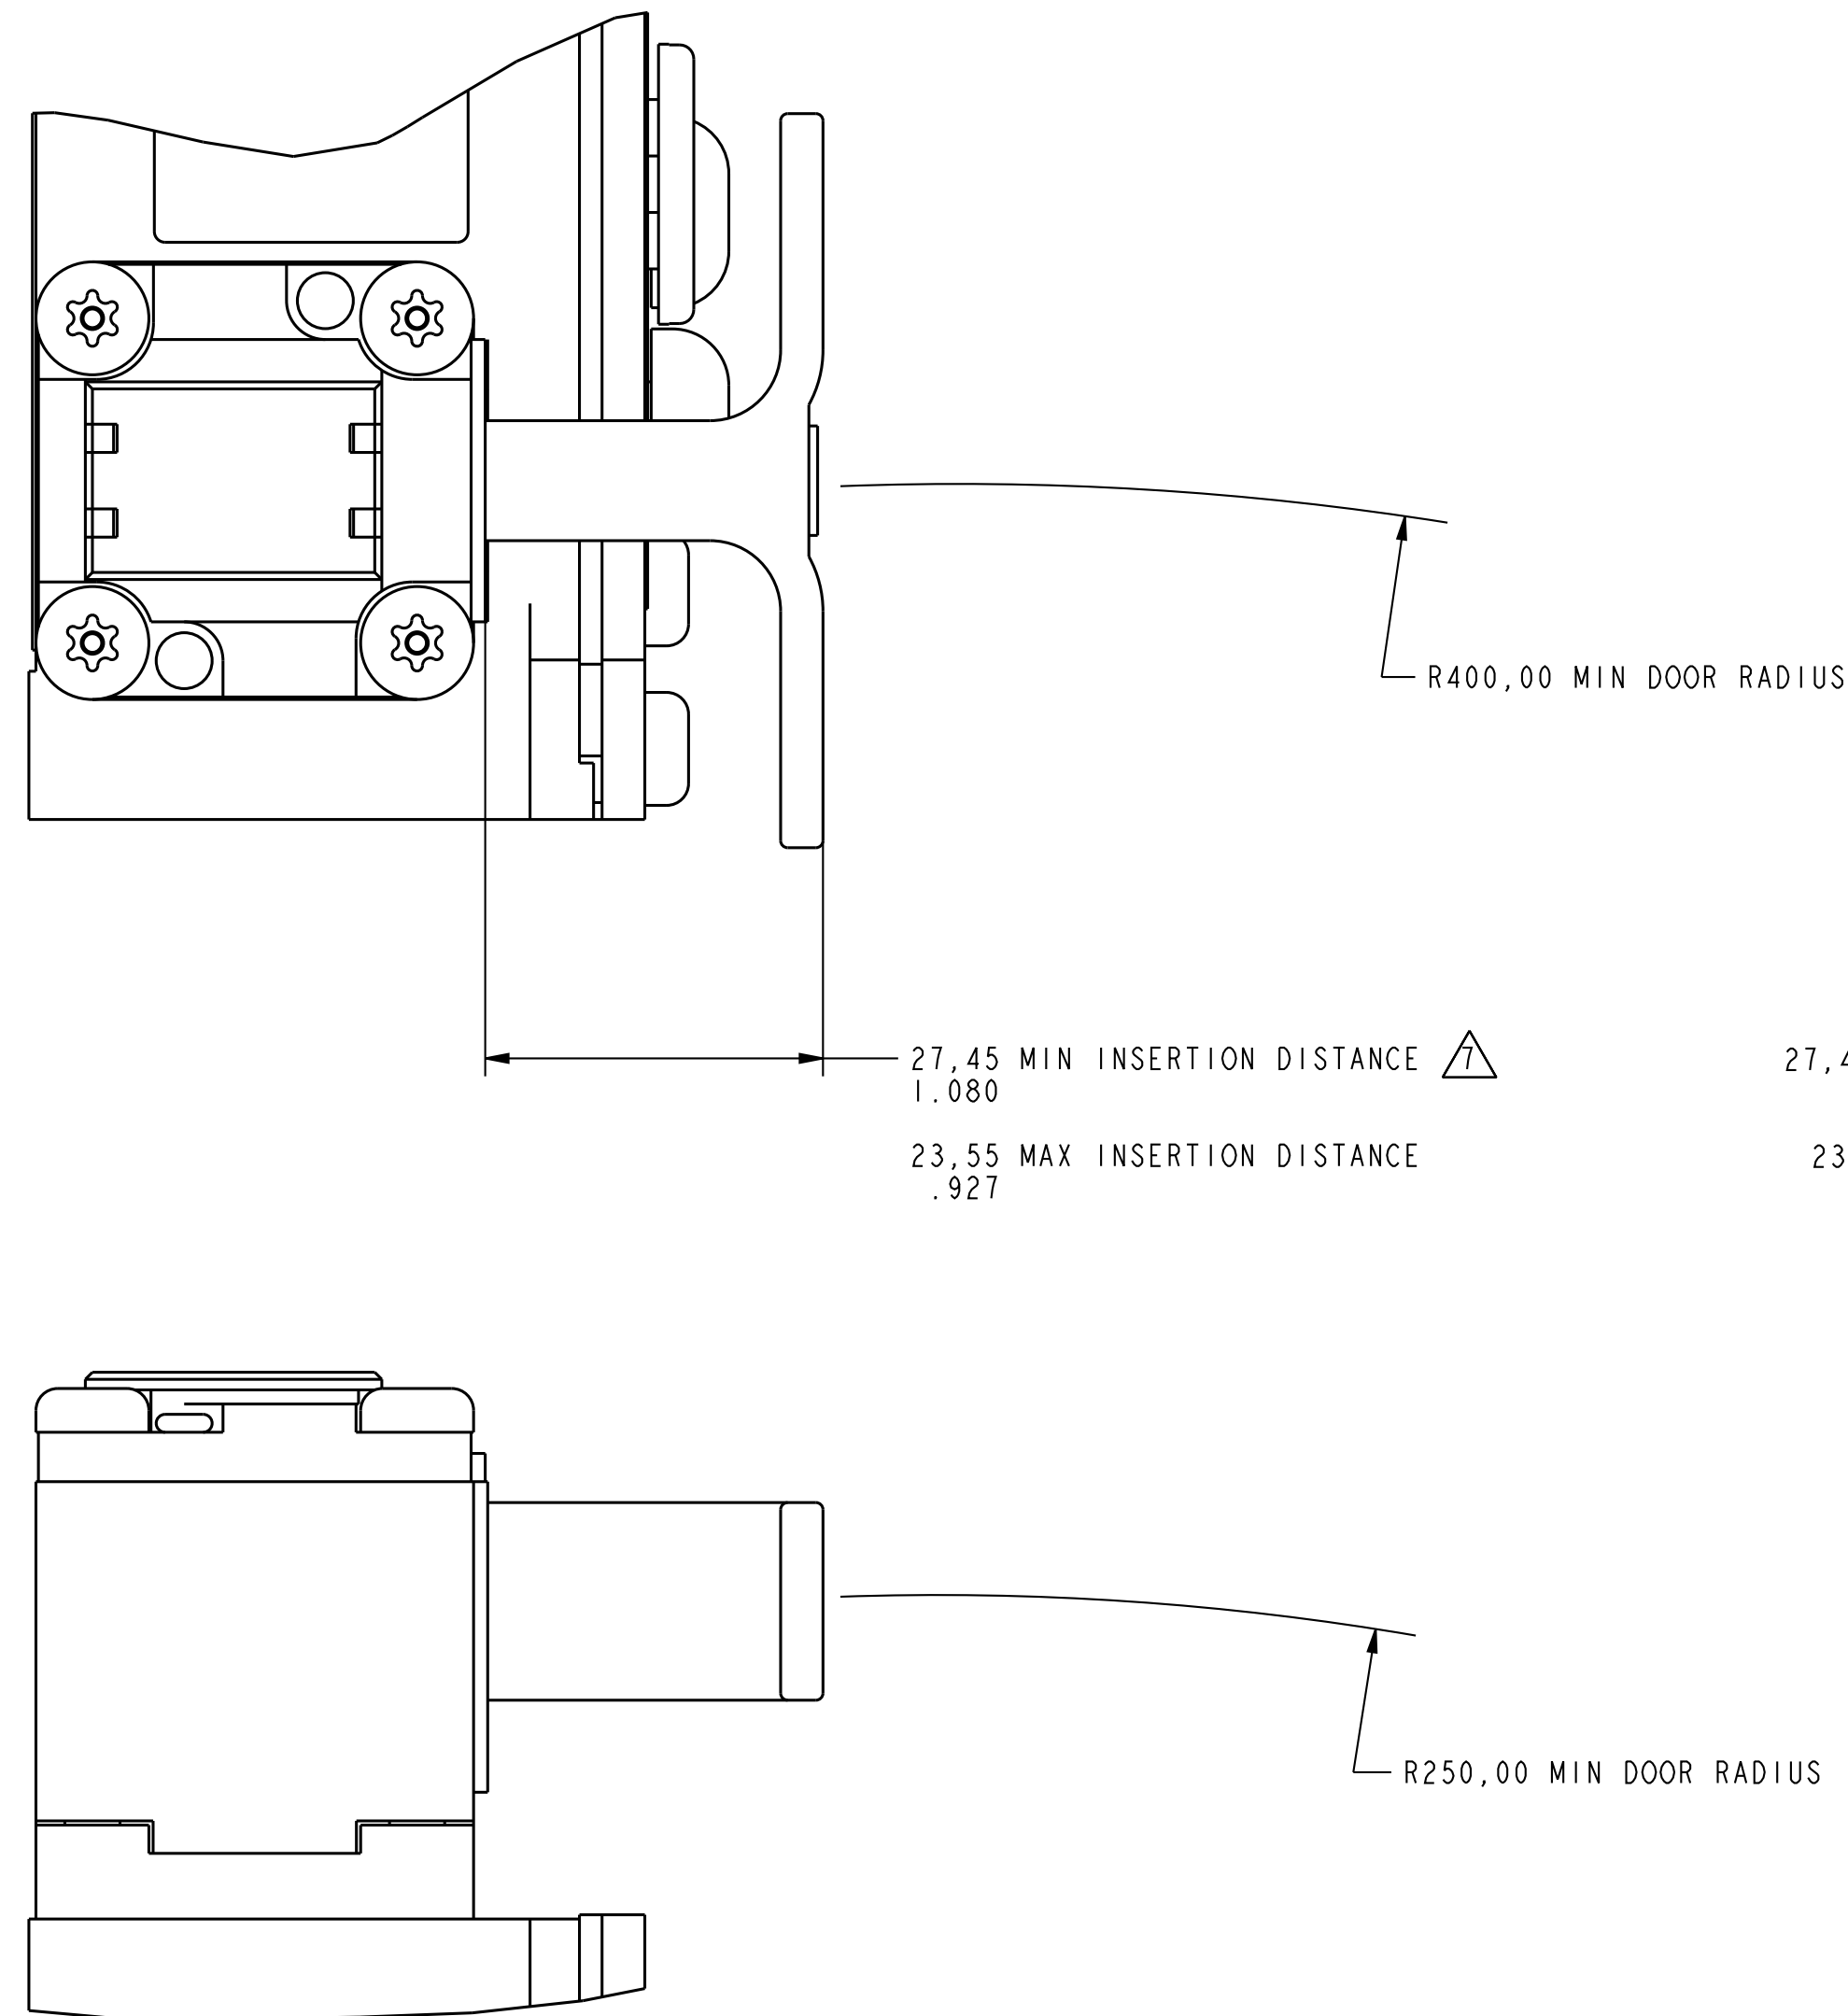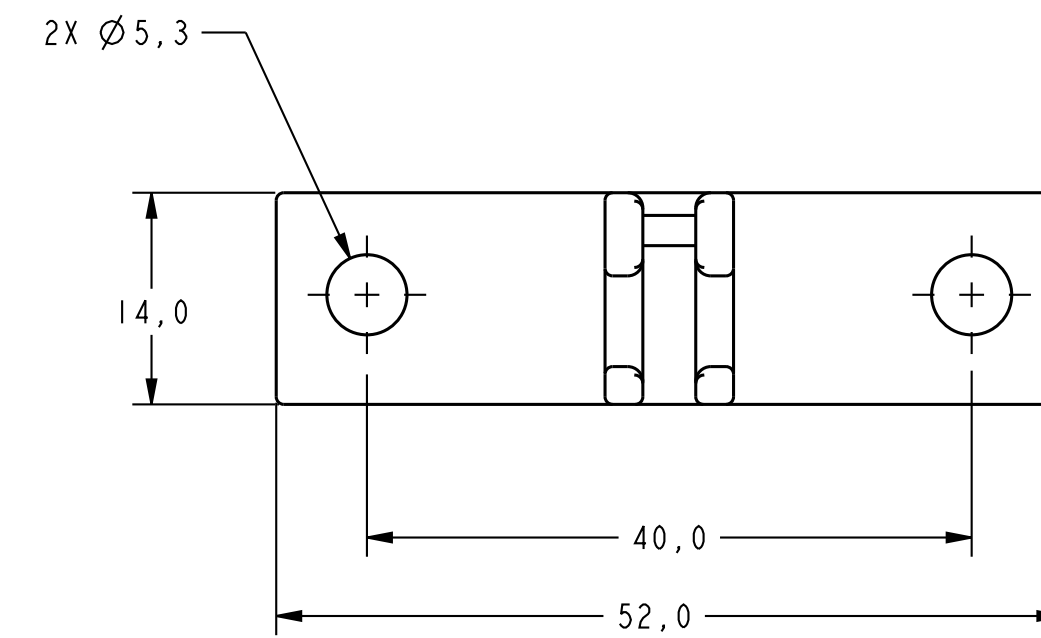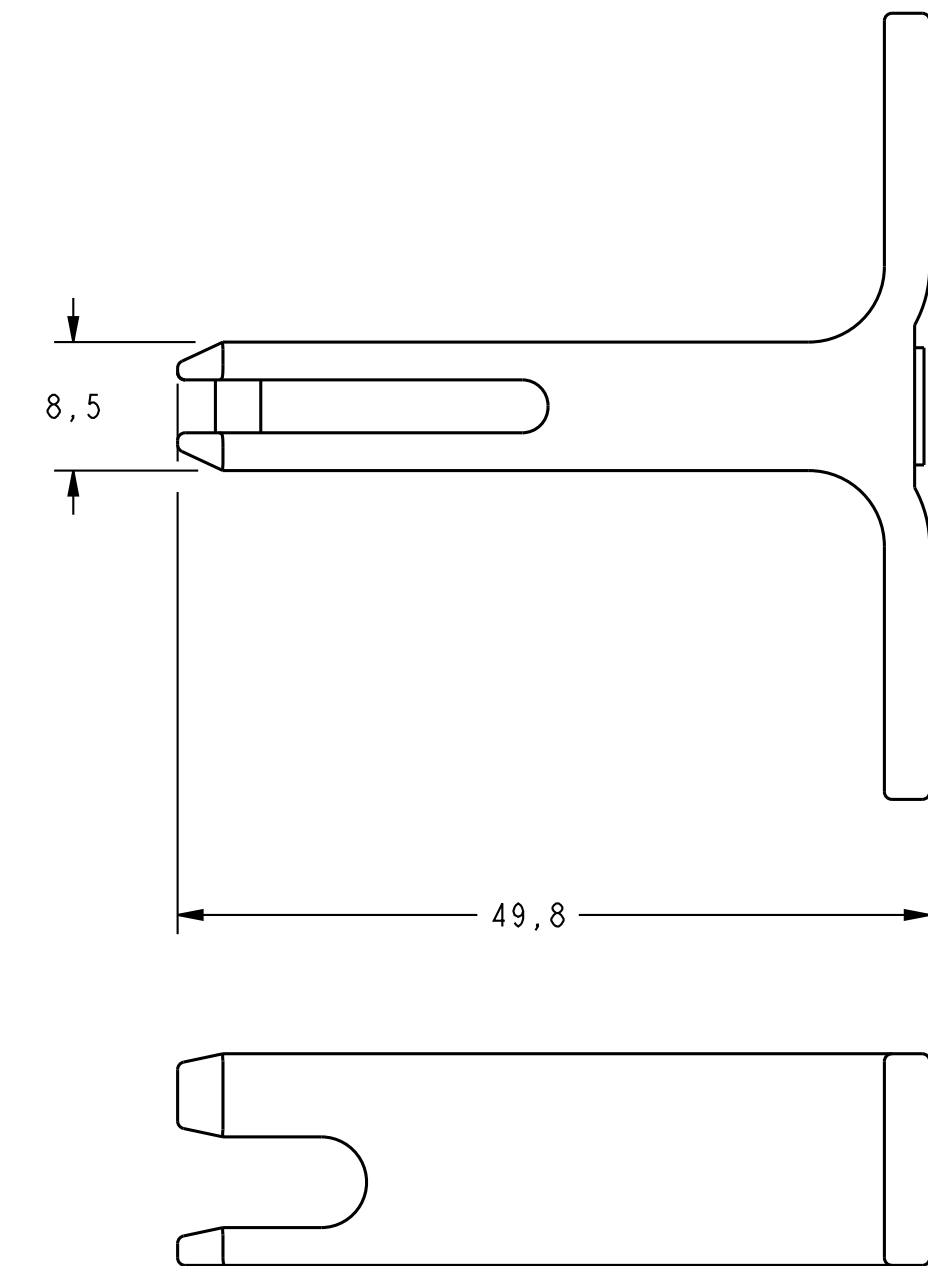


FRONT KEY ENTRY

TOP KEY ENTRY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			
FED. MFG. CODE 91929		CATALOG LISTING	
 MICRO SWITCH a Honeywell Division		SWITCH - DOOR INTERLOCK	
		GK SERIES CHART 4	
		NO PLACES 2 ONE PLACE 3 TWO PLACES 4 THREE PLACES 5 ANGLES 6	
		DIM. #1 TOL. #1 DIM. #2 TOL. #2 DIM. #3 TOL. #3 DIM. #4 TOL. #4 DIM. #5 TOL. #5 DIM. #6 TOL. #6 DIM. #7 TOL. #7 DIM. #8 TOL. #8 DIM. #9 TOL. #9 DIM. #10 TOL. #10 DIM. #11 TOL. #11 DIM. #12 TOL. #12 DIM. #13 TOL. #13 DIM. #14 TOL. #14 DIM. #15 TOL. #15 DIM. #16 TOL. #16 DIM. #17 TOL. #17 DIM. #18 TOL. #18 DIM. #19 TOL. #19 DIM. #20 TOL. #20 DIM. #21 TOL. #21 DIM. #22 TOL. #22 DIM. #23 TOL. #23 DIM. #24 TOL. #24 DIM. #25 TOL. #25 DIM. #26 TOL. #26 DIM. #27 TOL. #27 DIM. #28 TOL. #28 DIM. #29 TOL. #29 DIM. #30 TOL. #30 DIM. #31 TOL. #31 DIM. #32 TOL. #32 DIM. #33 TOL. #33 DIM. #34 TOL. #34 DIM. #35 TOL. #35 DIM. #36 TOL. #36 DIM. #37 TOL. #37 DIM. #38 TOL. #38 DIM. #39 TOL. #39 DIM. #40 TOL. #40 DIM. #41 TOL. #41 DIM. #42 TOL. #42 DIM. #43 TOL. #43 DIM. #44 TOL. #44 DIM. #45 TOL. #45 DIM. #46 TOL. #46 DIM. #47 TOL. #47 DIM. #48 TOL. #48 DIM. #49 TOL. #49 DIM. #50 TOL. #50 DIM. #51 TOL. #51 DIM. #52 TOL. #52 DIM. #53 TOL. #53 DIM. #54 TOL. #54 DIM. #55 TOL. #55 DIM. #56 TOL. #56 DIM. #57 TOL. #57 DIM. #58 TOL. #58 DIM. #59 TOL. #59 DIM. #60 TOL. #60 DIM. #61 TOL. #61 DIM. #62 TOL. #62 DIM. #63 TOL. #63 DIM. #64 TOL. #64 DIM. #65 TOL. #65 DIM. #66 TOL. #66 DIM. #67 TOL. #67 DIM. #68 TOL. #68 DIM. #69 TOL. #69 DIM. #70 TOL. #70 DIM. #71 TOL. #71 DIM. #72 TOL. #72 DIM. #73 TOL. #73 DIM. #74 TOL. #74 DIM. #75 TOL. #75 DIM. #76 TOL. #76 DIM. #77 TOL. #77 DIM. #78 TOL. #78 DIM. #79 TOL. #79 DIM. #80 TOL. #80 DIM. #81 TOL. #81 DIM. #82 TOL. #82 DIM. #83 TOL. #83 DIM. #84 TOL. #84 DIM. #85 TOL. #85 DIM. #86 TOL. #86 DIM. #87 TOL. #87 DIM. #88 TOL. #88 DIM. #89 TOL. #89 DIM. #90 TOL. #90 DIM. #91 TOL. #91 DIM. #92 TOL. #92 DIM. #93 TOL. #93 DIM. #94 TOL. #94 DIM. #95 TOL. #95 DIM. #96 TOL. #96 DIM. #97 TOL. #97 DIM. #98 TOL. #98 DIM. #99 TOL. #99 DIM. #100 TOL. #100 DIM. #101 TOL. #101 DIM. #102 TOL. #102 DIM. #103 TOL. #103 DIM. #104 TOL. #104 DIM. #105 TOL. #105 DIM. #106 TOL. #106 DIM. #107 TOL. #107 DIM. #108 TOL. #108 DIM. #109 TOL. #109 DIM. #110 TOL. #110 DIM. #111 TOL. #111 DIM. #112 TOL. #112 DIM. #113 TOL. #113 DIM. #114 TOL. #114 DIM. #115 TOL. #115 DIM. #116 TOL. #116 DIM. #117 TOL. #117 DIM. #118 TOL. #118 DIM. #119 TOL. #119 DIM. #120 TOL. #120 DIM. #121 TOL. #121 DIM. #122 TOL. #122 DIM. #123 TOL. #123 DIM. #124 TOL. #124 DIM. #125 TOL. #125 DIM. #126 TOL. #126 DIM. #127 TOL. #127 DIM. #128 TOL. #128 DIM. #129 TOL. #129 DIM. #130 TOL. #130 DIM. #131 TOL. #131 DIM. #132 TOL. #132 DIM. #133 TOL. #133 DIM. #134 TOL. #134 DIM. #135 TOL. #135 DIM. #136 TOL. #136 DIM. #137 TOL. #137 DIM. #138 TOL. #138 DIM. #139 TOL. #139 DIM. #140 TOL. #140 DIM. #141 TOL. #141 DIM. #142 TOL. #142 DIM. #143 TOL. #143 DIM. #144 TOL. #144 DIM. #145 TOL. #145 DIM. #146 TOL. #146 DIM. #147 TOL. #147 DIM. #148 TOL. #148 DIM. #149 TOL. #149 DIM. #150 TOL. #150 DIM. #151 TOL. #151 DIM. #152 TOL. #152 DIM. #153 TOL. #153 DIM. #154 TOL. #154 DIM. #155 TOL. #155 DIM. #156 TOL. #156 DIM. #157 TOL. #157 DIM. #158 TOL. #158 DIM. #159 TOL. #159 DIM. #160 TOL. #160 DIM. #161 TOL. #161 DIM. #162 TOL. #162 DIM. #163 TOL. #163 DIM. #164 TOL. #164 DIM. #165 TOL. #165 DIM. #166 TOL. #166 DIM. #167 TOL. #167 DIM. #168 TOL. #168 DIM. #169 TOL. #169 DIM. #170 TOL. #170 DIM. #171 TOL. #171 DIM. #172 TOL. #172 DIM. #173 TOL. #173 DIM. #174 TOL. #174 DIM. #175 TOL. #175 DIM. #176 TOL. #176 DIM. #177 TOL. #177 DIM. #178 TOL. #178 DIM. #179 TOL. #179 DIM. #180 TOL. #180 DIM. #181 TOL. #181 DIM. #182 TOL. #182 DIM. #183 TOL. #183 DIM. #184 TOL. #184 DIM. #185 TOL. #185 DIM. #186 TOL. #186 DIM. #187 TOL. #187 DIM. #188 TOL. #188 DIM. #189 TOL. #189 DIM. #190 TOL. #190 DIM. #191 TOL. #191 DIM. #192 TOL. #192 DIM. #193 TOL. #193 DIM. #194 TOL. #194 DIM. #195 TOL. #195 DIM. #196 TOL. #196 DIM. #197 TOL. #197 DIM. #198 TOL. #198 DIM. #199 TOL. #199 DIM. #200 TOL. #200 DIM. #201 TOL. #201 DIM. #202 TOL. #202 DIM. #203 TOL. #203 DIM. #204 TOL. #204 DIM. #205 TOL. #205 DIM. #206 TOL. #206 DIM. #207 TOL. #207 DIM. #208 TOL. #208 DIM. #209 TOL. #209 DIM. #210 TOL. #210 DIM. #211 TOL. #211 DIM. #212 TOL. #212 DIM. #213 TOL. #213 DIM. #214 TOL. #214 DIM. #215 TOL. #215 DIM. #216 TOL. #216 DIM. #217 TOL. #217 DIM. #218 TOL. #218 DIM. #219 TOL. #219 DIM. #220 TOL. #220 DIM. #221 TOL. #221 DIM. #222 TOL. #222 DIM. #223 TOL. #223 DIM. #224 TOL. #224 DIM. #225 TOL. #225 DIM. #226 TOL. #226 DIM. #227 TOL. #227 DIM. #228 TOL. #228 DIM. #229 TOL. #229 DIM. #230 TOL. #230 DIM. #231 TOL. #231 DIM. #232 TOL. #232 DIM. #233 TOL. #233 DIM. #234 TOL. #234 DIM. #235 TOL. #235 	








MAGK SERIES CHART 4

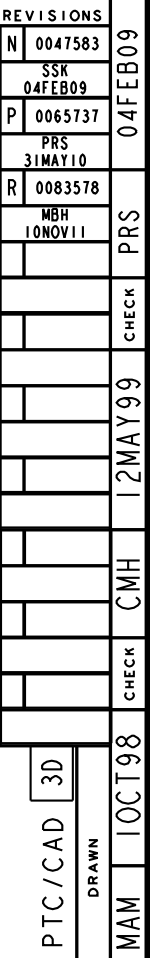

FRONT KEY ENTRY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table><tr><td>QTY</td><td>TOL</td><td>QTY</td><td>TOL</td></tr><tr><td>NO PLACES</td><td>0.0010</td><td>1.1</td><td>0.0010</td></tr><tr><td>ONE PLACE</td><td>0.0010</td><td>1.111</td><td>0.0010</td></tr><tr><td>TWO PLACES</td><td>0.015006</td><td>1.111</td><td>0.015006</td></tr><tr><td>THREE PLACES</td><td></td><td></td><td></td></tr><tr><td>ANGLES</td><td></td><td></td><td></td></tr></table>		QTY	TOL	QTY	TOL	NO PLACES	0.0010	1.1	0.0010	ONE PLACE	0.0010	1.111	0.0010	TWO PLACES	0.015006	1.111	0.015006	THREE PLACES				ANGLES			
QTY	TOL	QTY	TOL																								
NO PLACES	0.0010	1.1	0.0010																								
ONE PLACE	0.0010	1.111	0.0010																								
TWO PLACES	0.015006	1.111	0.015006																								
THREE PLACES																											
ANGLES																											
FED. MFG. CODE 91929	CATALOG LISTING	<table><tr><td>SI METRIC</td><td>US CUSTOMARY</td></tr><tr><td>☒</td><td>☐</td></tr></table>		SI METRIC	US CUSTOMARY	☒	☐																				
SI METRIC	US CUSTOMARY																										
☒	☐																										
MICRO SWITCH a Honeywell Division	SWITCH - DOOR INTERLOCK	GK SERIES CHART 4																									
		DESIGN UNITS																									
		WEIGHT 1.5 KC / 2.2 LB																									

KEY CODE 9

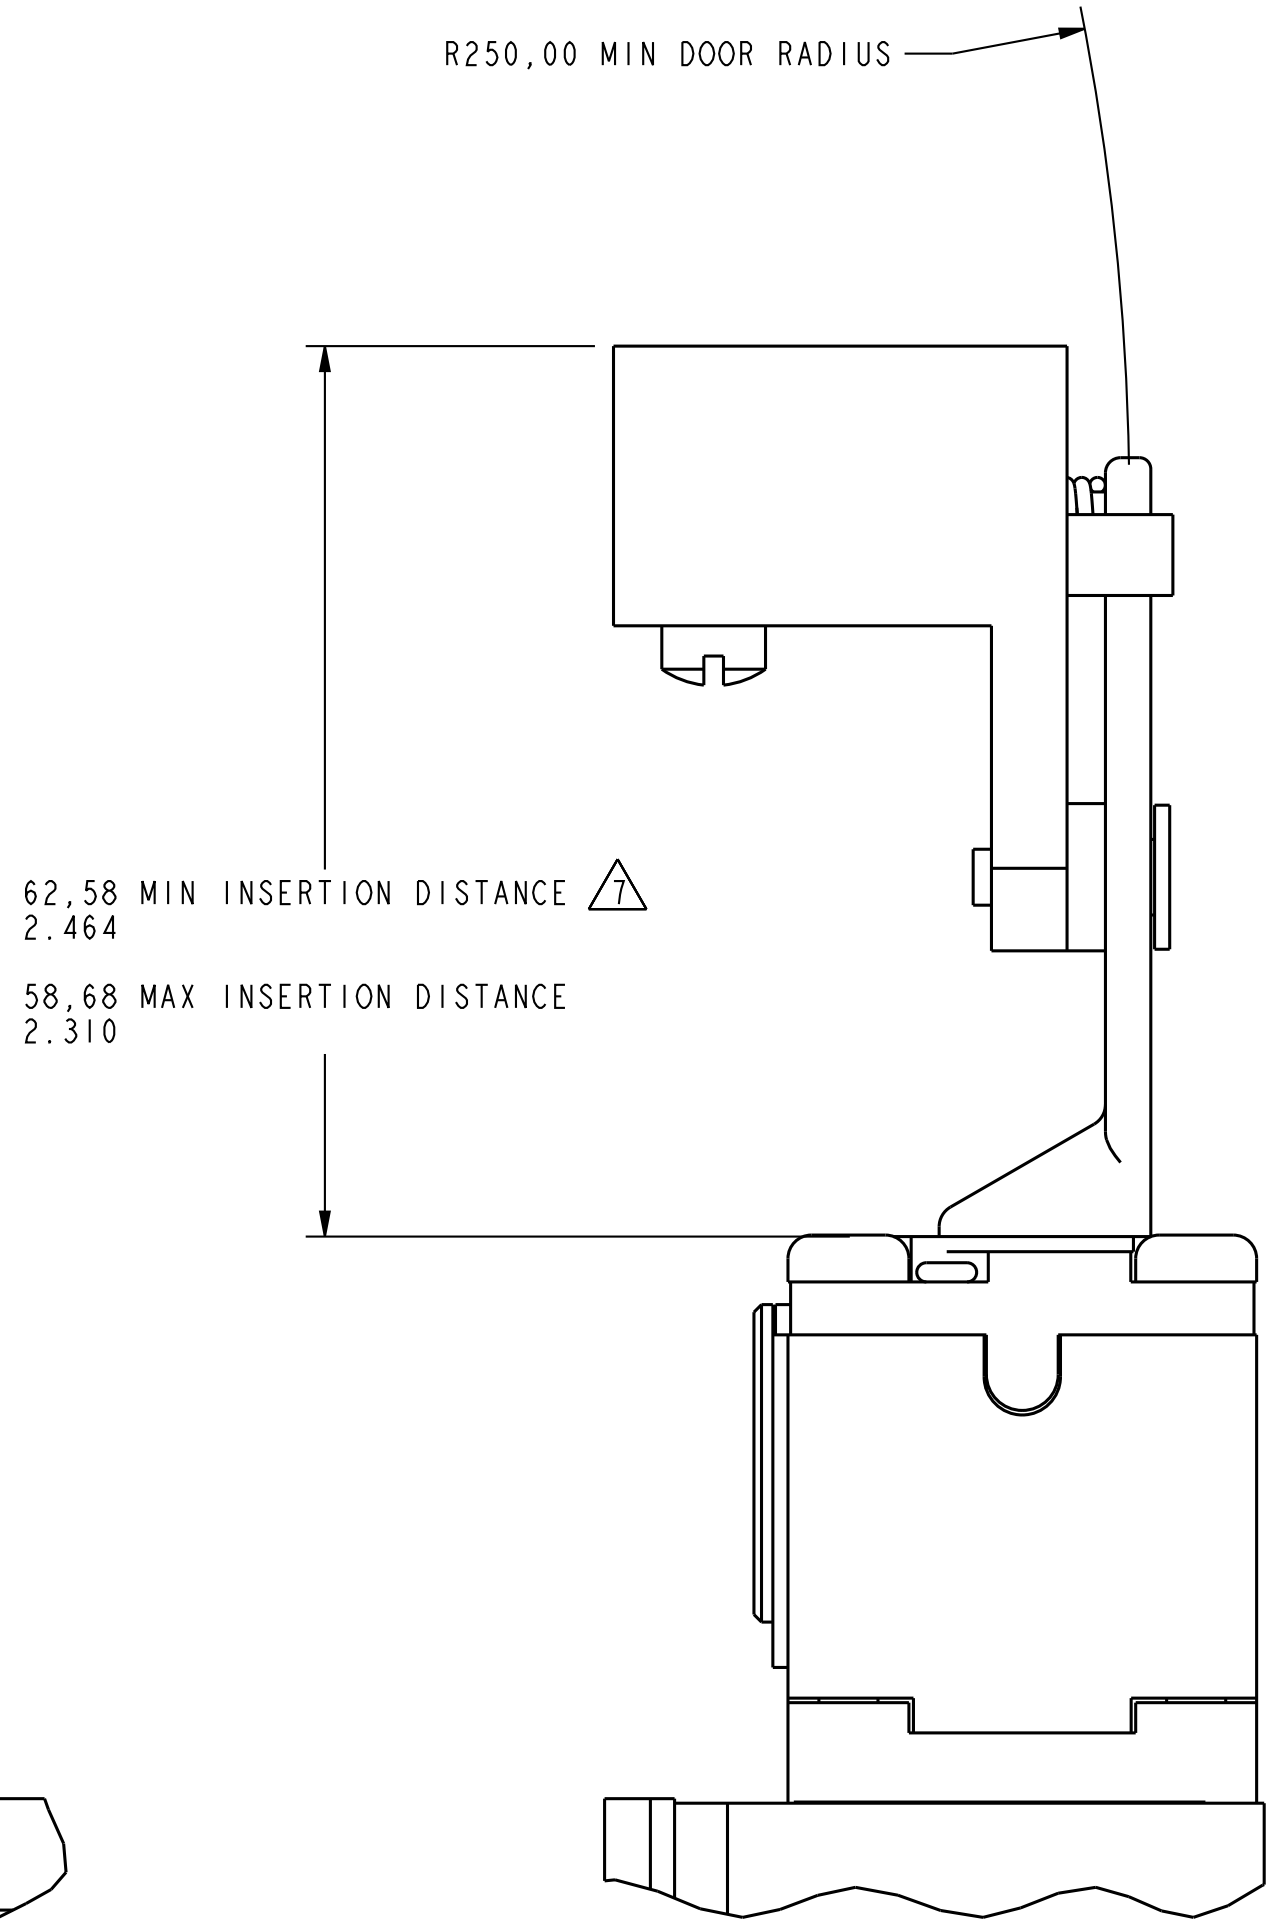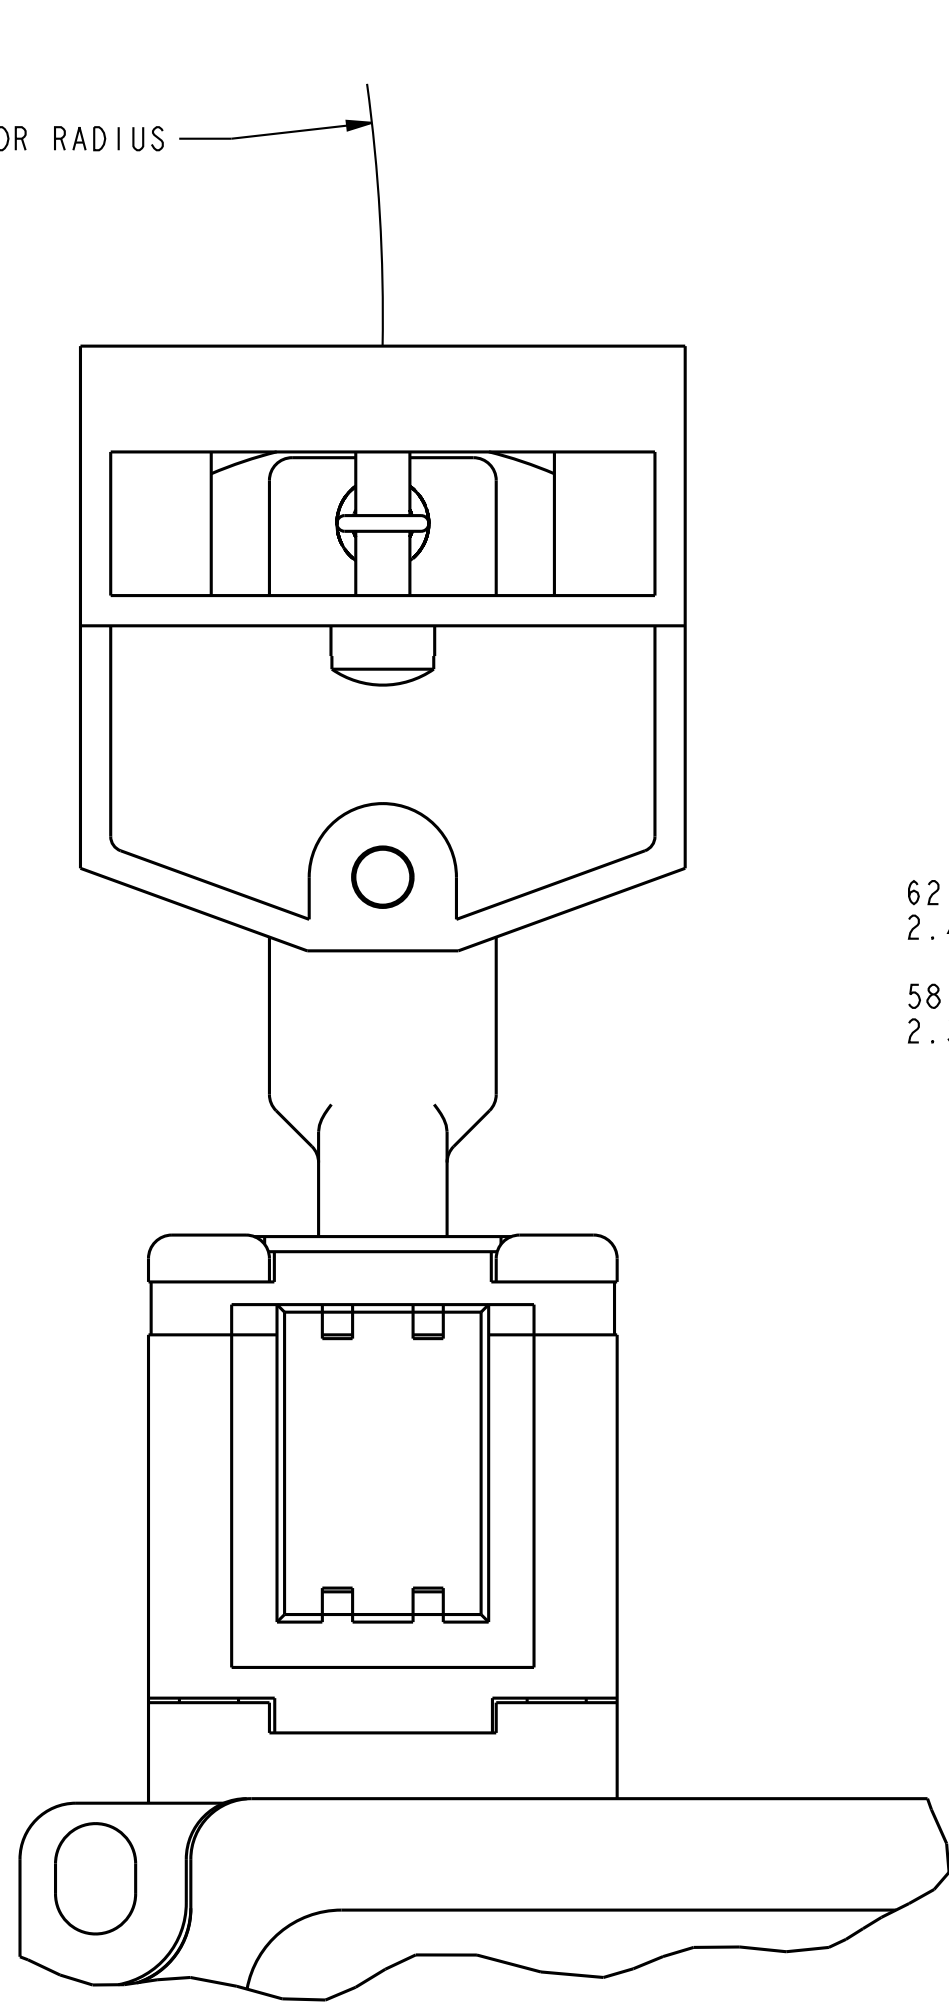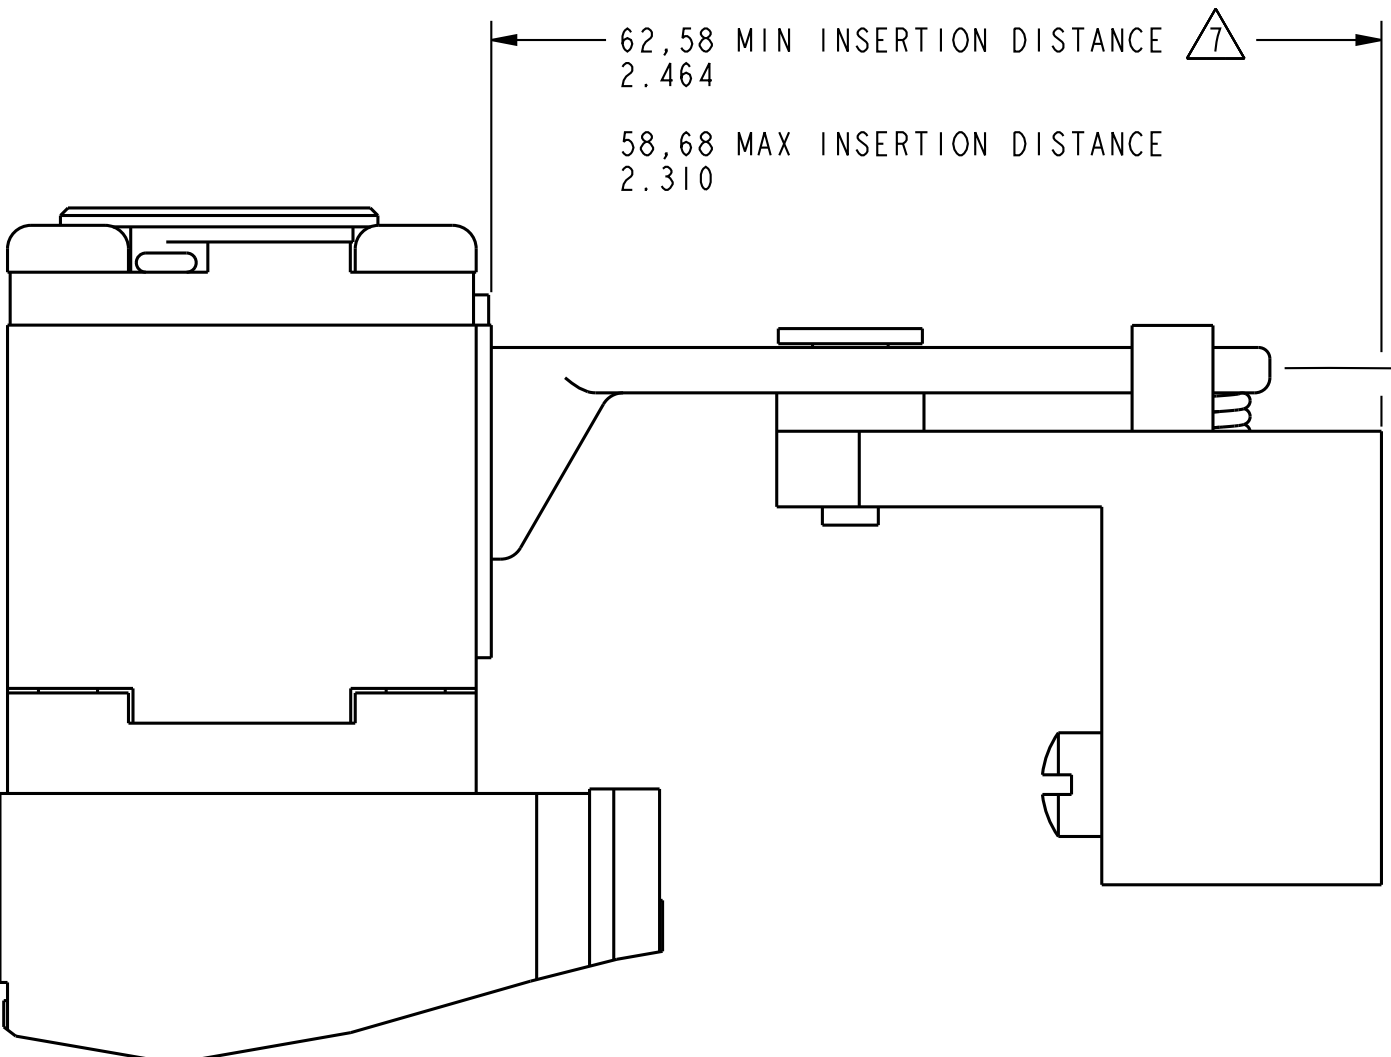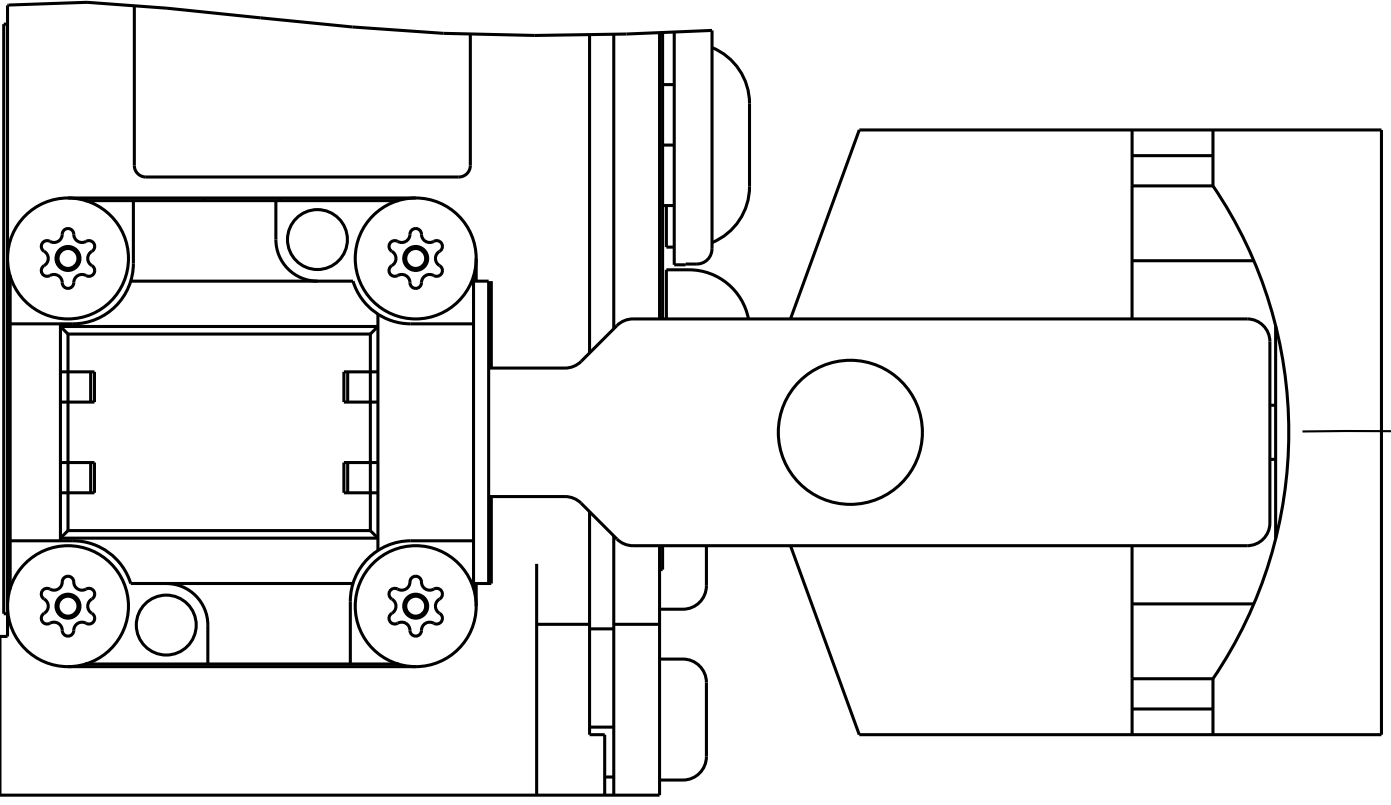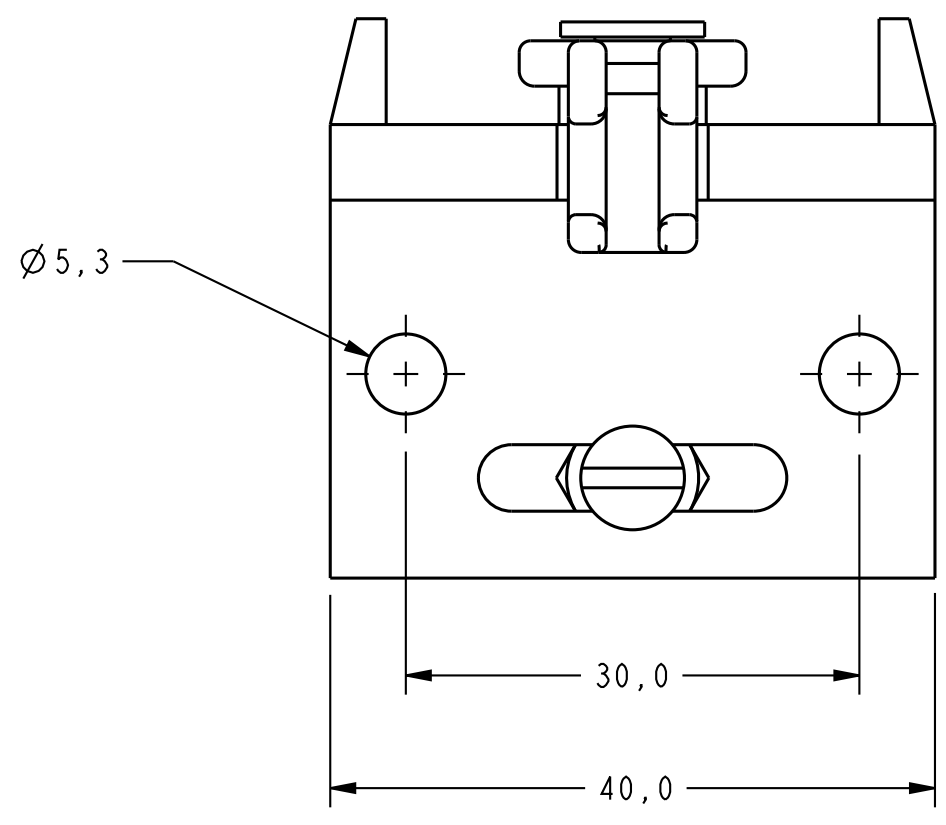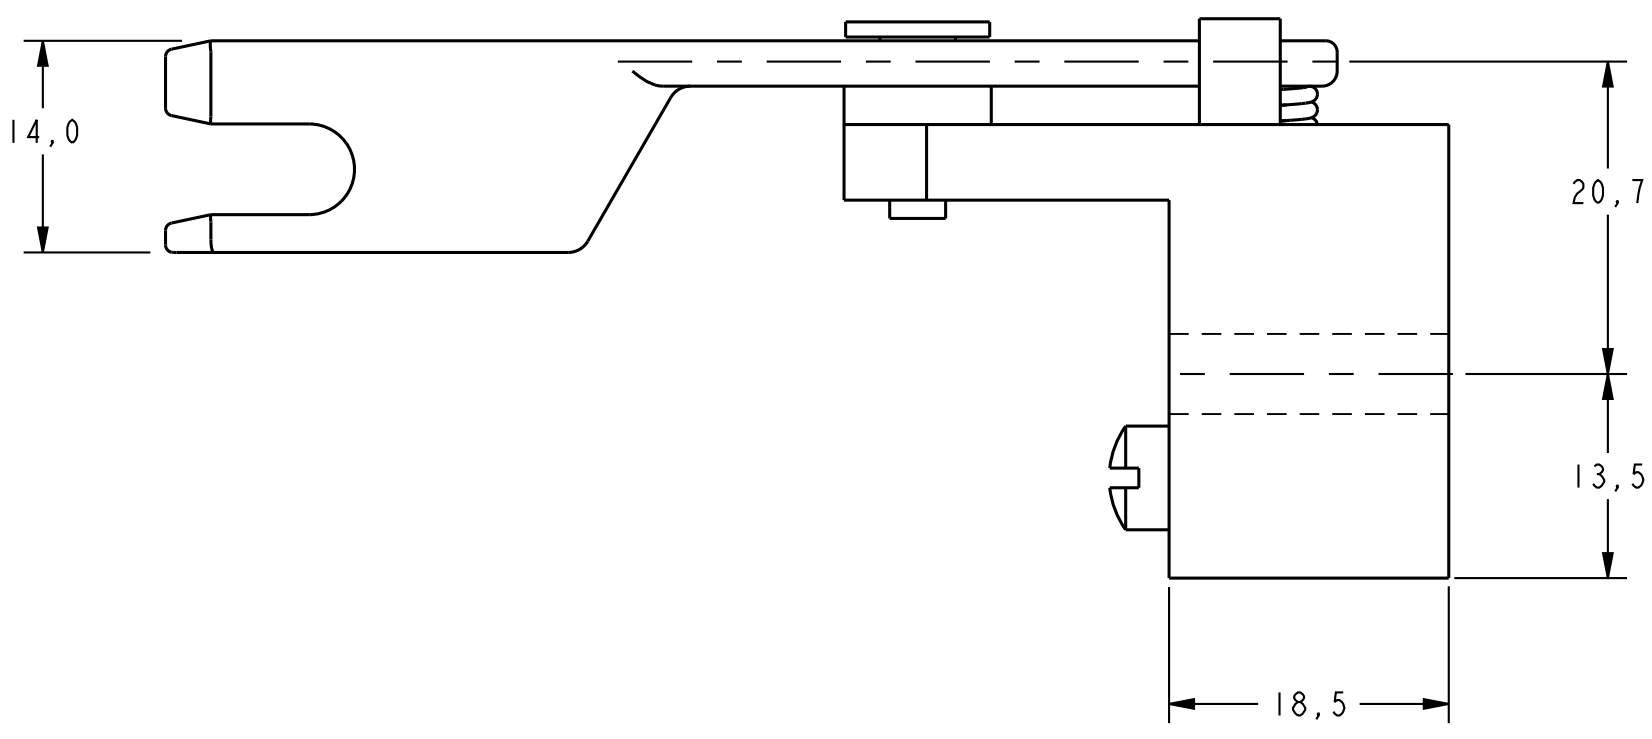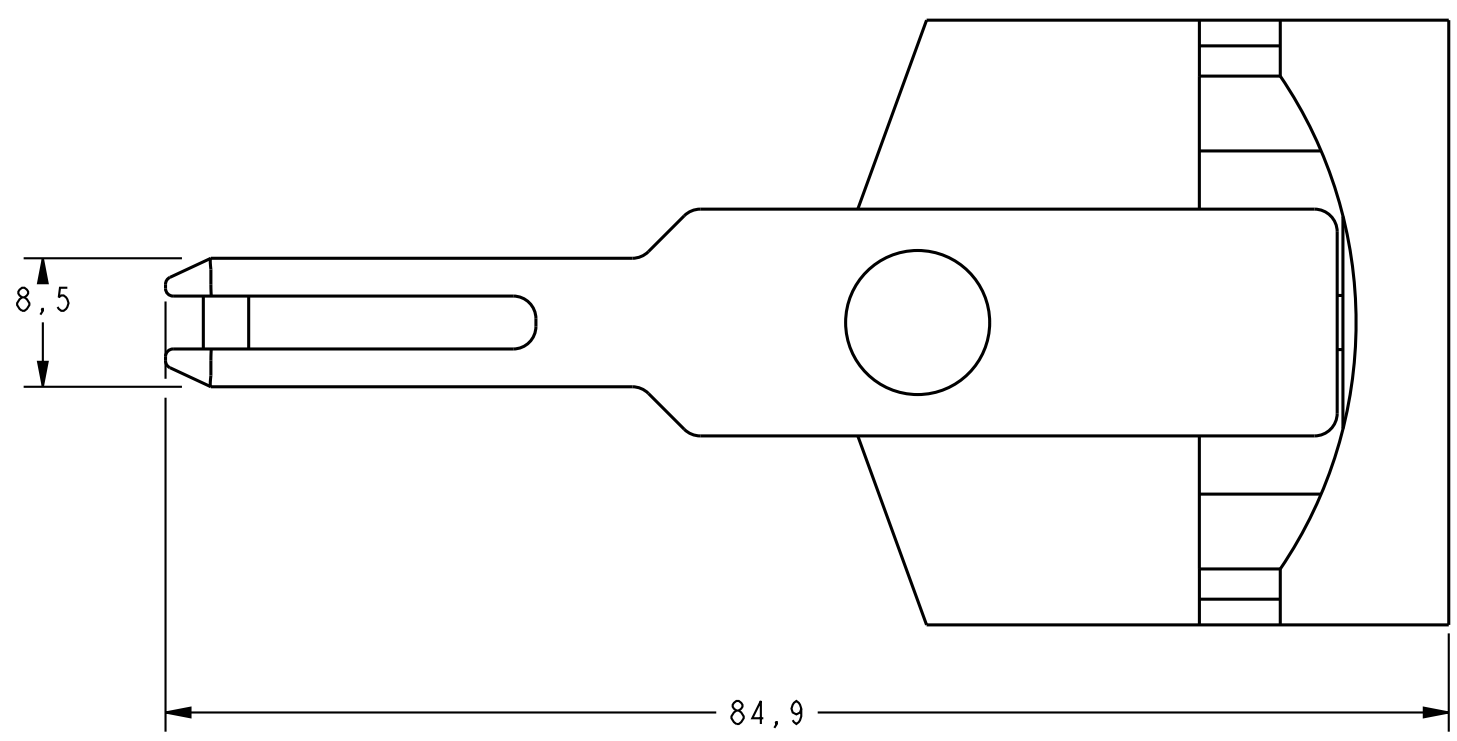


TOP KEY ENTRY

FRONT KEY ENTRY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			
FED. MFG. CODE 91929		CATALOG LISTING	
MICRO SWITCH a Honeywell Division		SWITCH - DOOR INTERLOCK	
GK SERIES CHART 4		DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY ☐	
WEIGHT 1,5 KG / 3,3 LB			

THIRD ANGLE PROJECTION			
SCALE 2 : 1			
DO NOT SCALE PRINT			
TOLERANCES: APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1			
NO PLACES	INCH	TOL.	MM
ONE PLACE	1/16	0,04	1,0
TWO PLACES	1/32	0,0156	0,38
THREE PLACES	1/64	0,0078	0,19
ANGLES	1/16	0,0078	0,19

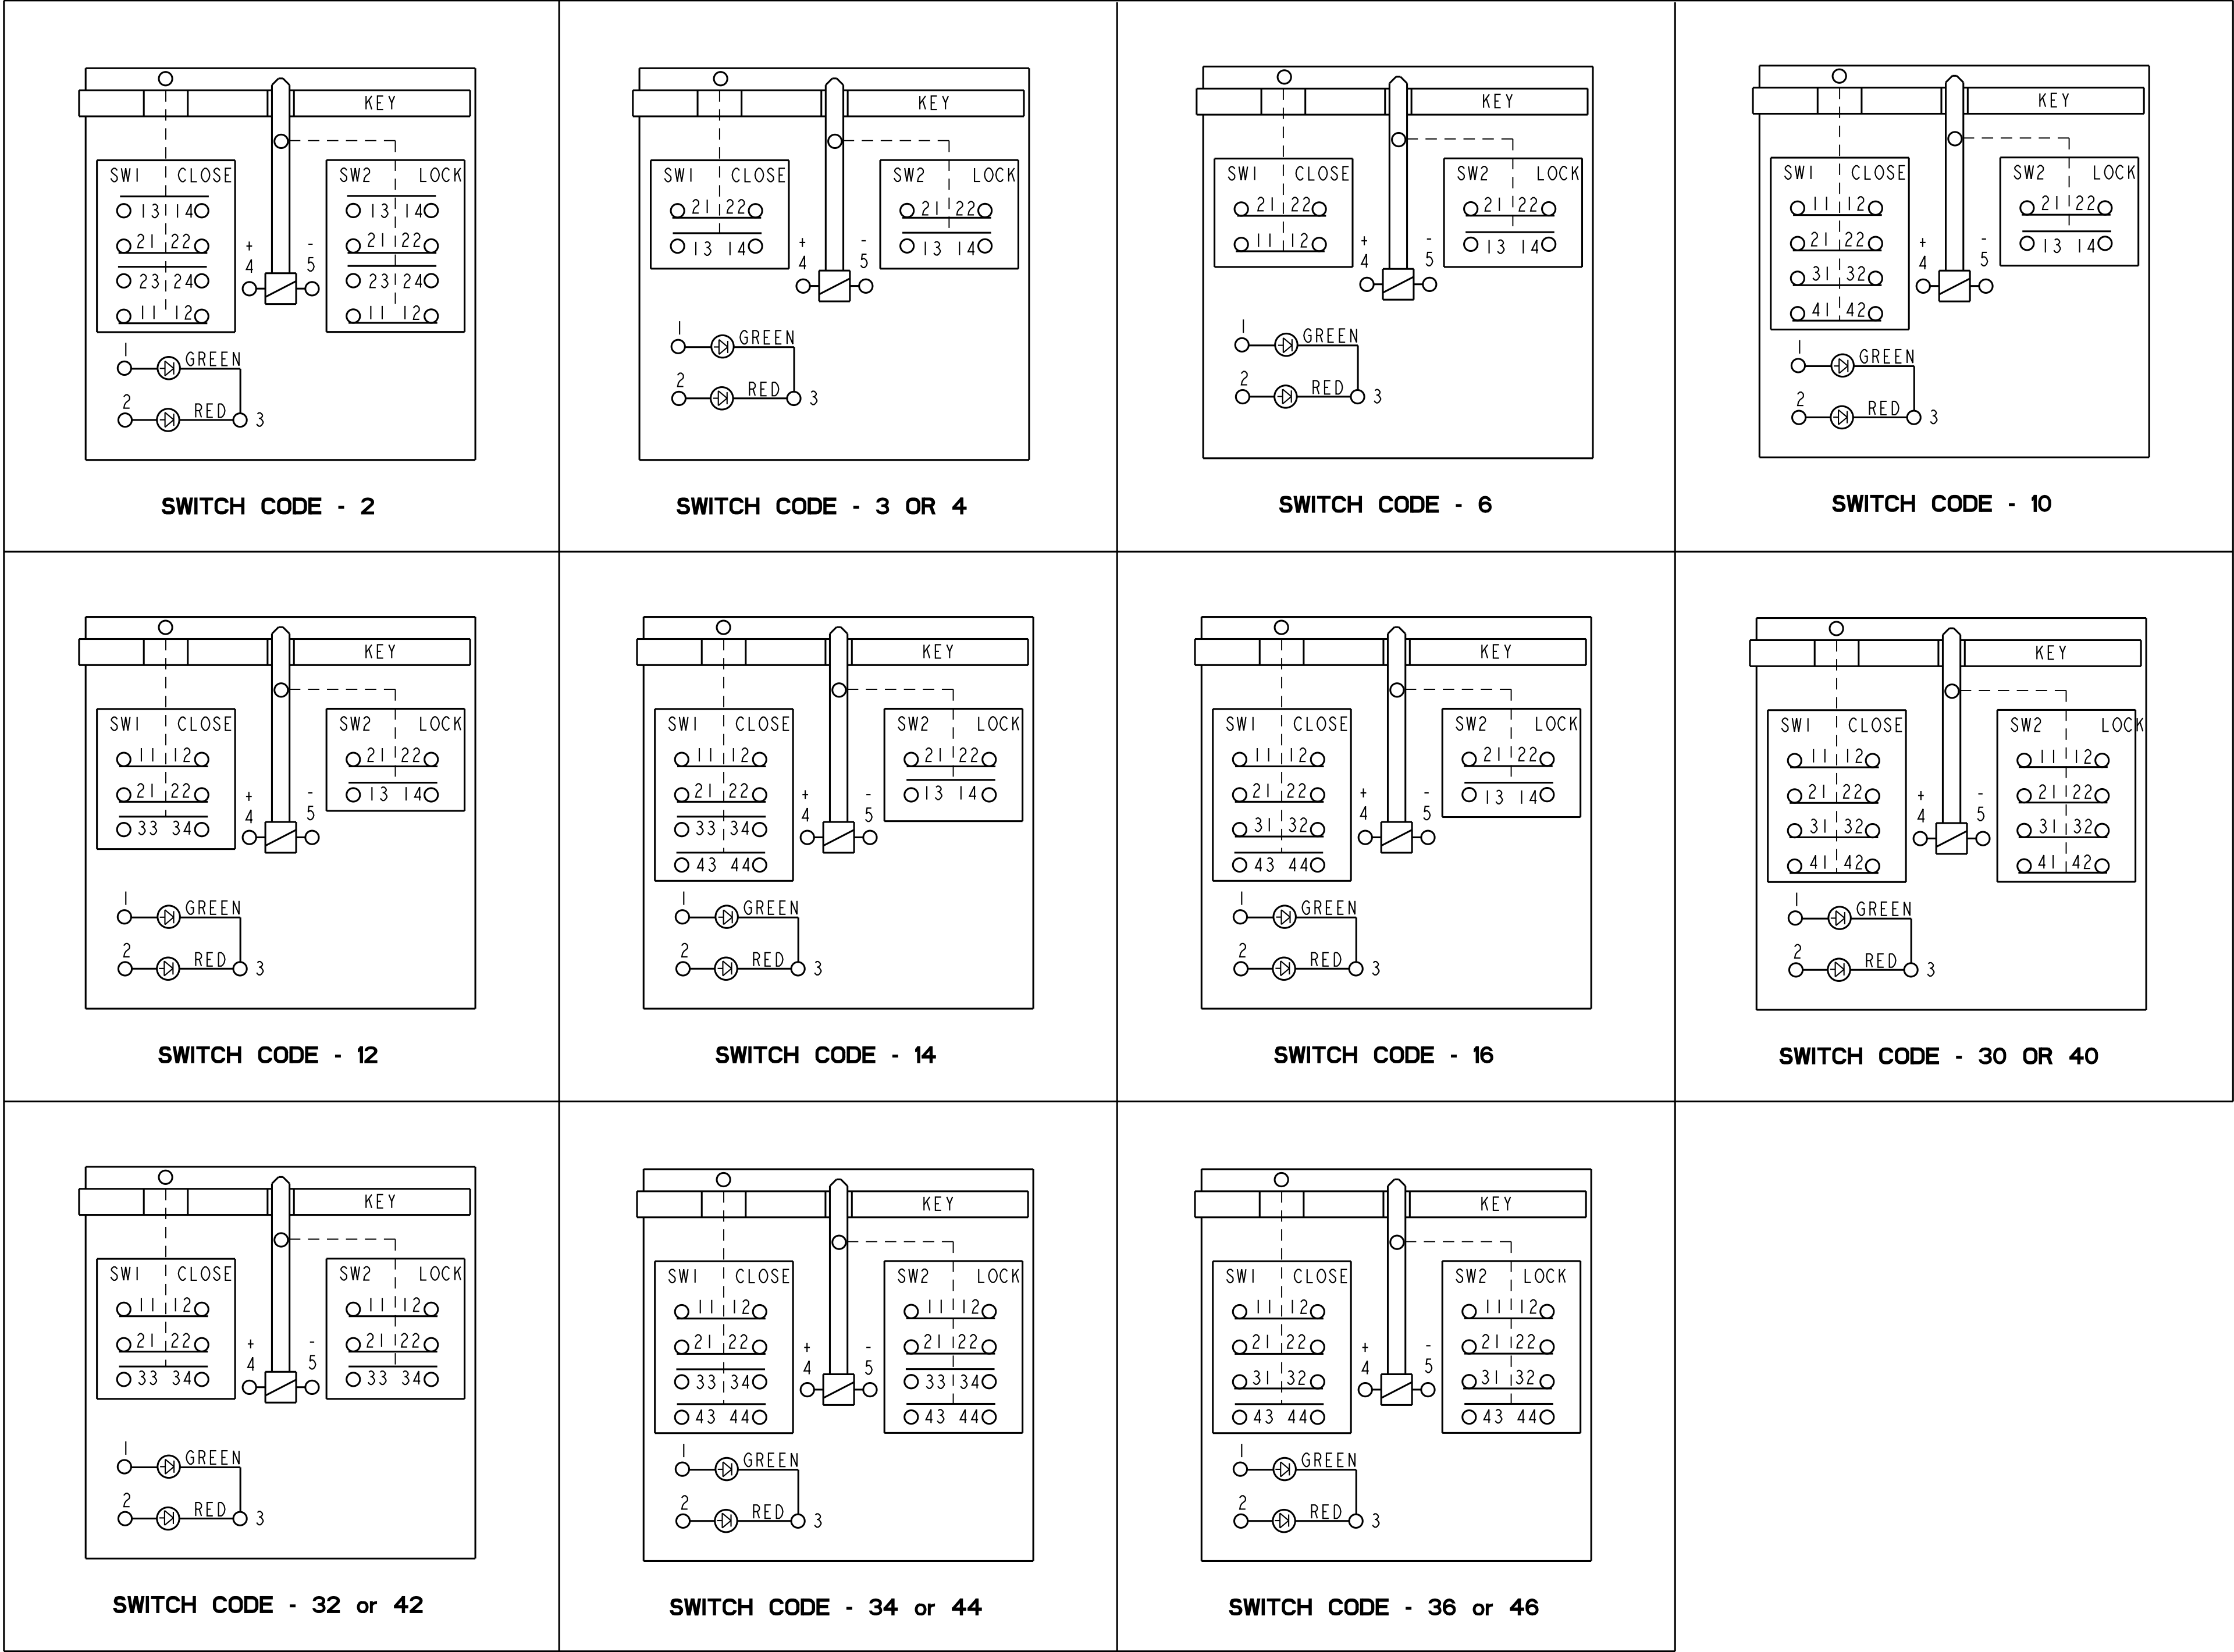


BODY / INDICATOR CODES - L OR R
TYPE / OVER-RIDE CODES - A OR B
DIAGRAMS SHOWN WITH KEY INSERTED AND LOCKED

PTC/CAD 3D
DRAWN
MAM LOC 98
CHECK
CMH 12MAY99
CHECK
PRS 04FEB09
CHECK
CMH 10NOV11
RELEASE NO. PR-23758
REPLACES
-
M GK SERIES CHART 4
PAGE 10 OF 16
ISSUE
5254
DRAWING NUMBER
NO. 0047583
REV. 04FEB09
P. 0065737
R. 0083578

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			
FED. MFG. CODE 91929		CATALOG LISTING	
MICRO SWITCH a Honeywell Division		SWITCH - DOOR INTERLOCK	
DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY		GK SERIES CHART 4	
WEIGHT 1.5 KG / 3.3 LB			

THIRD ANGLE PROJECTION			
SCALE NTS			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1			
NO PLACES	ONE PLACE	TWO PLACES	THREE PLACES
MM	IN	MM	IN
±.04	±.004	±.04	±.004
±.04	±.004	±.04	±.004
±.04	±.004	±.04	±.004




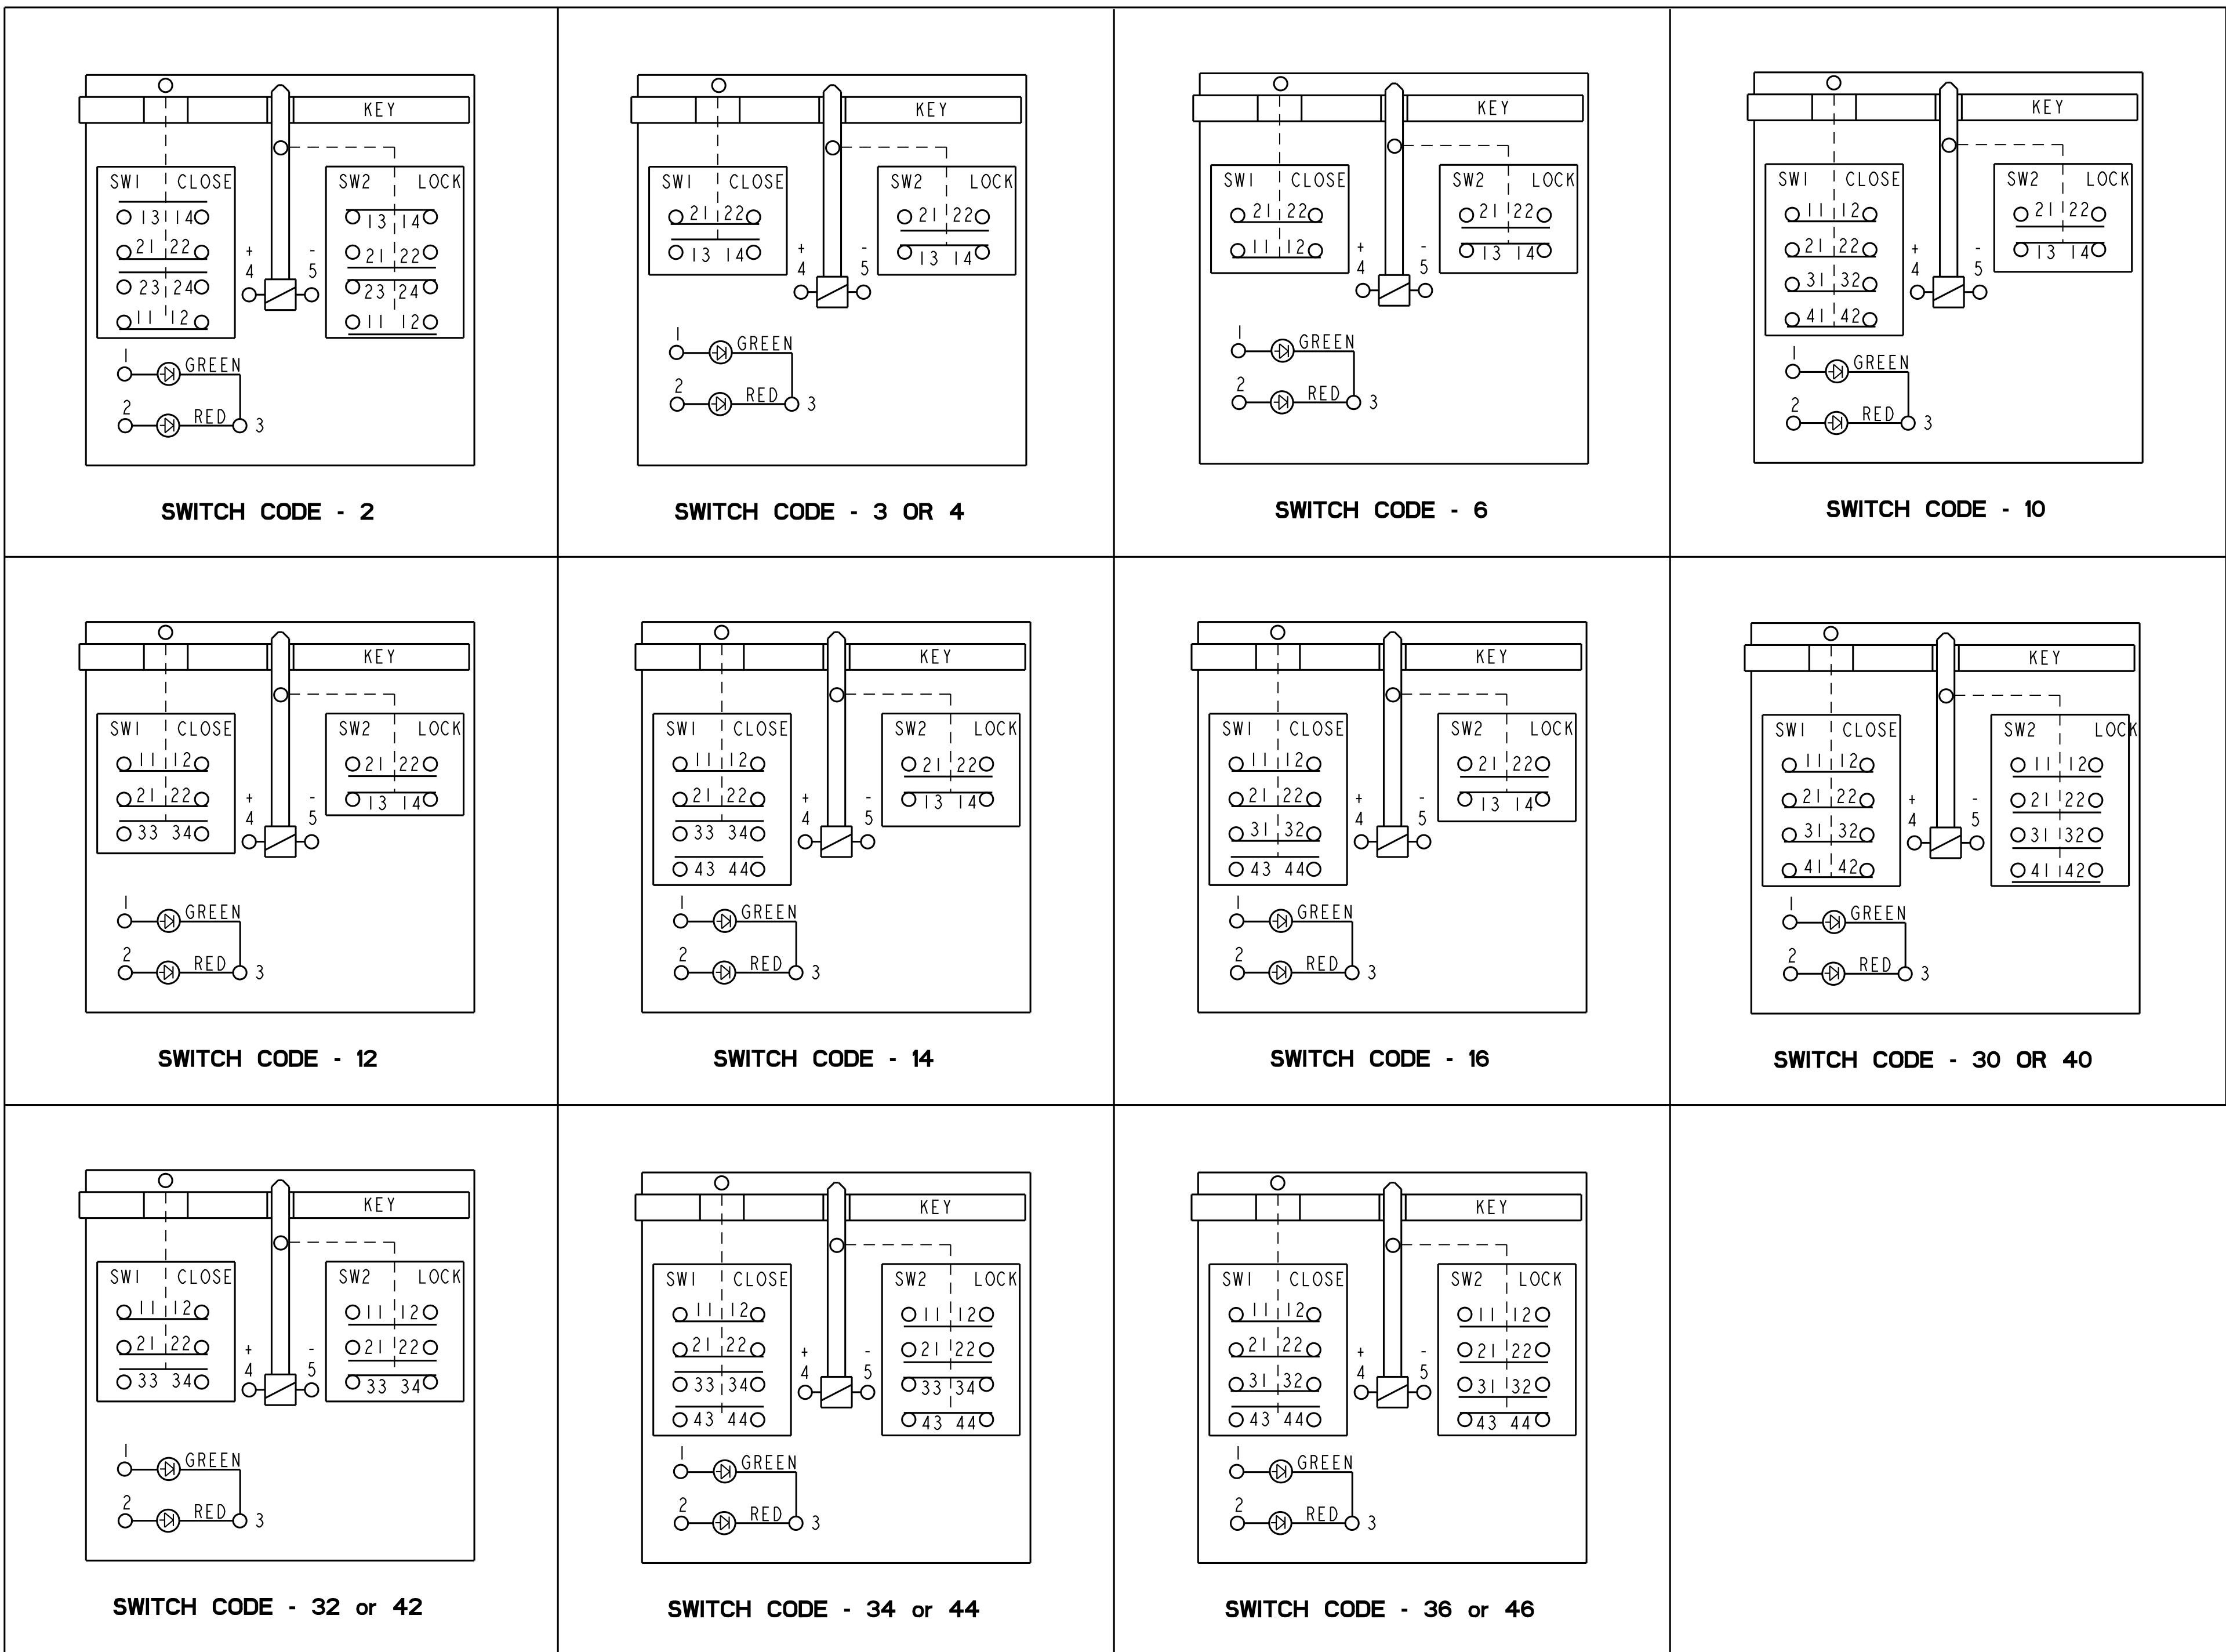



BODY / INDICATOR CODES - L OR R
 TYPE / OVER-RIDE CODES - S OR T
 DIAGRAMS SHOWN WITH KEY INSERTED AND LOCKED



MODIFICATION CODE: F05

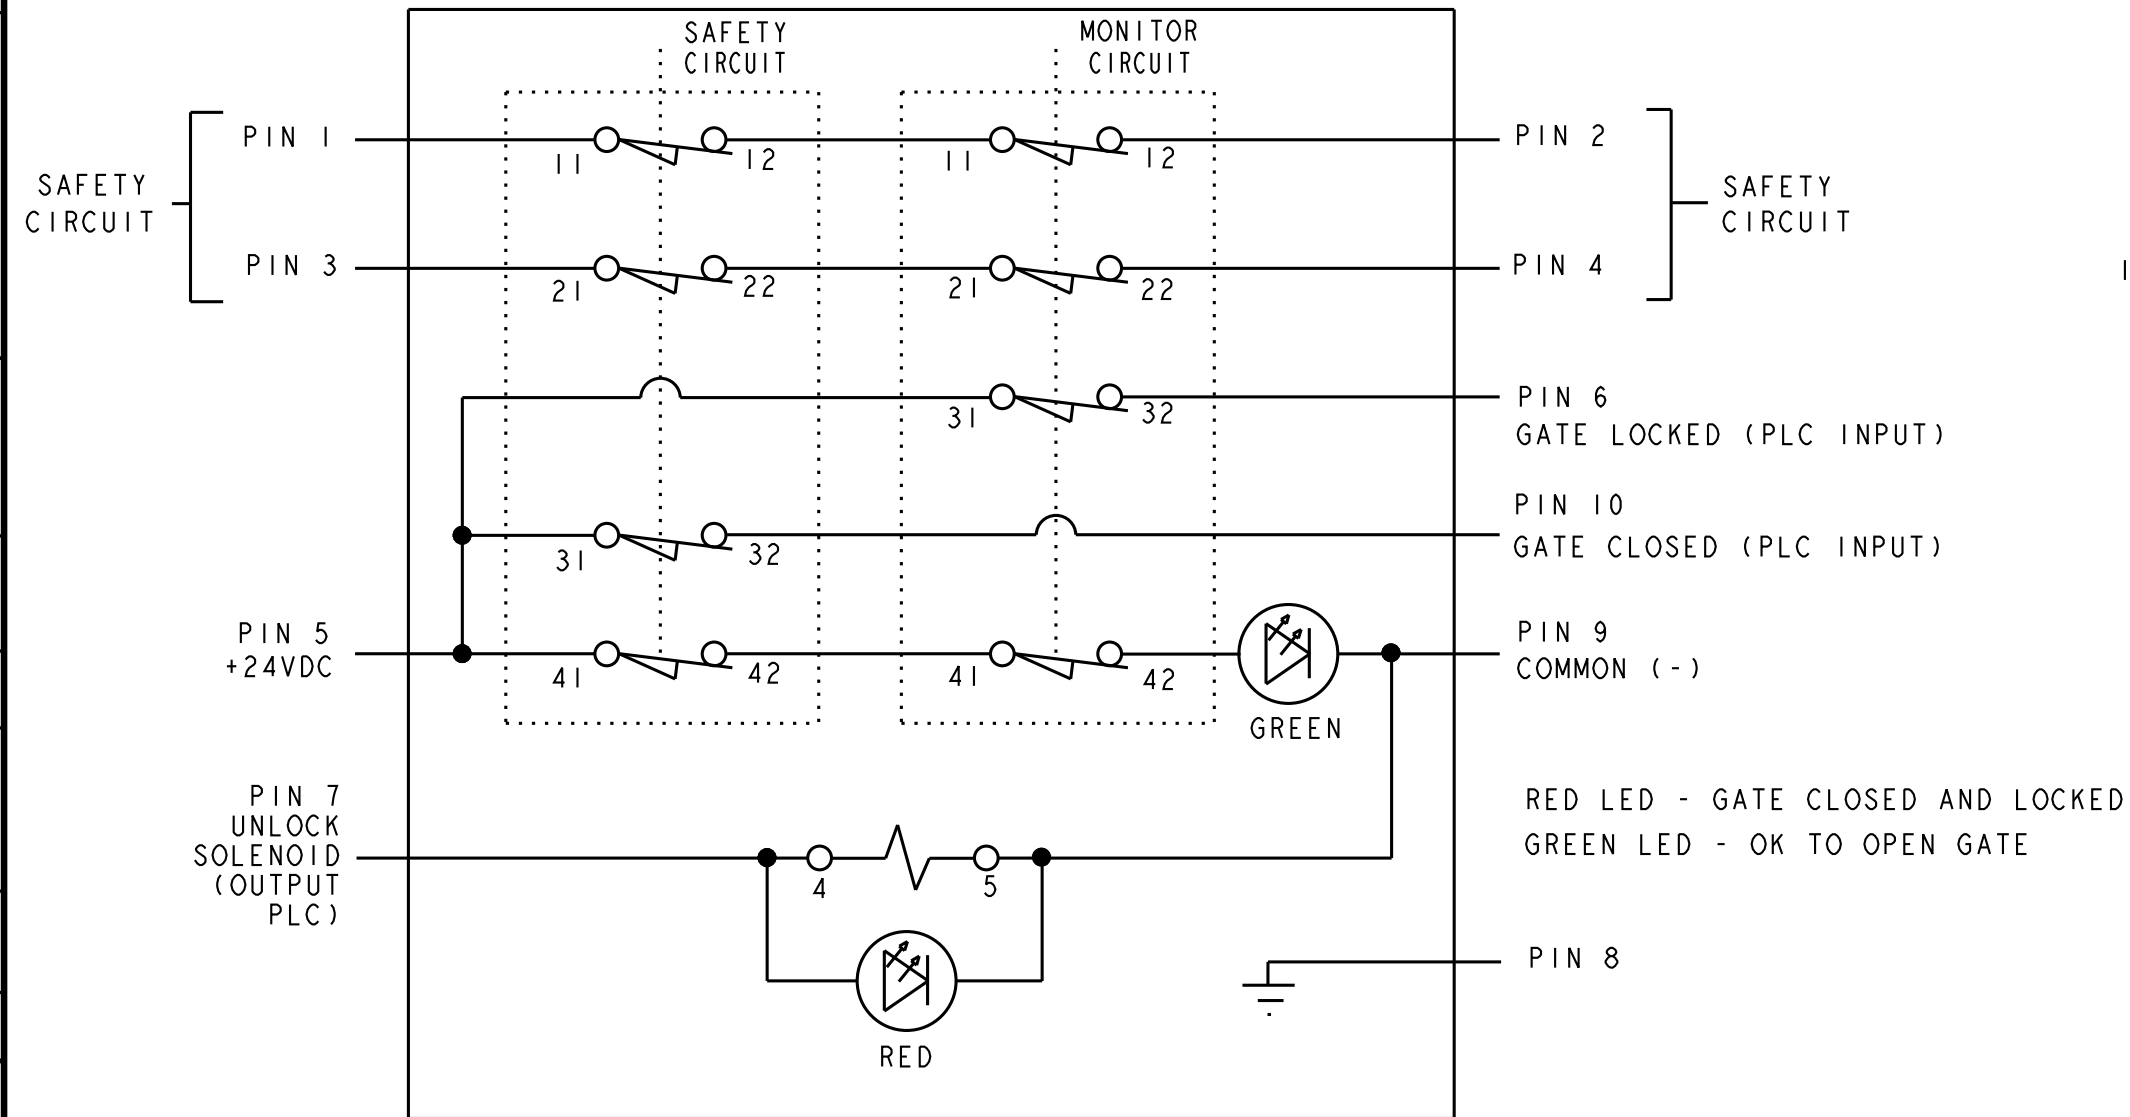

SWITCH DIAGRAM STATE
IS CLOSED AND LOCKED

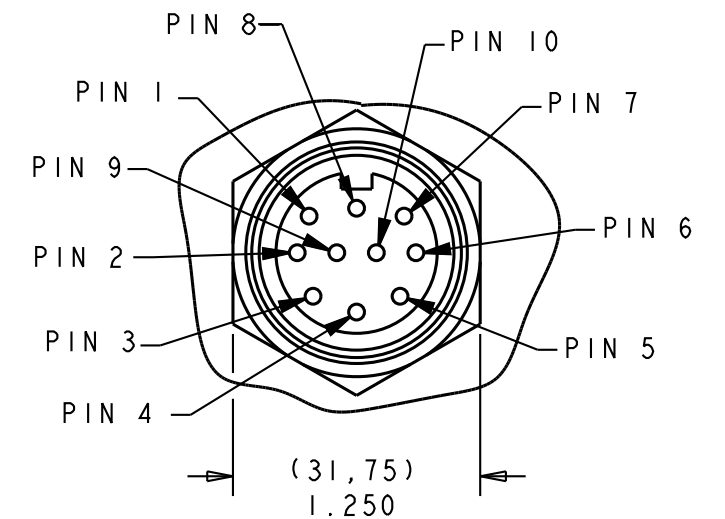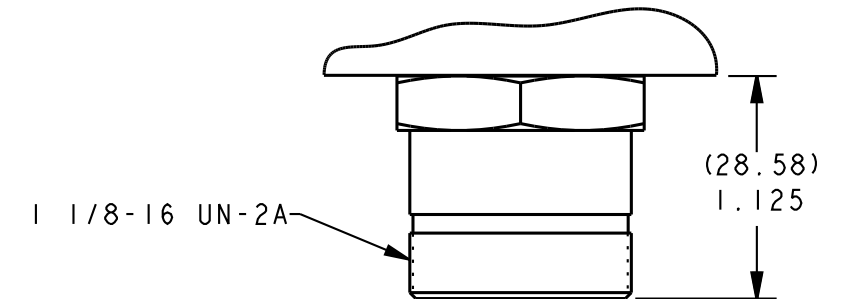

300V 7A
BRAD-HARRISON PART NO. 3R1006A21F010
OR EQUIVALENT

THIRD ANGLE PROJECTION			
			
SCALE		NTS	
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE :			
DIM. mm	TOL mm / in	DIM. mm / in	TOL mm / in
NO PLACES X	1 / 0.0	X X	0.8 / 0.03
ONE PLACE X.X	0.4 / 0.016	X.XX	0.38 / 0.015
TWO PLACES X.XX	0.15 / 0.006	X.XXX	0.13 / 0.005
THREE PLACES ANGLES			
SI METRIC		US CUSTOMARY	
DESIGN UNITS		☒	
WEIGHT		2,3 kg / 5 LB MAX	

PTC/CAD 3D
DRAWN

RS 17DEC04
CHECK

AK

17DEC04
CHECK

MBH 10NOV11
PR

0083578
R

31MAY10
PRS

0065737
P

04FEB09
SSK

0047583
N

REVISIONS

54
ISSUE

CMH

10NOV11
CHECK


RELEASE NO.

PAGE 16 OF 16



CATALOG LISTING

GK SERIES CHART 4

MODIFICATION CODE: F04

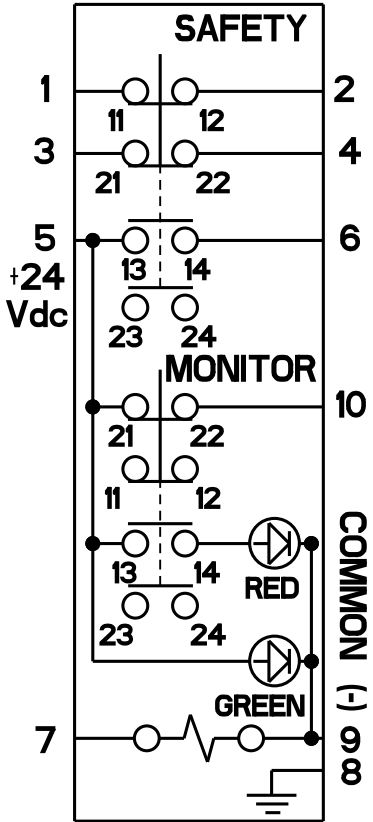

SWITCH DIAGRAM STATE
IS CLOSED AND LOCKED

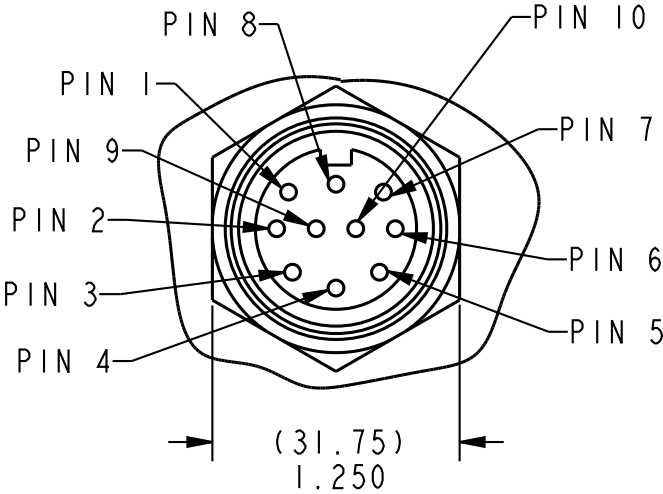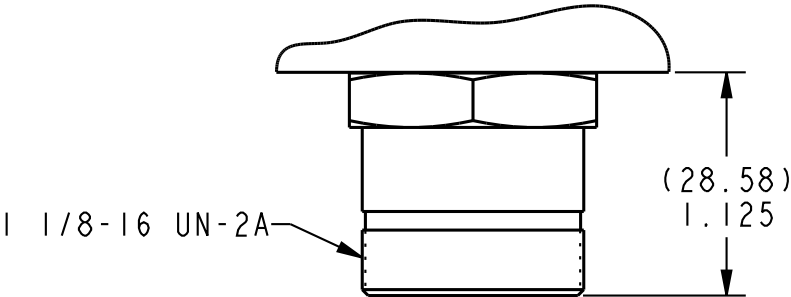

300V 7A
BRAD-HARRISON PART NO. 3R1006A21F010
OR EQUIVALENT

THIRD ANGLE PROJECTION

SCALE NTS

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE :

	DIM.	TOL.	DIM.	TOL.
	mm	mm / in	in	mm / in
NO PLACES	X	1 / .04	X	0.8 / .03
ONE PLACE	X.X	0.17 / .016	X.XX	0.38 / .015
TWO PLACES	X.XX	0.15 / .006	X.XXX	0.13 / .005
THREE PLACES				
ANGLES				

SI METRIC ☒ US CUSTOMARY ☐

DESIGN UNITS

WEIGHT 2,3 kg / 5 LB MAX

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell:

[GKFE16LXA2](#) [GKFE16LXA6](#) [GKLA2K1A2-F04](#) [GKLA2K1A2-F04-C](#) [GKLA2K2A2-F04-C](#) [GKLA3J1A2-F03-C](#)
[GKLA40F1C2-F05-C](#) [GKRA2K1A2-F03](#) [GKRA2K1A2-F04-C](#) [GKRA3K1A2-F03-C](#) [GKFE3P7T4](#) [GKGE3LXB4](#)
[GKLE44P7S4](#) [GKLG44LXS2](#) [GKLG46L7S2](#) [GKLA14L9A2-FW](#) [GKRG46MXA2-F21](#) [GKLE44L6S4](#) [GKLG6L6A2](#)
[GKRA14L6A2-FW](#) [GKLE46L9A4](#) [GKLG16L6A2](#) [GKLE46L7A2](#) [GKLE44L7T4](#) [GKLE36PXA2-F22](#) [GKRA15M6A4-FW](#)
[GKLE44L6A2](#) [GKLE44PXT2](#) [GKFG14LXA2](#) [GKLE44L9A4](#) [GKLG16L7A2](#) [GKLE46L9A2](#) [GKLE44LXS4](#)
[GKLE44P7T4](#) [GKRA14P9A2-FW](#) [GKLG16L6S2](#) [GKLE46L7S4](#) [GKLA15L6A2-FW](#) [GKLA15M6A2-FW](#) [GKLG16L7S2](#)
[GKRA15P9A2-FW](#) [GKLE44LXA2](#) [GKLG46L7A2](#) [GKLA15M9A2-FW](#) [GKLF46PXB2](#) [GKRG16L6A2](#) [GKLE44P6A4](#)
[GKLA14L6A2-FW](#) [GKLG46PXA2-F20](#) [GKLA15L9A2-FW](#) [GKLA15P6A2-FW](#) [GKLA46L6A4](#) [GKLE46P7A4](#)
[GKLG44PXA2](#) [GKLA14M9A2-FW](#) [GKRA15M6A2-FW](#) [GKLA2PXA2-F04](#) [GKRA15L6A2-FW](#) [GKLE44L7A2](#)
[GKLE44LXS2](#) [GKLE46LXA2](#) [GKLA15P6A4-FW](#) [GKLG46P6A2](#) [GKLF44LXS2](#) [GKLD44L6A2](#) [GKLE44L9A2](#)