THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
CE	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-14-011637	14AUG2014	HZ	RZ

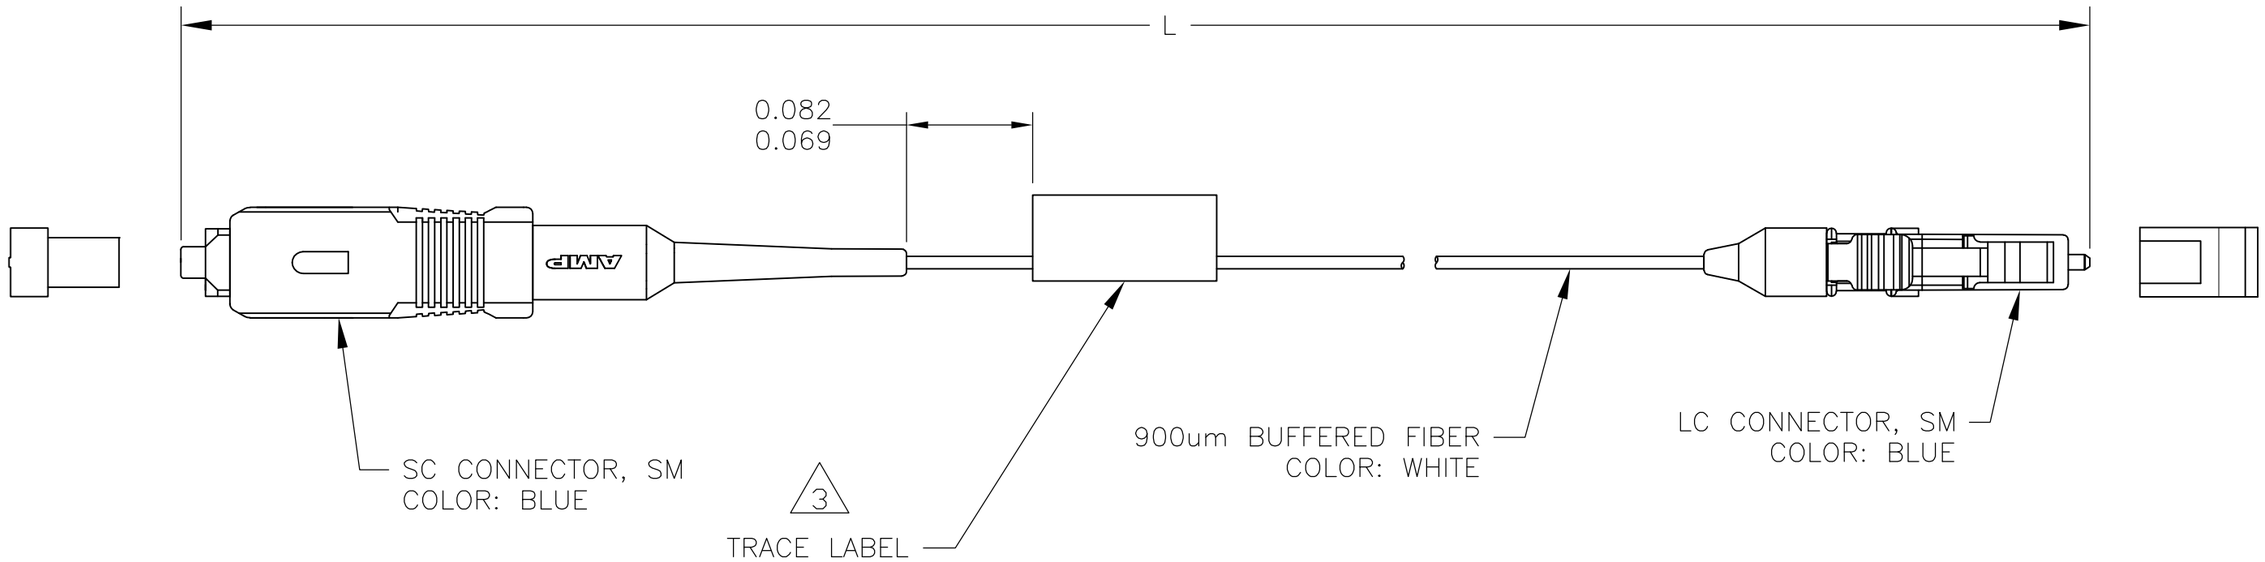

1. MAXIMUM INSERTION LOSS AT 1310nm:
   0.5 dB SC
   0.2 dB LC

2. MINIMUM RETURN LOSS AT 1310nm: 55dB. RETURN LOSS NOT REQUIRED FOR ASSEMBLIES <= 3 METERS.

3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702

	MAX IL (dB) SC 1	MAX IL (dB) LC 1	L METERS [INCHES]	PART NUMBER
	0.50	0.20	5.00±0.08 [196.8±3.0]	2064845-5
	0.50	0.20	4.00±0.05 [157.5±3.0]	2064845-4
2	0.50	0.20	3.00±0.05 [118.1±2.0]	2064845-3
2	0.50	0.20	2.00±0.05 [78.7±2.0]	2064845-2
2	0.50	0.20	1.00±0.05 [39.4±2.0]	2064845-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: METERS [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -
FINISH -

DWN B.BRIGGS 07MAY2010
CHK J.DUNCAN 07MAY2010
APVD J.DUNCAN 07MAY2010
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME
CABLE ASSY, FIBER OPTIC, 900um, SM.
SC TO LC
—

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2064845	—

CUSTOMER DRAWING

SCALE	SHEET	REV
NTS	1 OF 1	B