

8764


G

TUNING TOOL (MOLDED)

NOTES:

FILE: AIROUT

1. HANDLE TO BE FREE OF ALL GATE BURRS & FLASH.
2. ALL HEX CORNERS .005 RADIUS.
3. a. MOLD BIT (8765-1) IN PLACE CENTRALLY, AS DEPICTED
b. SURFACE OF EMBEDDED PORTION OF BIT OPTIONAL FOR GOOD MOLDING PRACTICES & MAXIMUM STRENGTH.
4. .015 MAX. FLASH ALLOWED BEYOND .06/.04 DIMENSION.
5. MATERIAL:
ZYTEL 70G33HS1L NC010
6. COLOR: UN5011, MID BLUE.

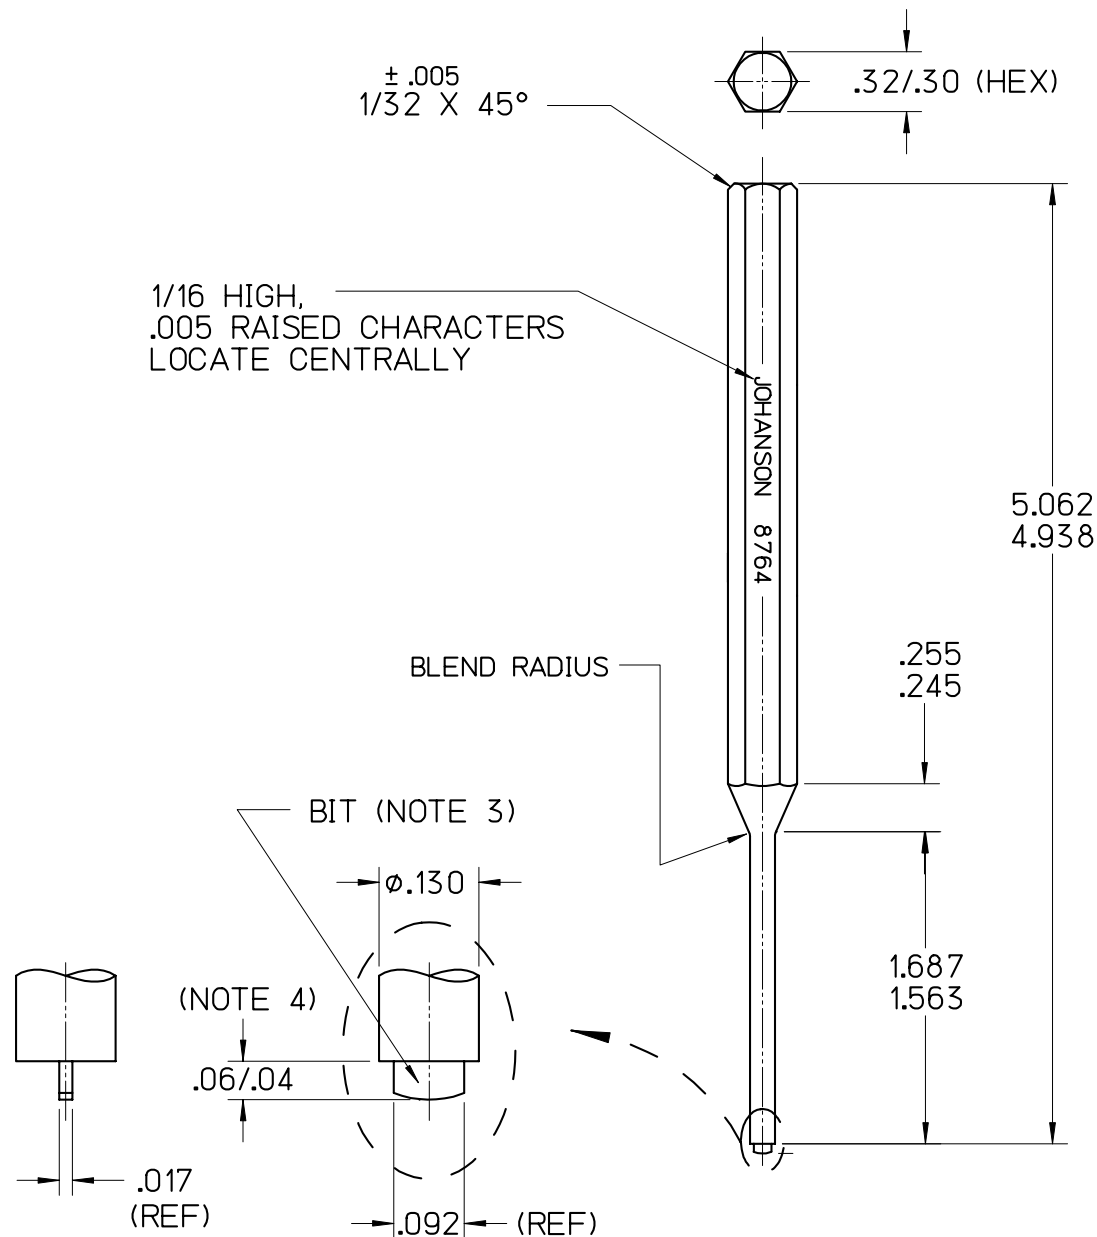

G	7/22/08	RJV	RJV	MAI	000685
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	APP.	SCALE
MLD	TAM	JHT	1" = 1"
DATE	DATE	DATE	.XX $\pm$.015
03/28/00	04/03/00	04/03/00	.XXX $\pm$.005



JOHANSON MANUFACTURING CORPORATION

ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION