

Features



- Low Noise Figure: 0.7 dB typical at 4 GHz
- High Associated Gain: 15.0 dB typical at 4 GHz
- High Output Power: 18.0 dBm typical $P_{1\text{ dB}}$ at 4 GHz
- Low Cost
- Tape-and-Reel

Description

The ATF-13284 is a high performance gallium arsenide Schottky-barrier-gate field effect transistor housed in a low cost plastic package. Its low noise figure makes this device appropriate for use in the first or second stages of low noise amplifiers operating in the 1-16 GHz frequency range.

This GaAs FET device has a nominal 0.3 micron gate length with a total gate periphery of 250 microns. Proven gold based metallization systems and nitride passivation assure a rugged, reliable device.


84 Plastic Package

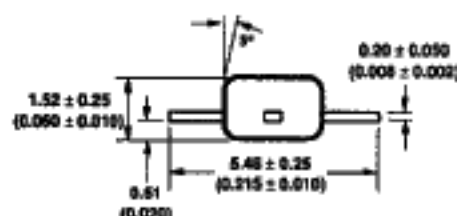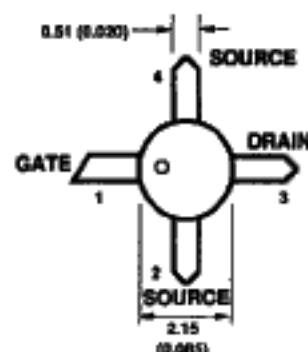

DIMENSIONS ARE IN MILLIMETERS (INCHES)

OPTIMUM NOISE FIGURE AND ASSOCIATED GAIN
vs. FREQUENCY

$T_A = 25^\circ\text{C}$, $V_{DS} = 2.5\text{ V}$, $I_{DS} = 20\text{ mA}$

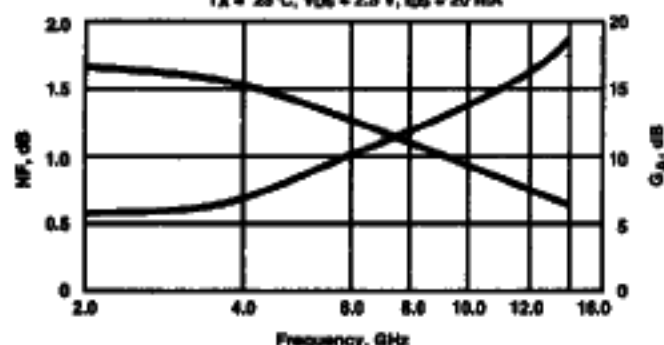

Noise Parameters: $V_{DS} = 2.5\text{ V}$, $I_{DS} = 20\text{ mA}$

Freq. GHz	NF0 dB	Gamma Opt Mag	Ang	$R_n/50$
1.0	0.6	.92	10	1.3
2.0	0.6	.85	21	1.2
4.0	0.7	.75	54	1.0
8.0	1.2	.57	144	0.3
12.0	1.6	.51	-118	0.1

Electrical Specifications, $T_A = 25^\circ\text{C}$

Symbol	Parameters and Test Conditions	Units	Min.	Typ.	Max.
NF0	Optimum Noise Figure: $V_{DS} = 2.5\text{ V}$, $I_{DS} = 15 - 30\text{ mA}$	dB		0.7	0.8
GA	Gain @ NF0: $V_{DS} = 2.5\text{ V}$, $I_{DS} = 15 - 30\text{ mA}$	dB		15.0	
$P_{1\text{ dB}}$	Power Output @ 1 dB Gain Compression: $V_{DS} = 4\text{ V}$, $I_{DS} = 40\text{ mA}$	dBm		18.0	
$G_{1\text{ dB}}$	1dB Compressed Gain: $V_{DS} = 4\text{ V}$, $I_{DS} = 40\text{ mA}$	dB		15.0	
g_m	Transconductance: $V_{DS} = 2.5\text{ V}$, $V_{GS} = 0\text{ V}$	mmho	25	55	
I_{DSS}	Saturated Drain Current: $V_{DS} = 2.5\text{ V}$, $V_{GS} = 0\text{ V}$	mA	40	50	90
V_P	Pinchoff Voltage: $V_{DS} = 2.5\text{ V}$, $I_{DS} = 1\text{ mA}$	V	-4.0	-1.5	-0.5

Note: 1. Refer to PACKAGING section "Tape-and-Reel Packaging for Surface Mount Semiconductors".

Absolute Maximum Ratings

Parameter	Symbol	Absolute Maximum ¹
Drain-Source Voltage	V _{DS}	+5 V
Gate-Source Voltage	V _{GS}	-4 V
Drain Current	I _{DS}	I _{DSS}
Total Power Dissipation ^{2,3}	P _T	225 mW
Channel Temperature	T _{CH}	175°C
Storage Temperature	T _{STG}	-65°C to +150°C

Thermal Resistance: $\theta_{JC} = 325^\circ\text{C/W}$; T_{CH} = 150°C
Liquid Crystal Measurement: 1 μm Spot Size⁴

Notes:

1. Operation of this device above any one of these parameters may cause permanent damage.
2. Case Temperature = 25°C.
3. Derate at 3.1 mW/°C for T_C > 102°C.
4. The small spot size of this technique results in a higher, though more accurate determination of θ_{JC} than do alternate methods. See MEASUREMENTS section for more information.


Part Number Ordering Information

Part Number	Devices Per Reel	Reel Size
ATF-13284-TR1	1000	7"
ATF-13284-TR2	4000	13"
ATF-13284-STR	1	strip

For more information, see "Tape and Reel Packaging for Semiconductor Devices", page 14-14.

Typical Performance, T_A = 25°C

(unless otherwise noted)

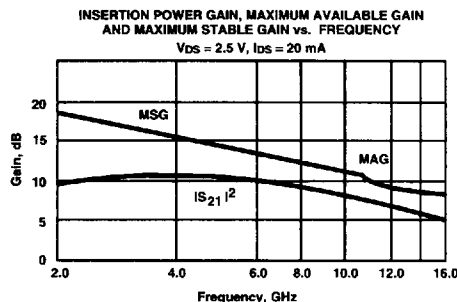

Typical Scattering Parameters: Common Source, Z₀ = 50 Ω

T_A = 25°C, V_{DS} = 2.5 V, I_{DS} = 20 mA

Freq. GHz	S ₁₁		dB	S ₂₁		dB	S ₁₂		dB	S ₂₂	
	Mag	Ang		Mag	Ang		Mag	Ang		Mag	Ang
0.5	.99	-11	10.2	3.22	169	-36.5	.015	80	.50	-11	
1.0	.98	-21	10.2	3.24	157	-32.8	.023	74	.50	-17	
2.0	.97	-33	10.3	3.26	145	-26.9	.045	67	.50	-24	
3.0	.91	-52	10.4	3.30	127	-23.2	.069	55	.49	-37	
4.0	.84	-73	10.5	3.36	108	-20.7	.092	42	.47	-50	
5.0	.77	-91	10.2	3.23	91	-19.3	.109	31	.46	-61	
6.0	.70	-108	9.8	3.08	76	-18.3	.121	22	.45	-71	
7.0	.64	-123	9.3	2.93	62	-17.6	.132	14	.43	-79	
8.0	.59	-142	9.1	2.85	47	-16.9	.153	5	.39	-89	
9.0	.54	-166	8.8	2.74	30	-16.3	.153	-5	.33	-104	
10.0	.51	168	8.3	2.59	14	-16.0	.159	-15	.25	-123	
11.0	.51	147	7.4	2.34	-2	-16.2	.155	-22	.19	-151	
12.0	.48	127	7.0	2.25	-12	-16.0	.159	-30	.14	-171	
13.0	.51	108	6.7	2.17	-26	-15.9	.161	-35	.12	177	
14.0	.57	87	6.1	2.02	-41	-16.0	.160	-46	.12	144	
15.0	.59	70	5.6	1.90	-57	-16.1	.158	-53	.15	102	
16.0	.62	58	5.1	1.79	-66	-16.1	.157	-59	.21	74	
17.0	.63	46	4.6	1.69	-80	-16.1	.157	-67	.28	60	
18.0	.64	35	3.7	1.53	-93	-16.1	.157	-84	.36	47	