


PART NUMBER	GT-NE6H1925T	REV.	D
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
04.02.98	E.C.N. #10437. & REDRAWN.		A
10.21.99	E.C.N. #10561. & #10BRDR.		B
12.13.06	E.C.N. #11148.		C
03.29.12	E.C.N. #10BRDR.		D

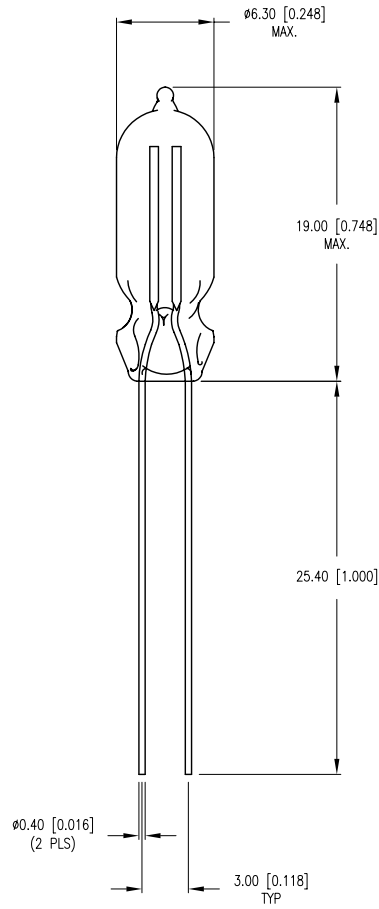

ELECTRO-OPTICAL CHARACTERISTICS

PARAMETER	MIN	TYP	MAX	UNITS
OPERATING VOLTAGE	90		115	V
STARTING VOLTAGE(AC)			85	V
(DC)			125	V
OPERATING CURRENT:				
W/ 33K OHM RES.		1.3±20% mA	① 110V	
W/ 82K OHM RES.		1.9±20% mA	② 220V	
LIGHT OUTPUT		111		mm
LIFE HOURS		20,000		HOURS
EMITTED COLOR:	ORANGE			

② ② NOTES:

- PARTS TO BE IN A SEALED BAG WITH DESICANT.
- LEAD DIAMETER: 0.40 [0.016].
- LEAD FINISH: (UT OR BLANK)-T-SILVER PLATED LEADS.
- CORONA MUST COVER A MINIMUM OF 25% OF THE ELECTRODE WITH NO FLICKERING.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION MAX.= +DECIMAL PRECISION -0.00 -DECIMAL PRECISION

UNCONTROLLED DOCUMENT

6mm x 19mm NEON LAMP, ORANGE HIGH BRIGHTNESS.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL
KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

[GT-NE6H1925T](#)