


Type B/3



third-length of type B as per DIN 41 612

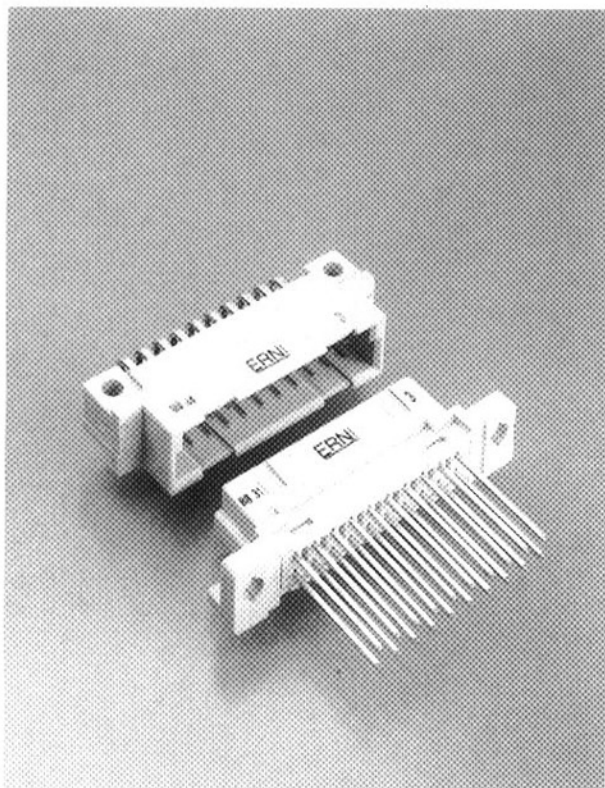

Dimensions

Male connector

Female connector

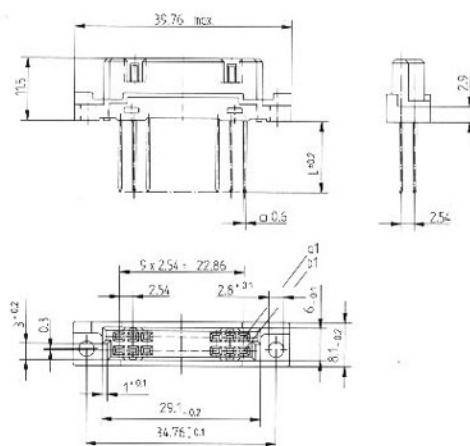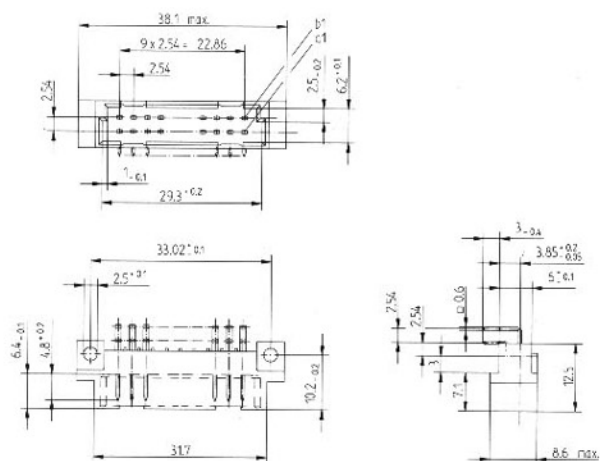


Coding system and early make/last break contact on page 105


Ordering details

Male connector type B/3

maximum two rows loaded, maximum 20 contacts




STV-B/3 20-M-ab




	107	207
PBT	424 207	

Female connector type B/3


maximum two rows loaded, maximum 20 contacts




STV-B/3 20-F-ab




	107	207
PBT	424 204	



STV-B/3 20-F-ab

Termination cross section  0.6x0.6mm



	107	207
PBT	004 487	

Other versions available on request.

<u>Part-No.</u>	<u>Page</u>
004487	2
424204	2
424207	2