


Max. 115 m³/h

AC centrifugal fans

Ø 138 x 40 mm

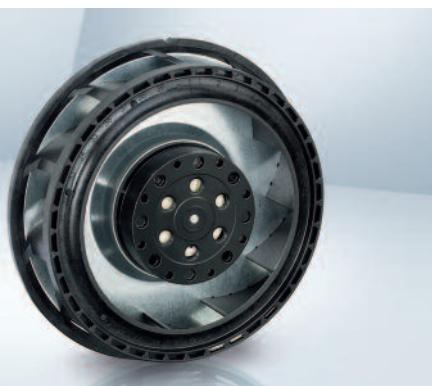

- Material:** Scroll housing: GRP¹⁾ (PBT)
Impeller: GRP¹⁾ (PA)
with sheet steel reinforced
- Direction of air flow:** centrifugal
- Direction of rotation:** Clockwise,
looking towards rotor
- Connection:** To 2 single wires AWG 22.
- Highlights:** Backward-curved impeller
- Weight:** 500 g


- Possible special versions:**
(See page 12)
 - Moisture protection
 - Salt spray protection
 - Degree of protection: IP 54

1) Fiberglass-reinforced plastic

Series RER 125


Nominal data		Air flow	Air flow	Nominal voltage	Frequency	Sound power level	Sintec sleeve bearings Ball ball bearings	Power consumption	Nominal speed	Temperature range	Service life L ₁₀ at 40 °C	at T _{max}	Curve
Type		m ³ /h	cfm	VAC	Hz	Bel(A)	□ / ■	Watts	rpm ⁻¹	°C	Hours	Hours	
RER 125-19/56		104	61	230	50	6.2	■	19.0	2 600	-30...+60	37 500 / 22 500		①
RER 125-19/06		115	68	115	60	6.5	■	18.0	2 850	-30...+70	40 000 / 20 000		②

Subject to change

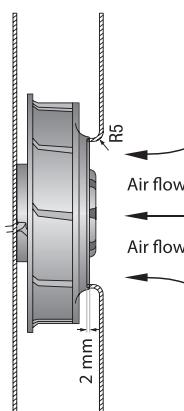

The air flow and sound level of the centrifugal fans without external housing depend on their individual installation conditions. The stated air flow and noise levels have been measured under the following conditions:

Centrifugal fan mounted on a base plate
220 x 220 mm.
Cover plate 220 x 220 mm with an air inlet of
Ø 86 mm, concentric to the impeller.

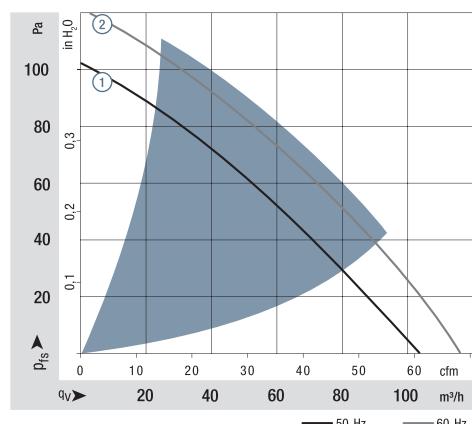

Air performance measured according to: ISO 5801.
Installation category A, with ebm-papst inlet ring without contact protection.
Noise: Total sound power level L_{WA} ISO 103002
measured on a hemisphere with a distance of 2 m.
Sound pressure level L_{PA} measured at 1 m distance
from fan axis.
The values given are applicable only under the specified
measuring conditions and may differ depending on the
installation conditions.
In the event of deviation from the standard configuration,
the parameters must be checked after installation!
For detailed information see
<http://www.ebmpapst.com/general-conditions>

