

Multilayer Power Inductor

CIG22H_MAE Series (2520/ EIA 1008)

APPLICATION


Mobile phones, DSC, DVC, PDA etc. for DC-DC Converter

FEATURES


- High Current Type
- Low DC resistance
- Magnetically shielded structure
- Free of all RoHS-regulated substances
- Monolithic structure for high reliability



RECOMMENDED LAND PATTERN

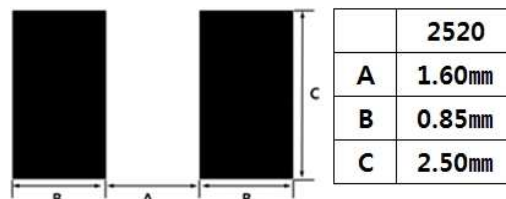

DIMENSION



TYPE	Dimension [mm]			
	L	W	T	D
22	2.5±0.2	2.0±0.2	0.9±0.1	0.55±0.25

DESCRIPTION

Part no.	Size (inch/mm)	Inductance (uH)@1MHz	DC Resistance(Ω)	Rated Current (A) ^{*1}	
				Typ.	Max.
CIG22HR33MAE	1008/2520	0.33 ±20 %	0.044±30 %	4.80	2.2
CIG22HR47MAE	1008/2520	0.47 ±20 %	0.044±30 %	3.80	2.1
CIG22HR56MAE	1008/2520	0.56 ±20 %	0.055±30 %	3.50	2.0
CIG22H1R0MAE	1008/2520	1.0 ±20 %	0.065±20 %	2.00	1.8
CIG22H1R2MAE	1008/2520	1.2 ±20 %	0.065±20 %	1.60	1.7
CIG22H1R5MAE	1008/2520	1.5 ±20 %	0.074±20 %	1.30	1.5
CIG22H2R2MAE	1008/2520	2.2 ±20 %	0.138±20 %	1.10	1.2
CIG22H3R3MAE	1008/2520	3.3 ±20 %	0.138±20 %	0.85	1.1

※Rated Current (A)^{*1}: DC current value when Inductance drops to 30% of nominal Inductance value (ONLY REFERENCE)


※Rated Current (A)^{*2}: DC current value when the self-generation of heat rises to 40℃ (Reference ambient temperature:25℃)

※Operating temperature range: -40 to +125℃ (Including self-temperature rise)


※Test equipment: Agilent :E4991A+16092A

CHARACTERISTIC DATA

1) Frequency characteristics (Typ.)

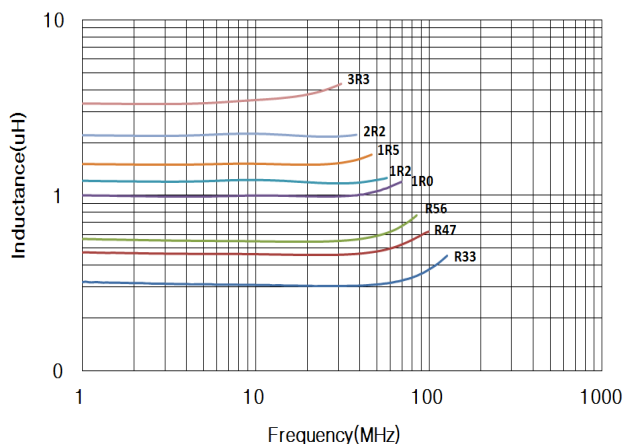

2) DC Bias characteristics (Typ.)

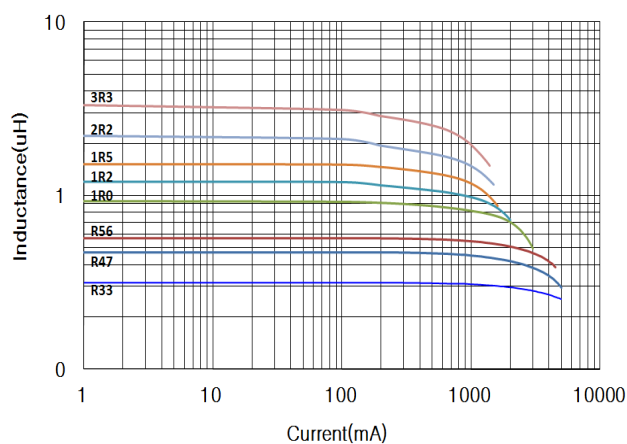


PRODUCT IDENTIFICATION

CI	G	22	H	1R0	M	A	E
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)


- | | |
|--|--|
| (1) Chip Inductor | (2) Power Inductor |
| (3) Dimension | (4) Product Series (H:High Current Type) |
| (5) Inductance (1R0:1.0uH) | (6) Tolerance (M:±20%) |
| (7) Thickness option(N:Standard, A:Thinner than standard, B:Thicker than standard) | |
| (8) Packaging(C:paper tape, E:embossed tape) | |

RECOMMENDED SOLDERING CONDITION

REFLOW SOLDERING

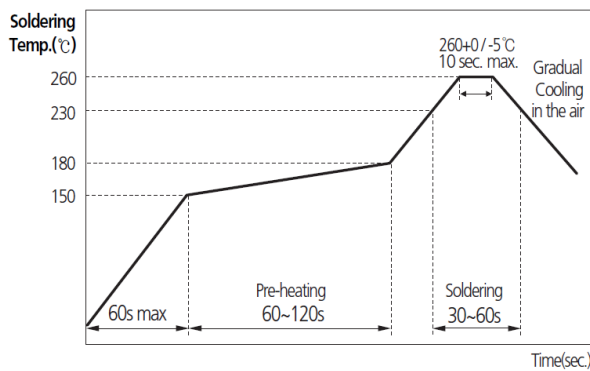

FLOW SOLDERING

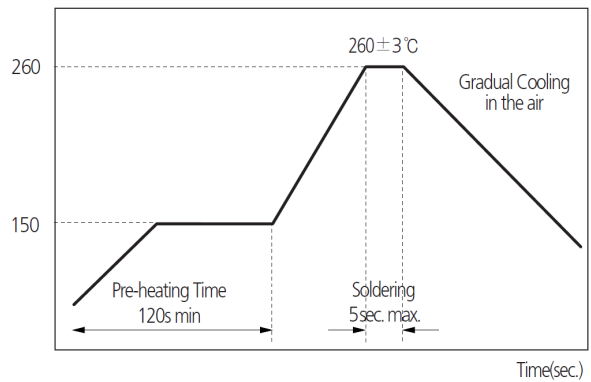

PACKAGING

Packaging Style	Quantity(pcs/reel)
Embossed Taping	3,000



Any data in this sheet are subject to change, modify or discontinue without notice.

The data sheets include the typical data for design reference only. If there is any question regarding the data sheets, please contact our sales personnel or application engineers.