


features

- Surface mount
- Operating temperature: -40°C ~ +125°C
- Flat top suitable for high speed pick-and-place components
- Excellent high frequency applications
- High Q factors and self-resonant frequency values
- Marking: White body color with no marking (0402)
Black body color with white marking (0603, 0805, 1008)
- Products with lead-free terminations meet EU RoHS requirements
- AEC-Q200 Qualified

dimensions and construction

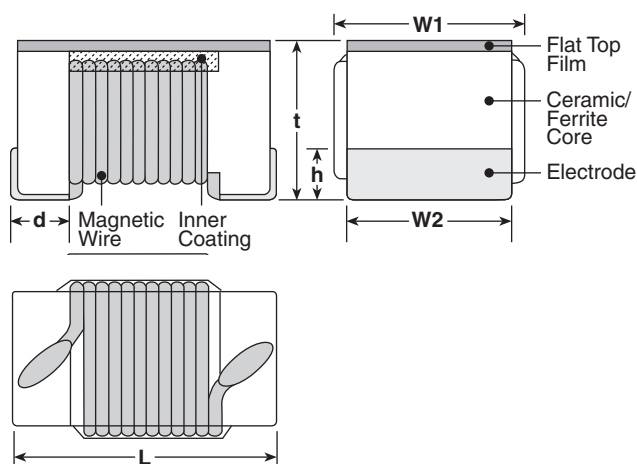

Size Code	Dimensions inches (mm)					
	L	W1	W2	t	h	d
KQT0402	.039±.004 (1.0±0.1)	.02±.004 (0.5±0.1)	.02±.004 (0.5±0.1)	.022±.004 (0.55±0.1)	.006±.004 (0.15±0.1)	.01±.004 (0.25±0.1)
KQ0603	.063±.004 (1.6±0.1)	.039±.004 (1.0±0.1)	.033±.004 (0.85±0.1)	.035±.004 (0.9±0.1)	.01±.006 (0.25±0.15)	.014±.004 (0.35±0.1)
KQ0805	.079±.008 (2.0±0.2)	.059±.008 (1.5±0.2) (3.3nH-390nH)	.053±.004 (1.35±0.1)	.051±.008 (1.3±0.2)	.016±.006 (0.40±0.15)	.018±.004 (0.45±0.1)
		.063±.008 (1.6±0.2) (470nH-820nH)				
KQ1008	.098±.008 (2.5±0.2)	.087±.008 (2.2±0.2)	.079±.004 (2.0±0.1)	.071 ^{+.008} ₋₀ (1.8 ^{+.02} ₋₀)	.018±.006 (0.45±0.15)	.018±.004 (0.45±0.1)

ordering information

New Part #	KQ	1008	T	TE	10N	J
Type	KQ KQT	Size Code 0402 0603 0805 1008	Termination Material T: Sn	Packaging TP: 2mm pitch paper (0402: 10,000 pieces/reel) TD: 7" paper tape (0402: 2,000 pieces/reel) TE: 7" embossed plastic (0603, 0805, 1008: 2,000 pieces/reel)	Nominal Inductance 3 digits: 10N: 10nH R10: 0.1μH 1R0: 1.0μH	Tolerance B: ±0.1nH C: ±0.2nH G: ±2% H: ±3% J: ±5% K: ±10% M: ±20%

For further information on packaging, please refer to Appendix A.

applications and ratings

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency (MHz)	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	
KQT0402T**1N0*	—	1.0	250	B: ±0.1nH C: ±0.2nH	16	250	11000	0.045	1360	
KQT0402T**1N9*		1.9			19		9600	0.070	1040	
KQT0402T**2N0*		2.0								
KQT0402T**2N2*		2.2					8000	0.068	960	
KQT0402T**2N4*		2.4			18			0.120	700	
KQT0402T**2N7*		2.7		H: ±3% J: ±5% K: ±10%	17		7200	0.066	840	
KQT0402T**3N3*		3.3			19					
KQT0402T**3N6*		3.6			6000		0.091	800		
KQT0402T**3N9*		3.9							18	
KQT0402T**4N3*		4.3			20		5800	0.083	760	
KQT0402T**4N7*		4.7								
KQT0402T**5N1*		5.1					4800	0.086	680	
KQT0402T**5N6*		5.6			22					
KQT0402T**6N2*		6.2			5800		0.104	680		
KQT0402T**6N8*		6.8			4400					
KQT0402T**7N5*		7.5			20		4200	0.150	650	
KQT0402T**8N2*		8.2					4160			
KQT0402T**8N7*		8.7			20		4000	0.150	650	
KQT0402T**9N0*		9.0					3900	0.195	480	
KQT0402T**9N5*		9.5			21		3680			
KQT0402T**10N*		10					3600	0.120	640	
KQT0402T**11N*		11			24		3450			
KQT0402T**12N*		12					3280	0.172	560	
KQT0402T**13N*		13					3100			
KQT0402T**15N*		15			25		3040	0.202	480	
KQT0402T**16N*		16					3000	0.250	450	
KQT0402T**18N*		18			24		2800			
KQT0402T**19N*		19					2720	0.214	400	
KQT0402T**20N*		20			25		2700			
KQT0402T**22N*		22					2480	0.298		
KQT0402T**23N*		23			24		2400			
KQT0402T**24N*		24					2320	0.560	320	
KQT0402T**27N*		27			25		2300			
KQT0402T**30N*		30					2240	0.620	320	
KQT0402T**33N*		33			24		2200			
KQT0402T**34N*		34					2100	0.830	150	
KQT0402T**36N*		36			25		2800			
KQT0402T**39N*		39					2000	1.120	200	
KQT0402T**40N*		40			22		1800			
KQT0402T**43N*		43					1600	2.090	130	
KQT0402T**47N*		47					1500			
KQT0402T**51N*		51								
KQT0402T**56N*		56								
KQT0402T**68N*		68								
KQT0402T**82N*		82								
KQT0402T**R10*		100								
KQT0402T**R12*		120								

* Add tolerancing character (B, C, G, H, J, K, M)

** Add packaging code

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/01/14

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency (MHz)	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
KQ0603TTE1N6*	C	1.6	250	J: ±5% K: ±10%	24	250	12500	0.03	700
KQ0603TTE1N8*	0	1.8			16			0.045	
KQ0603TTE3N3*	X	3.3			22		6900	0.055	
KQ0603TTE3N6*	E	3.6						0.063	
KQ0603TTE3N9*	1	3.9						0.08	
KQ0603TTE4N3*	F	4.3					5900	0.063	
KQ0603TTE4N7*	G	4.7			20		5800	0.116	
KQ0603TTE5N1*	Y	5.1						0.115	
KQ0603TTE6N8*	2	6.8			27		4800	0.11	
KQ0603TTE7N5*	H	7.5						0.106	
KQ0603TTE8N2*	A	8.2		28	4600		0.12		
KQ0603TTE8N7*	J	8.7			0.109				
KQ0603TTE9N5*	B	9.5			4800		0.125		
KQ0603TTE10N*	3	10					0.13		
KQ0603TTE11N*	K	11		33	4000		0.086		
KQ0603TTE12N*	4	12					0.13		
KQ0603TTE15N*	5	15		35			0.17		
KQ0603TTE16N*	L	16					34	3300	
KQ0603TTE18N*	6	18		35	3100		0.17		
KQ0603TTE22N*	7	22		38	3000		0.19		
KQ0603TTE23N*	S	23	37	2700	0.15				
KQ0603TTE24N*	M	24		2650	0.135				
KQ0603TTE27N*	8	27		40	2800	0.22			
KQ0603TTE30N*	N	30		37	2250	0.144			
KQ0603TTE33N*	9	33			2300	0.22			
KQ0603TTE36N*	P	36		38	2080	0.25			
KQ0603TTE39N*	0	39			2200				
KQ0603TTE43N*	Q	43		39	2000	0.28			
KQ0603TTE47N*	1	47							
KQ0603TTE51N*	T	51		38	200	1900	0.30		
KQ0603TTE56N*	2	56	0.31						
KQ0603TTE68N*	3	68	37			0.34			
KQ0603TTE72N*	4	72	34	150	1700	0.49			
KQ0603TTE82N*	5	82				0.54			
KQ0603TTER10*	6	100			1400	0.58			
KQ0603TTER11*	7	110	32		1350	0.61			
KQ0603TTER12*	8	120		1300	0.65				
KQ0603TTER15*	9	150		1400	1.4				
KQ0603TTER18*	0	180	100	25	100	1300	2.2	140	
KQ0603TTER20*	U	200				1200	2.3	130	
KQ0603TTER21*	V	210					2.5	120	
KQ0603TTER22*	1	220				1000	2.4		
KQ0603TTER25*	W	250		24	100	900	2.3	170	
KQ0603TTER27*	2	270				840	3.17	110	
KQ0603TTER30*	X	300				30	800	3.0	100
KQ0603TTER33*	3	330					700	3.7	80
KQ0603TTER39*	4	390		640	1.21		190		
KQ0603TTER47*	5	470		610	1.26		170		
KQ0603TTER51*	V	510	50	J: ±5% K: ±10%	50	560	2.09	130	
KQ0603TTER56*	6	560				590	1.89	150	
KQ0603TTER62*	W	620							

* Add tolerance character (B, C, G, H, J, K, M) For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/01/14

applications and ratings (continued)

	Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency (MHz)	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)			
NEW	KQ0603TTER68*	7	680	50	J: ±5% K: ±10%	30	50	540	1.97	140			
	KQ0603TTER72*	C	720					530	2.04	130			
KQ0603TTER75*	X	750	490					3.09	110				
KQ0603TTER82*	8	820	480					2.95	120				
KQ0603TTER91*	Y	910	440					5.13	90				
KQ0603TTE1R0*	9	1000	400					5.45	80				
KQ0603TTE1R2*	0	1200	250					G: ±2% J: ±5% K: ±10%	50	1500	6000	0.08	600
KQ0805TTE3N3*	0	3.3								1000	5500	0.11	
KQ0805TTE6N8*	1	6.8		4700	0.12								
KQ0805TTE12N*	3	12		4000	0.15								
KQ0805TTE15N*	4	15		3400	0.17								
KQ0805TTE18N*	5	18		3300	0.20								
KQ0805TTE20N*	Y	20		55	500	2600	0.22		500				
KQ0805TTE22N*	6	22				2500	0.25						
KQ0805TTE27N*	7	27				2050	0.27						
KQ0805TTE33N*	8	33				2000	0.29						
KQ0805TTE39N*	9	39	60			1650	0.34						
KQ0805TTE43N*	4	43				1550	0.34						
KQ0805TTE47N*	0	47		1450	0.38								
KQ0805TTE56N*	1	56		1300	0.42								
KQ0805TTE68N*	2	68	65	250	1200	0.46	400						
KQ0805TTE82N*	3	82			1100	0.51							
KQ0805TTER10*	4	100			920	0.56							
KQ0805TTER12*	5	120			870	0.64							
KQ0805TTER15*	6	150											
KQ0805TTER16*	H	160											
KQ0805TTER17*	J	170											
KQ0805TTER18*	7	180	100	J: ±5% K: ±10%	50	850	0.70						
KQ0805TTER19*	D	190											
KQ0805TTER20*	E	200											
KQ0805TTER21*	F	210											
KQ0805TTER22*	8	220											
KQ0805TTER23*	K	230											
KQ0805TTER24*	L	240	48	50	650	1.0	350						
KQ0805TTER25*	G	250											
KQ0805TTER27*	9	270											
KQ0805TTER33*	0	330											
KQ0805TTER39*	1	390											
KQ0805TTER47*	2	470											
KQ0805TTER56*	3	560	50	J: ±5% K: ±10%	33	100	375	1.76	250				
KQ0805TTER68*	4	680	25		23	50	340	1.9	230				
KQ0805TTER82*	5	820					188	2.2	190				
KQ1008TTE10N*	10N	10					215	2.35	180				
KQ1008TTE12N*	12N	12		50			J: ±5% K: ±10% M: ±20%	50	500	4100	0.08	1000	
KQ1008TTE15N*	15N	15	3300		0.09								
KQ1008TTE18N*	18N	18	3000		0.10								
KQ1008TTE22N*	22N	22	2500		0.11								
KQ1008TTE27N*	27N	27	350		2400	0.12							
KQ1008TTE33N*	33N	33			1600	0.13							
KQ1008TTE39N*	39N	39			1600	0.14							
KQ1008TTE47N*	47N	47			1500	0.15							
								0.16					

* Add tolerance character (C, G, H, J, K, M) For complete environmental specifications, please refer to www.koaspeer.com
 Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/01/14

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency (MHz)	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	
KQ1008TTE56N*	56N	56	50	G: ±2% J: ±5% K: ±10%	65	350	1300	0.18	1000	
KQ1008TTE68N*	68N	68			60		1000	0.20		
KQ1008TTE82N*	82N	82						0.22		
KQ1008TTER10*	R10	100	25		45	100	1000	0.56	650	
KQ1008TTER12*	R12	120					950	0.63		
KQ1008TTER15*	R15	150					850	0.70		580
KQ1008TTER18*	R18	180					750	0.77	620	
KQ1008TTER22*	R22	220					700	0.84	500	
KQ1008TTER27*	R27	270					600	0.91	500	
KQ1008TTER33*	R33	330					570	1.05	450	
KQ1008TTER39*	R39	390					500	1.12	470	
KQ1008TTER47*	R47	470					450	1.19		
KQ1008TTER56*	R56	560					415	1.33		400
KQ1008TTER62*	R62	620					375	1.40	300	
KQ1008TTER68*	R68	680						1.47	400	
KQ1008TTER75*	R75	750						360	1.54	360
KQ1008TTER82*	R82	820					350	1.61	400	
KQ1008TTER91*	R91	910					7.9	35	50	320
KQ1008TTE1R0*	1R0	1000	290		1.75	370				
KQ1008TTE1R2*	1R2	1200	250		1.6	310				
KQ1008TTE1R5*	1R5	1500	200		1.7	300				
KQ1008TTE1R8*	1R8	1800	28		160	1.9		270		
KQ1008TTE2R2*	2R2	2200			2.2	250				
KQ1008TTE2R7*	2R7	2700	22		25			140	2.3	230
KQ1008TTE3R3*	3R3	3300				110		2.7		
KQ1008TTE3R9*	3R9	3900				20		100	2.8	
KQ1008TTE4R7*	4R7	4700	90					3.1	210	
KQ1008TTE5R6*	5R6	5600	15					7.9	80	2.5
KQ1008TTE6R8*	6R8	6800			70	2.8			200	
KQ1008TTE8R2*	8R2	8200			65	3.0			170	
KQ1008TTE100*	100	10000			60	3.4	150			

* Add tolerance character (C, G, H, J, K, M)

Operating Temperature Range: -40°C ~ +125°C

The operating temperature range of the coil (ambient temperature + self heating) must remain at +125°C or less

environmental applications

Performance Characteristics

Parameter	Requirements Maximum Limit	Δ L/L Δ Q/Q Typical	Test Method
Resistance to Soldering Heat	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±2.7% Δ Q/Q: ±6.6%	260°C ± 5°C, 10s ± 1s
Rapid Change of Temperature	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±2.1% Δ Q/Q: ±5.3%	-40°C (30min.)/ +125°C (30min.) 100 cycles
Low Temperature Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±1.8% Δ Q/Q: ±2.8%	-40°C ± 2°C, 1000h
High Temperature Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±1.8% Δ Q/Q: ±5.3%	125°C ± 2°C, 1000h
Moisture Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±0.9% Δ Q/Q: ±6.9%	40°C ± 2°C, 90%~95%RH, 1000h
Resistance to Solvent	No damage and marking shall remain legible	—	Accordance with MIL-STD 202F Method 215

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/01/14

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KOA Speer:

[KQT0402TTD36NJ](#) [KQ0603TTE6N8G](#) [KQ1008TTE15NJ](#) [KQT0402TTD3N6J](#) [KQ1008TTE27NJ](#) [KQT0402TTD3N9J](#)
[KQ1008TTER47G](#) [KQT0402TTD3N3J](#) [KQ1008TTER82G](#) [KQ1008TTER68G](#) [KQ0603TTE7N5G](#) [KQ1008TTER62G](#)
[KQ0603TTE72NG](#) [KQ1008TTER22G](#) [KQ0603TTE68NG](#) [KQ1008TTER27G](#) [KQ1008TTE2R2G](#) [KQ1008TTER15G](#)
[KQ1008TTE22NJ](#) [KQ1008TTER12G](#) [KQ1008TTER18G](#) [KQ1008TTER10G](#) [KQ1008TTE2R7G](#) [KQ1008TTE10NJ](#)
[KQ1008TTE100G](#) [KQ1008TTER91G](#) [KQ1008TTE18NJ](#) [KQ1008TTER56G](#) [KQT0402TTD27NJ](#) [KQ1008TTER33G](#)
[KQ1008TTER39G](#) [KQ1008TTE1R2G](#) [KQ1008TTE1R8G](#) [KQ1008TTE1R0G](#) [KQ1008TTE1R5G](#) [KQ1008TTE12NJ](#)
[KQ1008TTER75G](#) [KQT0402TTD23NJ](#) [KQ1008TTE6R8G](#) [KQ0603TTE30NG](#) [KQ0805TTE56NG](#) [KQ0603TTE10NG](#)
[KQ0603TTER15G](#) [KQ0603TTER11G](#) [KQ0603TTER10G](#) [KQ0603TTER18G](#) [KQ0603TTER12G](#) [KQ0603TTE22NG](#)
[KQ0603TTE18NJ](#) [KQ0603TTE18NG](#) [KQ1008TTE82NG](#) [KQ1008TTE8R2G](#) [KQ0603TTE24NG](#) [KQ0603TTE36NG](#)
[KQ0603TTE12NG](#) [KQ0603TTE12NJ](#) [KQ0603TTE3N6J](#) [KQ1008TTE68NG](#) [KQ0603TTE3N9J](#) [KQ0603TTE1N8J](#)
[KQ0603TTE1N6J](#) [KQ0603TTER33G](#) [KQ0603TTER39G](#) [KQ0603TTE16NG](#) [KQ0603TTE33NG](#) [KQ0603TTE82NG](#)
[KQ0603TTER27G](#) [KQ0603TTER22G](#) [KQT0402TTD8N2J](#) [KQ0603TTE8N7G](#) [KQ0603TTE39NG](#) [KQT0402TTD9N0J](#)
[KQ0805TTE47NJ](#) [KQ0805TTER82G](#) [KQ0603TTE27NG](#) [KQ1008TTE47NJ](#) [KQT0402TTD5N6J](#) [KQ0603TTE15NJ](#)
[KQ0603TTE15NG](#) [KQT0402TTD40NJ](#) [KQ0603TTE11NG](#) [KQ0805TTE15NJ](#) [KQ0805TTER47G](#) [KQ0805TTE27NJ](#)
[KQ0805TTE39NJ](#) [KQ1008TTE39NJ](#) [KQT0402TTD7N5J](#) [KQ0603LTE3N3J](#) [KQ0805TTE2N8J](#) [KQ0603TTE82NJ](#)
[KQ0603TTER15J](#) [KQ0603TTER18J](#) [KQ0805TTE82NJ](#) [KQ0805TTER56J](#) [KQT0402TTD2N0C](#) [KQ0805TTER22K](#)
[KQT0402TK001-KIT](#) [KQT0402LTD56NJ](#) [KQT0402LTD9N0J](#) [KQ0603TTE8N2G](#)