

Communication Markets Division  
3M™ Scotchlok™ Connectors and Tools



# Proven Solutions for Today's Applications





# A Proven Series of Tools and Connectors from 3M.

50 years ago, 3M introduced the industry's original insulation displacement connector—the 3M™ Scotchlok™ Connector UR. Today, with increased demand for high-speed and high-bandwidth networks, the complete series of 3M connectors and tools has evolved again. We've leveraged new technologies while building on the original successful design, shape, color-coded cap concepts and element configuration. With the Scotchlok series of tools and connectors from 3M, service providers can meet the demand for enhanced customer services such as high speed internet, video-on-demand and video conferencing. 3M™ Scotchlok™ Connectors additionally offer full wire-range capability, increased port size to accommodate up to 2.08 mm (0.082 in.) insulation sizes, double elements in all products and solvent resistant plastic construction.

As new technologies migrate into the local loop, the importance of reliable connections in the embedded plant has increased exponentially. Each connection is a potential point of failure in high-bandwidth applications which could require additional time and expense for a technician to repair. That is where the full line of 3M™ Scotchlok™ Connectors really makes a difference.

## 3M™ Scotchlok™ Butt Connectors

Scotchlok butt connectors employ a specially designed, wire insulation displacement contact to make a reliable electrical connection to each wire. A “live-spring” joint is made by driving the wire down into the “U” contact connector. This simple process displaces the insulation and grasps all conductors with a firm, resilient pressure, all in one motion. No stripping of wire insulation required. Scotchlok butt connectors include a factory-installed sealant to protect against corrosion and seal out moisture. They are also available in a dry/flame retardant version for central office and vault. A variety of sizes and wire combinations are available to accommodate almost any need.

### 3M™ Scotchlok™ Butt Connector UR

The UR connector accepts two or three solid copper conductors for butt splicing. The connector is filled with a sealant to provide moisture resistance. RUS Listed.



### 3M™ Scotchlok™ Butt Connector UY

The small size of the UY connector reduces the splicing bundle O.D. to a minimum. The connector's two ports accept two solid copper conductors. The connector is filled with a sealant to provide moisture resistance. RUS Listed.



### 3M™ Scotchlok™ Butt Connector UR2/UR2-D

The UR2/UR2-D, solvent resistant connectors, accept two or three solid copper conductors that can be of different wire gauges, for butt splicing. The UR2 connectors are filled with a sealant to provide moisture resistance. The UR2-D connector is a dry version. RUS Listed.



### 3M™ Scotchlok™ Butt Connector UY2/UY2-D

The small size of the UY2/UY2-D, solvent resistant connectors, reduce the splicing bundle O.D. to a minimum. Their two ports accept two solid copper conductors that can be of different wire gauges. The connector is filled with a sealant to provide moisture resistance. In addition, the UY2 connector is available in a dry version, UY2-D connector. RUS Listed.



### 3M™ Scotchlok™ Butt Connector UAL

The UAL connector is a sealed, moisture-resistant two- or three-wire connector. Outside ports accept solid-copper, aluminum, or a combination of both. RUS Listed.



### **3M™ Scotchlok™ Butt Connector UYF (OUS only)**

The UYF connector employs a specially designed insulation displacement contact which makes an electrical connection to each wire. The connector is filled with a sealant to provide moisture resistance. The small size of the UYF connector reduces the splicing bundle O.D. to a minimum.



### **3M™ Scotchlok™ Butt Connector UP2**

The UP2 connector is a dry, flame-retardant two-wire UL-Listed connector for use on paper, pulp or PIC cable where moisture resistance is not needed. RUS Listed.




### **3M™ Scotchlok™ Clearing Cap UCC**

Each moisture-resistant UCC clearing cap isolates a full cable pair. The conductors are held rigidly in place with a plastic blade. The UCC accepts two-wire combinations. RUS Listed.




### **3M™ Scotchlok™ Trim-out Connector 211**

The 211 trim-out connector is a moisture-resistant, self-stripping insulation displacement connector with a built-in cut-off blade and a test port. Wires are positioned in the connector from the sides, allowing the 211 connector to be used without interrupting service. The 211 connector may also be used for standard two-wire butt type splicing operations. RUS Listed.



### **3M™ Scotchlok™ Butt Connector UP3**

The UP3 connector is a dry, flame-retardant two- or three-wire connector for paper, pulp or PIC cable where moisture resistance is not needed. UL Listed.



### **3M™ Scotchlok™ Self-Stripping Dropwire Connector 557TG**

Use the 557TG aerial dropwire connector to electrically connect two solid copper conductors, insulate the connection and provide moisture protection.



### **3M™ Scotchlok™ Clearing Cap UPC**

The UPC connector is a UL-listed dry, flame-retardant version of the UCC clearing cap making it suitable for use in buildings. RUS Listed.



## 3M™ Scotchlok™ Tap Connectors

Scotchlok tap connectors are real time savers. They enable the user to tap into another wire without interrupting service. A U-shaped element inside each connector displaces insulation material and makes contact with the copper conductor. Scotchlok tap connectors also include factory-installed sealant to protect against corrosion and seal out moisture. They are also available in a dry version for central office and vault. Scotchlok tap connectors are fast to install, easy to work with and available in a wide range of common wire gauges. Tap connectors allow direct tapping into existing solid copper conductors without interrupting service. The pre-crimp feature helps hold the wires in place until the connector is crimped and the splice is complete.

### 3M™ Scotchlok™ Tap Connector UG

The UG connector is a sealed two-wire connector for solid copper, air core, or filled cable. The connector is filled with a sealant to provide moisture resistance. 3M™ Scotchlok™ Butt Connector UP2. RUS Listed.




### 3M™ Scotchlok™ Tap Connector UPB

The UPB connector is a dry, flame-retardant two-wire UL-Listed connector with a pre-crimp feature for use on pulp, paper or PIC cable where moisture resistance is not needed. RUS Listed.



### 3M™ Scotchlok™ Tap Connector UB2A/UB2A-D

The UB2A/UB2A-D connectors have a pre-crimp feature that gives the craftsperson a time-saving edge. By positioning the connector on the conductor and pre-crimping, the conductor is prevented from slipping out of the connector before the crimp is completed. A factory sealant protects against corrosion and seals out moisture. In ready-access closures, these connectors help eliminate cutting cable pairs, opening circuits, and piecing out wires. The UB2A-D connector is a dry version of the UB2A. RUS Listed.

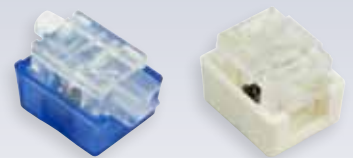


# 3M™ Scotchlok™ Inline Connectors

Scotchlok inline connectors are a safe and simple way to make a secure connection. These full-pair, sealed, moisture-resistant connectors are designed to accommodate a wide range of wire ranges in copper or copper-coated steel conductors.

## 3M™ Scotchlok™ Inline Connector U1B

The U1B connector is a sealed moisture-resistant four-wire (1 full pair) inline connector for larger gauge solid copper. AWG 19-16 solid copper conductors.



## 3M™ Scotchlok™ Inline Connector U1R

The U1R connector is a sealed moisture-resistant four-wire (1 full pair) inline connector for larger gauge solid copper. AWG 24-19 solid copper conductors.



## 3M™ Scotchlok™ Inline Connector UDW2

A sealed moisture-resistant, four-wire (1 full pair) inline aerial dropwire connector for copper or copper-coated steel conductors. This inline connector is for mid-span splices where strain-relief is provided. Tape over-wrap is not required. RUS Listed.



Built to do the  
job right, and  
do it fast.



# 3M™ Scotchlok™ Tools

To complement our line of efficient, reliable 3M™ Scotchlok Connectors, 3M™ Scotchlok™ Crimping Tools are built to do the job right, and do it fast. All Scotchlok tools are engineered to fit comfortably in hand while providing high mechanical advantage for less operator fatigue. From automatic cartridges to adjustable jaws, there's a tool designed to meet your specific application needs.

## 3M™ Scotchlok™ Cartridge Tool E-9C with Case and Gauge

With an automatic cartridge feed, 7-to-1 mechanical advantage and ratchet action, the E-9C tool allows the craftsperson to complete a crimp with one hand, freeing the other hand for wire handling. The tool is designed for cartridges with Scotchlok butt connectors.



## 3M™ Scotchlok™ Crimping Tool E-9BM

This heavy-duty tool is capable of crimping all Scotchlok connectors. Its parallel closing action and adjustable jaws provide a 10-to-1 mechanical advantage, allowing it to handle all wire gauges.




## 3M™ Scotchlok™ Crimping Tool E-9E

A completely parallel closing action and a 4-to-1 mechanical advantage make the lightweight E-9E crimping tool a versatile addition to any craftsperson's pouch. With these features, the E-9E tool will crimp all Scotchlok butt and tap connectors in all wire gauges.



## 3M™ Scotchlok™ Crimping Tool E-9Y

The E-9Y tool has stepped jaws and a long nose and side wire cutter which provide crimping action for two- or three-conductor splicing. The E-9Y tool can be purchased individually or in combination with a mesh pouch (E-9Y-P). The E-9Y tool is not recommended for 19 gauge (0.9 mm) and larger conductors.



## 3M™ Scotchlok™ Crimping Tool E-9R

This tool features parallel crimping and a 10-to-1 mechanical advantage. Its ratchet-release and integrated wire cutter save time by not having to change tools. The E-9R tool is compatible with all Scotchlok connectors (except inline and drop connectors) across the entire range of applicable wire sizes.



## 3M™ Scotchlok™ Crimping Tool E-9J

The E-9J tool is a lightweight, handheld tool featuring a single-stroke, parallel crimping action with a work-saving 10-to-1 mechanical advantage over applied hand force. For use with Scotchlok butt and tap connectors.




# 3M™ Scotchlok™ Connectors and Tools Specification Chart

| Connector                                                                                              | Type Connector                                                                      | Special Features                                                   | Maximum Insulation O.D.                        |                                                  | PIC-unfilled and PIC-filled |                          | Pulp or paper |             |
|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------|--------------------------------------------------|-----------------------------|--------------------------|---------------|-------------|
|                                                                                                        |                                                                                     |                                                                    | Metric (mm)                                    | Inches                                           | AWG                         | Metric (mm)              | AWG           | Metric (mm) |
| <b>UR2</b><br>        |    | Gel-filled<br>Polypropylene<br>Cat. 5<br>RUS Listed                | 2.08                                           | 0.082                                            | 26-19                       | 0.4-0.9                  | N/A           | N/A         |
| <b>UR2-D</b><br>      |    | Dry<br>Polypropylene<br>RUS Listed                                 | 2.08                                           | 0.082                                            | 26-19                       | 0.4-0.9                  | 26-19         | 0.4-0.9     |
| <b>UR</b><br>         |    | Gel-filled<br>Polycarbonate<br>Cat. 5<br>RUS Listed                | 1.67                                           | 0.066                                            | 26-19                       | 0.4-0.9                  | N/A           | N/A         |
| <b>UY2</b><br>        |    | Gel-filled<br>Polypropylene<br>Cat. 5<br>RUS Listed                | 2.08                                           | 0.082                                            | 26-19                       | 0.4-0.9                  | N/A           | N/A         |
| <b>UY2-D</b><br>      |    | Dry<br>Polypropylene<br>RUS Listed                                 | 2.08                                           | 0.082                                            | 26-19                       | 0.4-0.9                  | 26-19         | 0.4-0.9     |
| <b>UY</b><br>        |   | Gel-filled<br>Polycarbonate<br>Cat. 5<br>RUS Listed                | 1.67                                           | 0.066                                            | 26-22                       | 0.4-0.7                  | N/A           | N/A         |
| <b>*557-TG2</b><br> |  | Gel-filled<br>Polypropylene                                        | 3.0                                            | 0.12                                             | 22-16                       | 0.6-1.3                  | N/A           | N/A         |
| <b>UYF</b><br>      |  | Gel-filled<br>Polycarbonate                                        | 1.52                                           | 0.060                                            | 26-20                       | 0.4-0.8                  | N/A           | N/A         |
| <b>UP2</b><br>      |  | Dry<br>Polycarbonate<br>Flame Retardant<br>RUS Listed<br>UL Listed | 1.52                                           | 0.060                                            | 26-22                       | 0.4-0.7                  | 26-22         | 0.4-0.7     |
| <b>UP3</b><br>      |  | Dry<br>Polycarbonate<br>Flame Retardant<br>UL Listed               | 1.67                                           | 0.066                                            | 26-19                       | 0.4-0.9                  | 26-19         | 0.4-0.9     |
| <b>UAL</b><br>      |  | Gel-filled<br>For Aluminum<br>Polycarbonate<br>RUS Listed          | Outside<br>Ports: 2.08<br>Middle<br>Port: 1.88 | Outside<br>Ports: 0.082<br>Middle<br>Port: 0.074 | 20-17 AL<br>24-19 CU        | 0.8-1.2 AL<br>0.5-0.9 CU | N/A           | N/A         |
| <b>211</b><br>      |  | Gel-filled<br>Polypropylene<br>Cat. 5<br>RUS Listed                | 2.08                                           | 0.082                                            | 26-19                       | 0.4-0.9                  | N/A           | N/A         |

Butt Splicing

\*557-TG2 connectors can only be used with 3M™ Scotchlok™ Crimp Tool E-9BM or E-9J.

# 3M™ Scotchlok™ Connectors and Tools Specification Chart

| Connector                                                                                          | Type Connector                                                                      | Special Features                                                   | Maximum Insulation O.D. |                | PIC-unfilled and PIC-filled |                    | Pulp or paper |             |
|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|-------------------------|----------------|-----------------------------|--------------------|---------------|-------------|
|                                                                                                    |                                                                                     |                                                                    | Metric (mm)             | Inches         | AWG                         | Metric (mm)        | AWG           | Metric (mm) |
| <b>UB2A</b><br>   |    | Gel-filled<br>Polypropylene<br>Cat. 5<br>RUS Listed                | 2.08                    | 0.082          | 26-19                       | 0.4-0.9            | N/A           | N/A         |
| <b>UB2A-D</b><br> |    | Dry<br>Polypropylene<br>RUS Listed                                 | 2.08                    | 0.082          | 26-19                       | 0.4-0.9            | 26-19         | 0.4-0.9     |
| <b>UG</b><br>     |    | Gel-filled<br>Polycarbonate<br>RUS Listed                          | Butt 1.67<br>Tap 1.12   | 0.066<br>0.044 | 26-19<br>26-22              | 0.4-0.9<br>0.4-0.7 | N/A           | N/A         |
| <b>UPB</b><br>    |    | Dry<br>Polycarbonate<br>Flame Retardant<br>RUS Listed<br>UL Listed | 1.27                    | 0.050          | 26-22                       | 0.4-0.7            | 26-22         | 0.4-0.7     |
| <b>*UDW2</b><br>  |    | Full Pair<br>Drop Pair<br>Polycarbonate<br>RUS Listed              | 4.4                     | 0.175          | 19-16                       | 0.9-1.3            | N/A           | N/A         |
| <b>*U1B</b><br>  |    | Gel-filled<br>Full Pair<br>Polycarbonate                           | 3.18                    | 0.125          | 19-16                       | 0.9-1.3            | N/A           | N/A         |
| <b>*U1R</b><br> |  | Gel-filled<br>Full Pair<br>Polycarbonate                           | 3.18                    | 0.125          | 24-19                       | 0.5-0.9            | N/A           | N/A         |
| <b>UCC</b><br>  |  | Gel-filled<br>Polycarbonate<br>RUS Listed                          | 1.52                    | 0.060          | 26-22                       | 0.4-0.7            | N/A           | N/A         |
| <b>UPC</b><br>  |  | Dry<br>Polycarbonate<br>Flame Retardant<br>RUS Listed<br>UL Listed | 1.52                    | 0.060          | 26-22                       | 0.4-0.7            | 26-22         | 0.4-0.7     |

Tap Splicing

Inline Splicing

Clear/Cap Only

To reduce fatigue, use tool within each group with highest mechanical advantage, indicated in ( ).



**E-9BM**  
(10:1)



**E-9C**  
(7:1)



**E-9E**  
(4:1)



**E-9Y\*\***  
(3:1)



**E-9R**  
(10:1)



**E-9J**  
(10:1)

\*Inline and drop wire connectors can only be used with 3M™ Scotchlok™ Crimp Tool E-9BM.

\*\*Not recommended for 19 gauge (0.9 mm) conductor and larger.

## 3M™ Scotchlok™ Connectors and Tools Ordering Information

| Connector    | Box Packaging<br>Weight kg (lbs.)<br>Minimum Order<br>UPC Code                  | Bulk Packaging<br>Weight kg (lbs.)<br>Minimum Order<br>UPC Code                 | Cartridge Packaging<br>Weight kg (lbs.)<br>Minimum Order<br>UPC Code                     | Jar Packaging<br>Weight kg (lbs.)<br>Minimum Order<br>UPC Code                 | Clamshell Packaging<br>Weight kg (lbs.)<br>Minimum Order<br>UPC Code         |
|--------------|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| <b>UR2</b>   | 100/box, 1000/cs.<br>1.36 (3)<br>Min. Order: 1000 connectors<br>054007-68538    | 500/box, 5000/cs.<br>6.7 (15.2)<br>Min. Order: 5000 connectors<br>054007-56390  | 10/cart, 100/pak., 1000/cs.<br>2.09 (4.6)<br>Min. Order: 1000 connectors<br>054007-68541 | 500/box, 5000/cs.<br>5.9 (13.1)<br>Min. Order: 5000 connectors<br>051115-22977 | 25/Pak, 1000/cs.<br>1.8 (3.9)<br>Min. Order: 1000 connectors<br>051115-22985 |
| <b>UR2-D</b> | N/A<br>N/A<br>N/A<br>N/A                                                        | 500/box, 5000/cs.<br>6.7 (15.2)<br>Min. Order: 5000 connectors<br>054007-33277  | 10/cart, 100/pak., 1000/cs.<br>2.09 (4.6)<br>Min. Order: 1000 connectors<br>054007-27816 | N/A<br>N/A<br>N/A<br>N/A                                                       | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>UR</b>    | 100/box, 1000/cs.<br>1.36 (3)<br>Min. Order: 1000 connectors<br>054007-68537    | 500/box, 5000/cs.<br>6.7 (15.2)<br>Min. Order: 5000 connectors<br>054007-68535  | 10/cart, 100/pak., 1000/cs.<br>2.09 (4.6)<br>Min. Order: 1000 connectors<br>054007-68534 | N/A<br>N/A<br>N/A<br>N/A                                                       | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>UY2</b>   | 100/box, 1000/cs.<br>0.9 (1.3)<br>Min. Order: 1000 connectors<br>054007-14911   | 1000/box, 5000/cs.<br>2.8 (6.1)<br>Min. Order: 5000 connectors<br>054007-33278  | 12/cart, 120/pak., 1200/cs.<br>1.4 (3.5)<br>Min. Order: 1200 connectors<br>054007-27817  | 500/Jar, 5000/cs.<br>3.8 (8.3)<br>Min. Order: 5000 connectors<br>051115-22979  | 25/Pak, 1000/cs.<br>1.3 (2.8)<br>Min. Order: 1000 connectors<br>051115-22984 |
| <b>UY2-D</b> | N/A<br>N/A<br>N/A<br>N/A                                                        | 1000/box, 5000/cs.<br>2.8 (6.1)<br>Min. Order: 5000 connectors<br>051138-57359  | 12/cart, 120/pak., 1200/cs.<br>1.4 (3.5)<br>Min. Order: 1200 connectors<br>054007-71478  | N/A<br>N/A<br>N/A<br>N/A                                                       | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>UY</b>    | 100/box, 1000/cs.<br>0.9 (1.3)<br>Min. Order: 1000 connectors<br>054007-14911   | 1000/box, 5000/cs.<br>2.8 (6.1)<br>Min. Order: 5000 connectors<br>054007-33278  | 16/cart, 160/pak., 1600/cs.<br>1.4 (3.5)<br>Min. Order: 1600 connectors<br>054007-27817  | N/A<br>N/A<br>N/A<br>N/A                                                       | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>557TG</b> | N/A<br>N/A<br>N/A<br>N/A                                                        | 500/bag, 5000/box<br>9.09 (20)<br>Min. Order: 5000 connectors<br>051138-57359   | N/A<br>N/A<br>N/A<br>N/A                                                                 | N/A<br>N/A<br>N/A<br>N/A                                                       | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>UYF</b>   | 500/box, 2500/cs.<br>2.15 (4.75)<br>Min. Order: 2500 connectors<br>051115-18516 | N/A<br>N/A<br>N/A<br>N/A                                                        | N/A<br>N/A<br>N/A<br>N/A                                                                 | N/A<br>N/A<br>N/A<br>N/A                                                       | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>UP2</b>   | N/A<br>N/A<br>N/A<br>N/A                                                        | 1000/box, 5000/cs.<br>2.4 (5.4)<br>Min. Order: 5000 connectors<br>054007-33420  | 16/cart, 160/pak., 1600/cs.<br>1.4 (3.2)<br>Min. Order: 1600 connectors<br>054007-32698  | N/A<br>N/A<br>N/A<br>N/A                                                       | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>UP3</b>   | N/A<br>N/A<br>N/A<br>N/A                                                        | 1000/box, 5000/cs.<br>7.1 (13.3)<br>Min. Order: 5000 connectors<br>054007-33419 | 10/cart, 100/pak., 1000/cs.<br>2.0 (4.4)<br>Min. Order: 1000 connectors<br>054007-32700  | N/A<br>N/A<br>N/A<br>N/A                                                       | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>UAL</b>   | N/A<br>N/A<br>N/A<br>N/A                                                        | N/A<br>N/A<br>N/A<br>N/A                                                        | 10/cart, 100/pak., 1000/cs.<br>2.1 (4.7)<br>Min. Order: 1000 connectors<br>054007-27828  | N/A<br>N/A<br>N/A<br>N/A                                                       | N/A<br>N/A<br>N/A<br>N/A                                                     |

| TOOLS                   | E-9BM<br>CRIMPING TOOL | E-9C<br>CARTRIDGE TOOL | E-9R<br>CRIMPING TOOL        | E-9E<br>CRIMPING TOOL     | E-9Y<br>CRIMPING TOOL*       | E-9Y-P<br>CRIMPING TOOL      | E-9J<br>CRIMPING TOOL        |
|-------------------------|------------------------|------------------------|------------------------------|---------------------------|------------------------------|------------------------------|------------------------------|
| Packaging kg (lbs.)/cs. | 4.3 (9.5)              | 1/cs., 0.91 (2)        | 1/bag, 10/cs.,<br>2.59 (5.7) | 1/bag, 10/cs.,<br>2.7 (6) | 1/bag, 10/cs., 1.53<br>(3.3) | 1/bag, 10/cs., 1.53<br>(3.3) | 1/bag, 10/cs.,<br>4.1 (9.02) |
| Minimum Order           | 10 each                | 1 each                 | 10 each                      | 10 each                   | 10 each                      | 10 each                      | 10 each                      |
| UP Code                 | 054007-33482           | 054007-34211           | 051138-87649                 | 054007-10577              | 054007-15625                 | 051115-22987                 | 051115-19004                 |

\*Not recommended for 19 AWG and larger.

## 3M™ Scotchlok™ Connectors and Tools Ordering Information

| Connector     | Box Packaging<br>Weight kg (lbs.)<br>Minimum Order<br>UPC Code                 | Bulk Packaging<br>Weight kg (lbs.)<br>Minimum Order<br>UPC Code                | Cartridge Packaging<br>Weight kg (lbs.)<br>Minimum Order<br>UPC Code                    | Jar Packaging<br>Weight kg (lbs.)<br>Minimum Order<br>UPC Code                | Clamshell Packaging<br>Weight kg (lbs.)<br>Minimum Order<br>UPC Code         |
|---------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| <b>211</b>    | 100/box, 1000/cs.<br>1.2 (2.6)<br>Min. Order: 1000 connectors<br>054007-34079  | N/A<br>N/A<br>N/A<br>N/A                                                       | N/A<br>N/A<br>N/A<br>N/A                                                                | N/A<br>N/A<br>N/A<br>N/A                                                      | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>UB2A</b>   | 100/box, 1000/cs.<br>1.2 (2.6)<br>Min. Order: 1000 connectors<br>054007-92693  | 500/box, 5000/cs.<br>6.7 (15.2)<br>Min. Order: 5000 connectors<br>054007-33277 | N/A<br>N/A<br>N/A<br>N/A                                                                | N/A<br>N/A<br>N/A<br>N/A                                                      | 25/Pak, 1000/cs.<br>1.5 (3.4)<br>Min. Order: 1000 connectors<br>051115-22886 |
| <b>UB2A-D</b> | 100/box, 1000/cs.<br>1.2 (2.6)<br>Min. Order: 1000 connectors<br>054007-92694  | 500/box, 5000/cs.<br>6.7 (15.2)<br>Min. Order: 5000 connectors<br>054007-68535 | N/A<br>N/A<br>N/A<br>N/A                                                                | N/A<br>N/A<br>N/A<br>N/A                                                      | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>UG</b>     | 100/box, 1000/cs.<br>1.1 (2.5)<br>Min. Order: 1000 connectors<br>054007-56391  | 1000/box, 5000/cs.<br>2.8 (6.1)<br>Min. Order: 5000 connectors<br>054007-33278 | N/A<br>N/A<br>N/A<br>N/A                                                                | 500/Jar, 5000/cs.<br>3.8 (8.3)<br>Min. Order: 5000 connectors<br>051115-22979 | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>UPB</b>    | 100/box, 1000/cs.<br>0.6 (1.4)<br>Min. Order: 1000 connectors<br>054007-34173  | 1000/box, 5000/cs.<br>2.8 (6.1)<br>Min. Order: 5000 connectors<br>051138-57359 | N/A<br>N/A<br>N/A<br>N/A                                                                | N/A<br>N/A<br>N/A<br>N/A                                                      | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>UDW2</b>   | 25/bag, 100/box<br>N/A<br>Min. Order: 1000 connectors<br>051138-11505          | N/A<br>N/A<br>N/A<br>N/A                                                       | N/A<br>N/A<br>N/A<br>N/A                                                                | N/A<br>N/A<br>N/A<br>N/A                                                      | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>U1B</b>    | 100/box, 1000/cs.<br>7.3 (16.0)<br>Min. Order: 5000 connectors<br>054007-71340 | N/A<br>N/A<br>N/A<br>N/A                                                       | N/A<br>N/A<br>N/A<br>N/A                                                                | N/A<br>N/A<br>N/A<br>N/A                                                      | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>U1R</b>    | 100/box, 1000/cs.<br>7.4 (16.2)<br>Min. Order: 2500 connectors<br>054007-56388 | N/A<br>N/A<br>N/A<br>N/A                                                       | N/A<br>N/A<br>N/A<br>N/A                                                                | N/A<br>N/A<br>N/A<br>N/A                                                      | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>UCC</b>    | N/A<br>N/A<br>N/A<br>N/A                                                       | N/A<br>N/A<br>N/A<br>N/A                                                       | 16/cart, 160/pak., 1600/cs.<br>1.6 (3.5)<br>Min. Order: 1600 connectors<br>054007-31734 | 500/Jar, 5000/cs.<br>2.8 (6.1)<br>Min. Order: 5000 connectors<br>051115-22980 | N/A<br>N/A<br>N/A<br>N/A                                                     |
| <b>UPC</b>    | N/A<br>N/A<br>N/A<br>N/A                                                       | N/A<br>N/A<br>N/A<br>N/A                                                       | 16/cart, 160/pak., 1600/cs.<br>1.5 (3.0)<br>Min. Order: 1600 connectors<br>054007-33721 | N/A<br>N/A<br>N/A<br>N/A                                                      | N/A<br>N/A<br>N/A<br>N/A                                                     |

\*Not recommended for 19 AWG and larger.

To order, call 800/426 8688. For more information, please contact your local 3M Representative.

All products contained herein are RoHS compliant. "RoHS Compliant 2002/95/EC" means that the product or part ("Product") does not contain any of the substances in excess of the maximum concentration values in EU Directive 2002/95/EC, as amended by Commission Decision 2005/618/EC, unless the substance is in an application that is exempt under EU RoHS. This information represents 3M's knowledge and belief, which may be based in whole or in part on information provided by third party suppliers to 3M.



3M and Scotchlok are trademarks of 3M Company. All other trademarks are owned by their respective companies.

## Important Notice

### Warranty Statement

**3M™ Scotchlok™ connectors and tools are engineered to work together to achieve consistently superior performance in the field. Tools from other manufacturers may not meet the tight quality tolerances of 3M tools and may damage the crimping and performance of a 3M connector. Therefore, the published 3M warranty does not extend to any 3M connectors crimped in tools not made by 3M. The warranty on 3M Scotchlok splicing tools can also be voided if used on non-3M connectors.**

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

### Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture at the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**



### Communication Markets Division

6801 River Place Blvd.  
Austin, TX 78726-9000  
800/426 8688  
Fax 800/626 0329  
[www.3Mcom/Telecom](http://www.3Mcom/Telecom)

Please recycle. Printed in USA.  
© 3M 2012. All rights reserved.  
80-6113-8340-9