
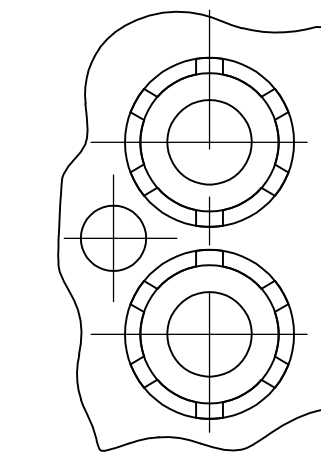
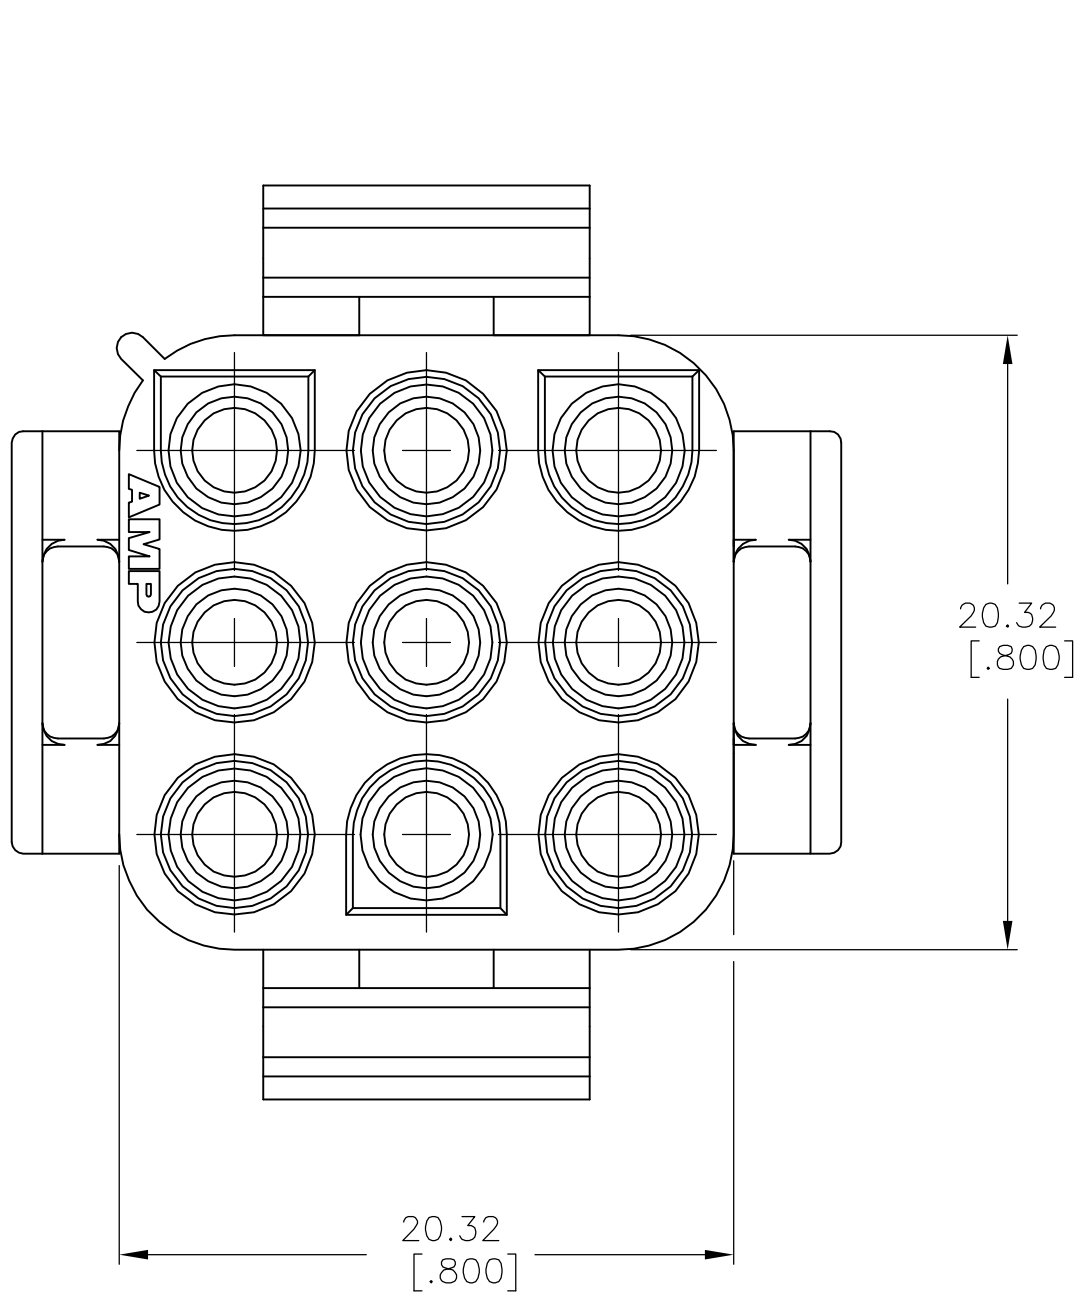
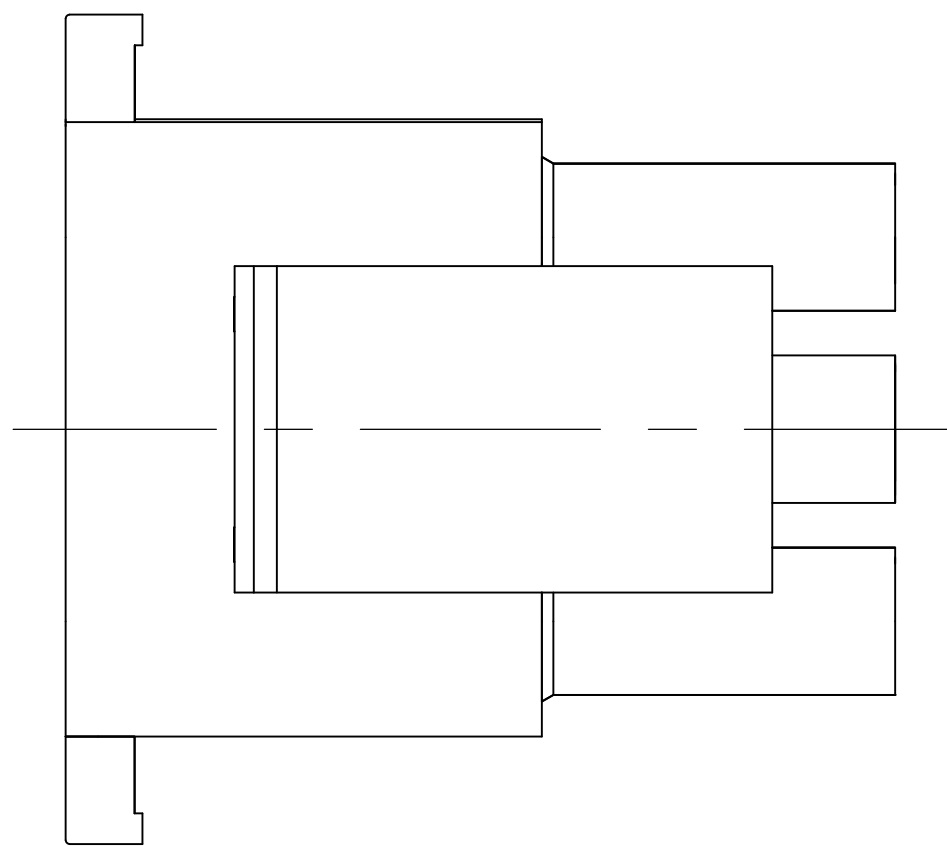
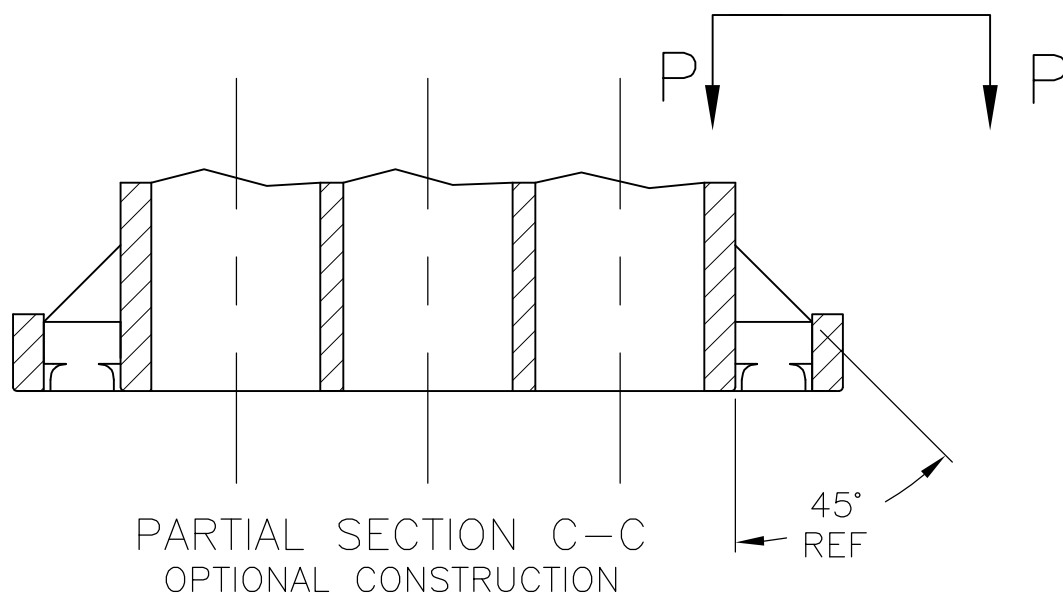
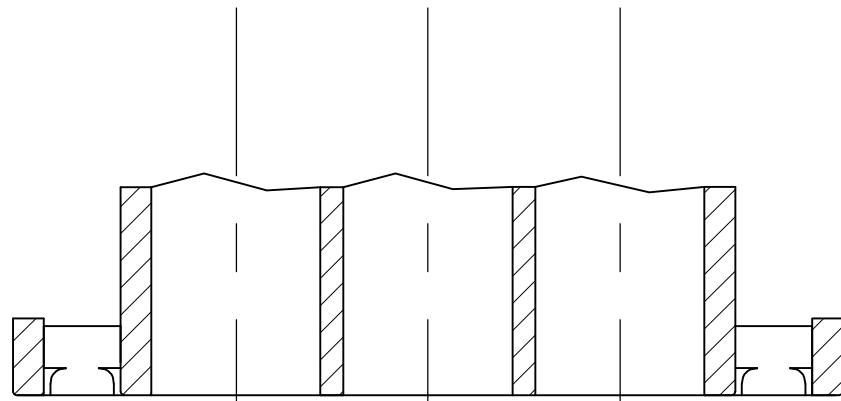



LOC		DIST		REVISIONS					
CM	00	P	LTR	DESCRIPTION			DATE	DWN	APVD
			AL1	REVISED PER ECR-17-008392			26JUN2017	BW	KR

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
2. SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
3. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

4. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
5. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

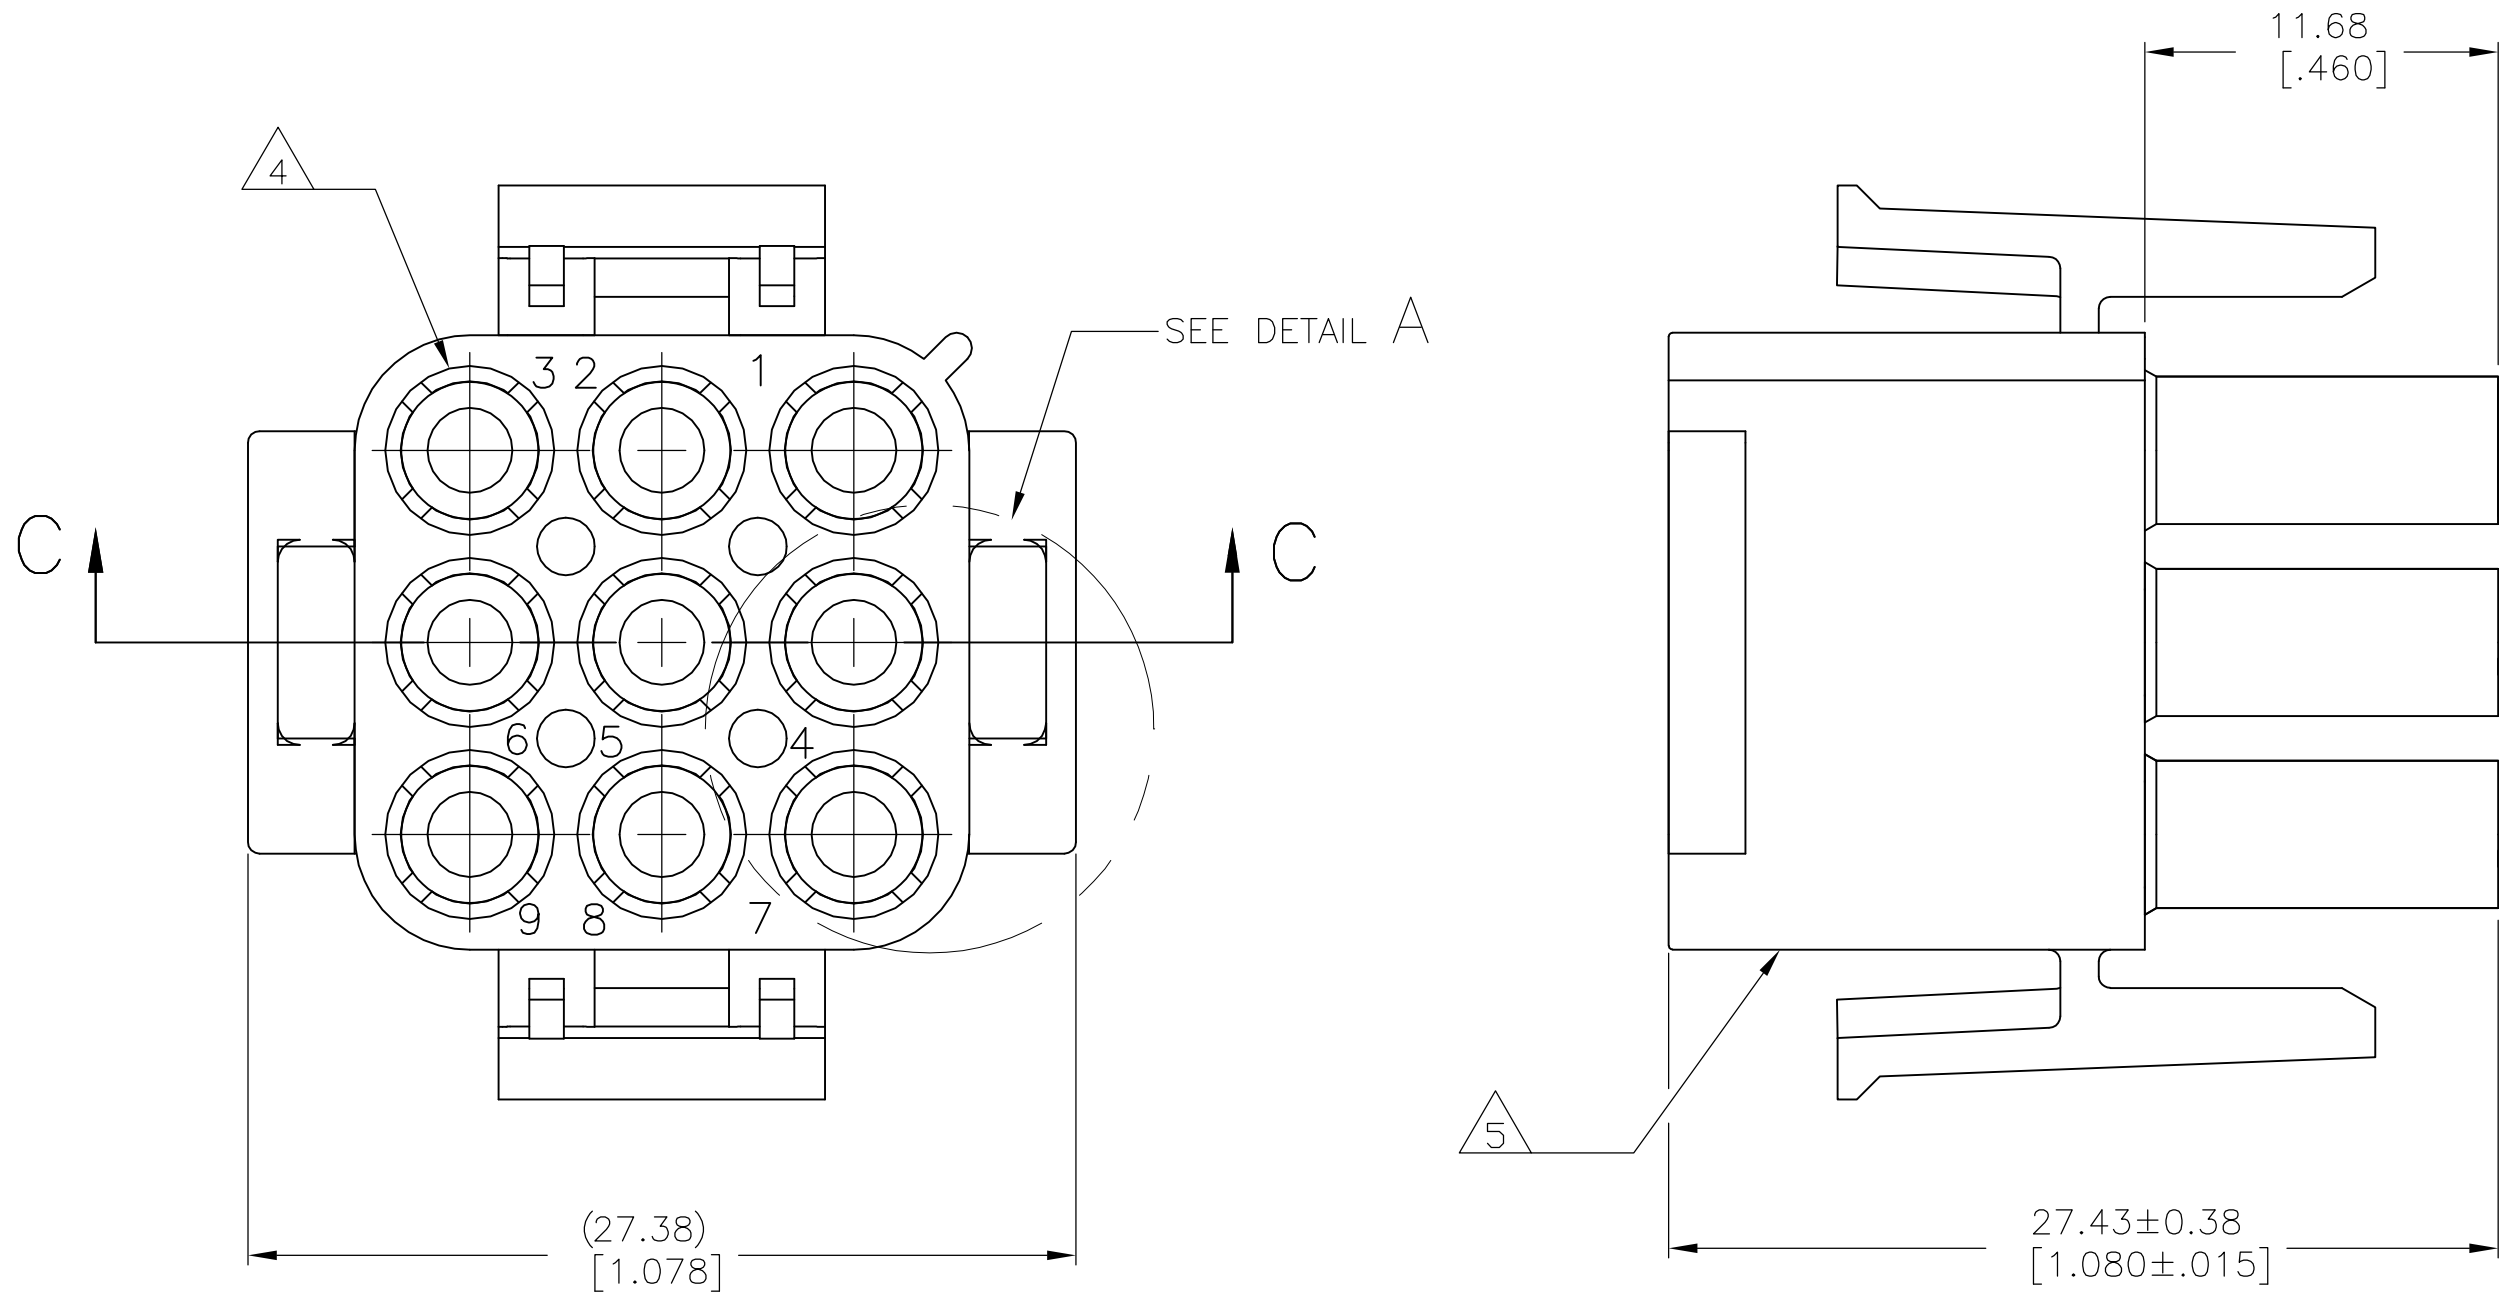

PARTIAL DETAIL A
OPTIONAL CONSTRUCTIONS





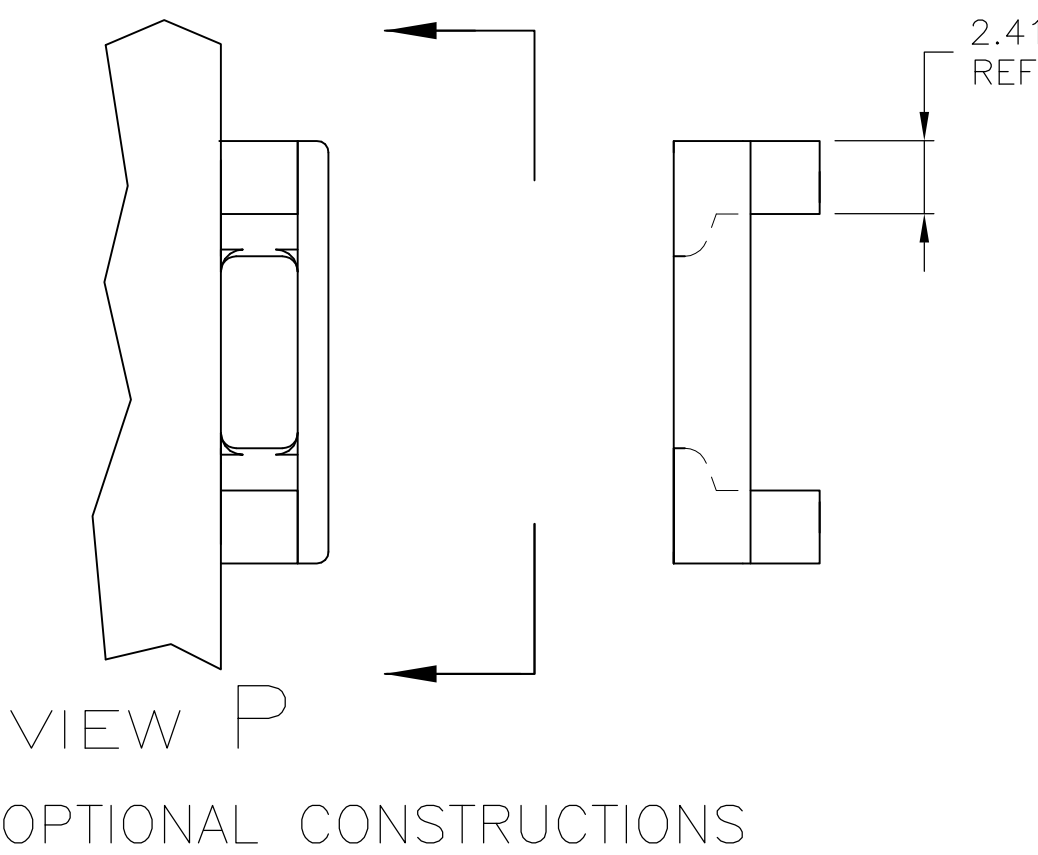


6	SUPERCEDED BY 1-480706-0	OBSOLETE	BLACK	1-480706-9
			GRAY	1-480706-8
			BLUE	1-480706-6
			GREEN	1-480706-5
			YELLOW	1-480706-4
			ORANGE	1-480706-3
			RED	1-480706-2
			BROWN	1-480706-1
			NATURAL	1-480706-0
			COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 01SEP04	 TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK S. RIDGILL 01SEP04	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL 01SEP04	PLUG, 9 CIRCUIT, UNIVERSAL MATE-N-LOK™	
		PRODUCT SPEC	RESTRICTED TO	
0 PLC ± -		APPLICATION SPEC	SIZE	
1 PLC ± -		WEIGHT	CAGE CODE	
2 PLC ± 0.13 [.005]			DRAWING NO	
3 PLC ± -			A1 00779	
4 PLC ± -			C=480706	
ANGLES ± 0°30'			SCALE	
FINISH -			4:1	
MATERIAL NYLON, UL94V-2		CUSTOMER DRAWING		SHEET
				1 OF 2
				REV
				AL

LOC	DIST	REVISIONS				
CM	00	P	LTR	DESCRIPTION	DATE	APVD
		—	—	SEE SHEET 1	—	—

1. STAMP NUMBERS 3.18 [.125] HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE).
2. CHARACTERS TO BE POSITIONED ON HOUSING TO BE READ FROM WIRE END ONLY.
3. VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

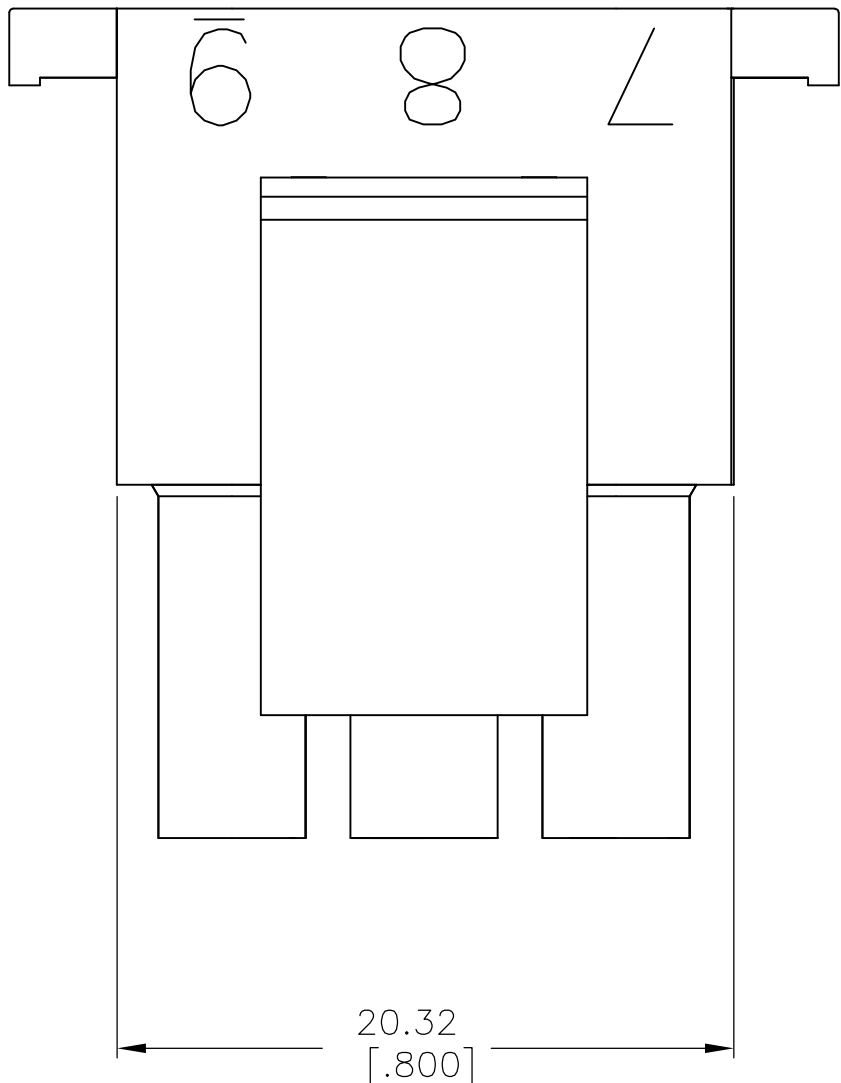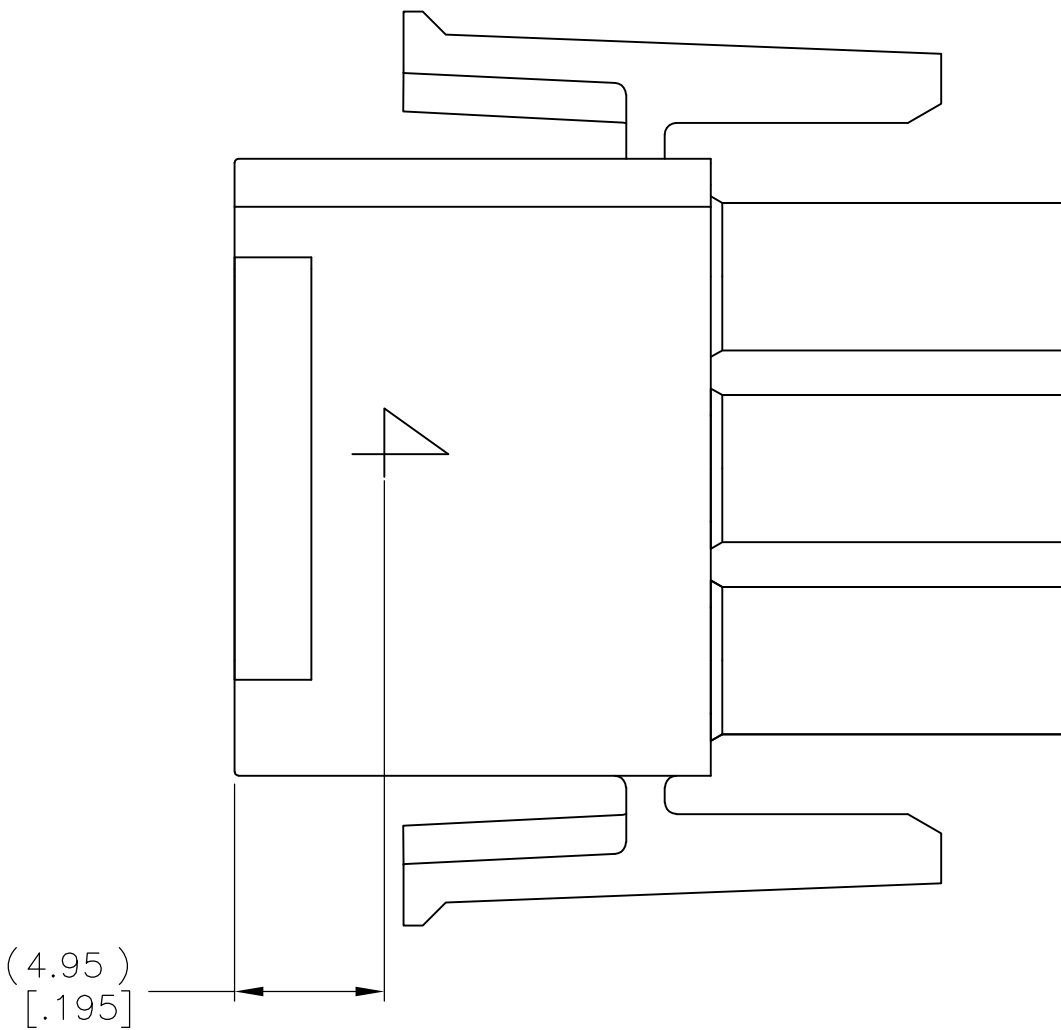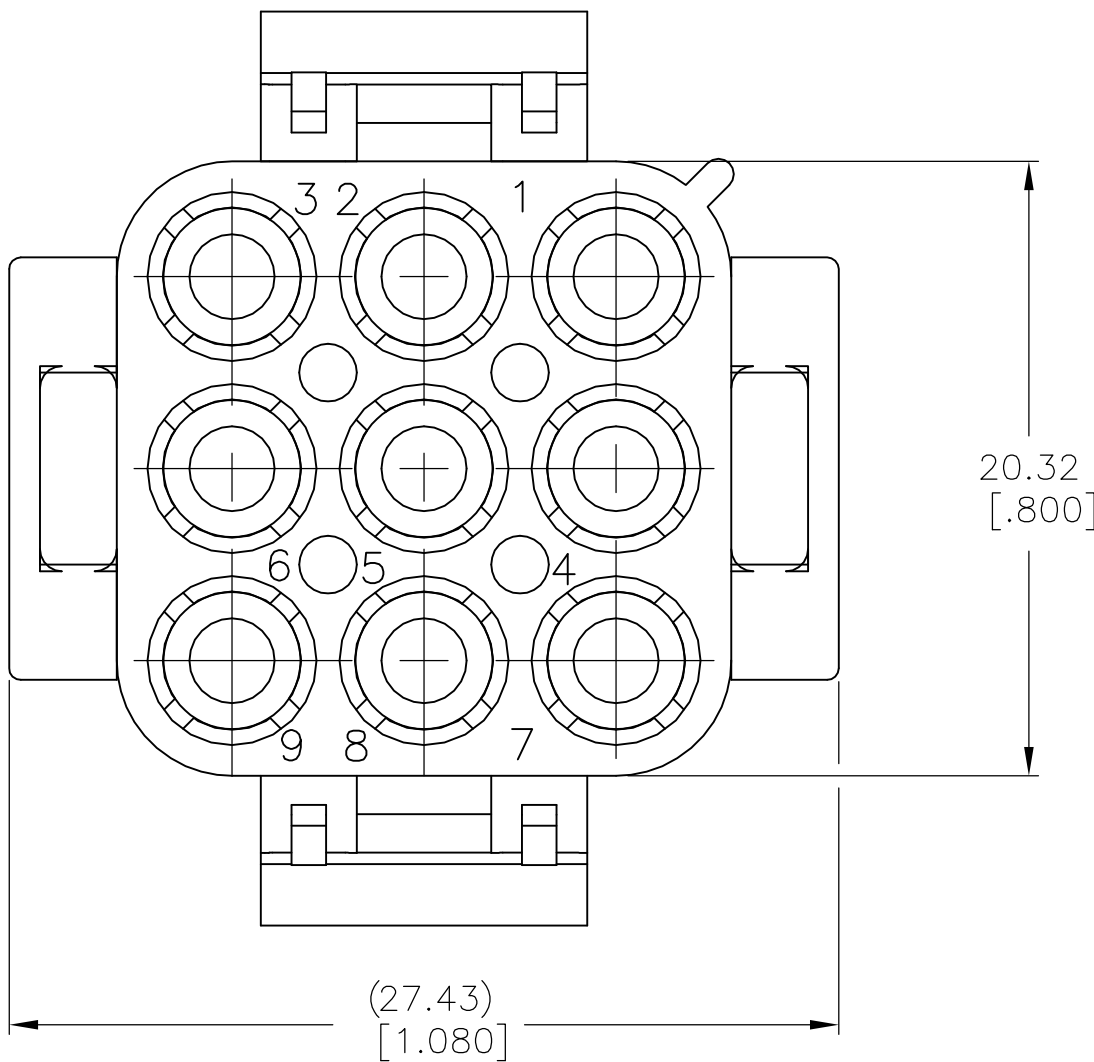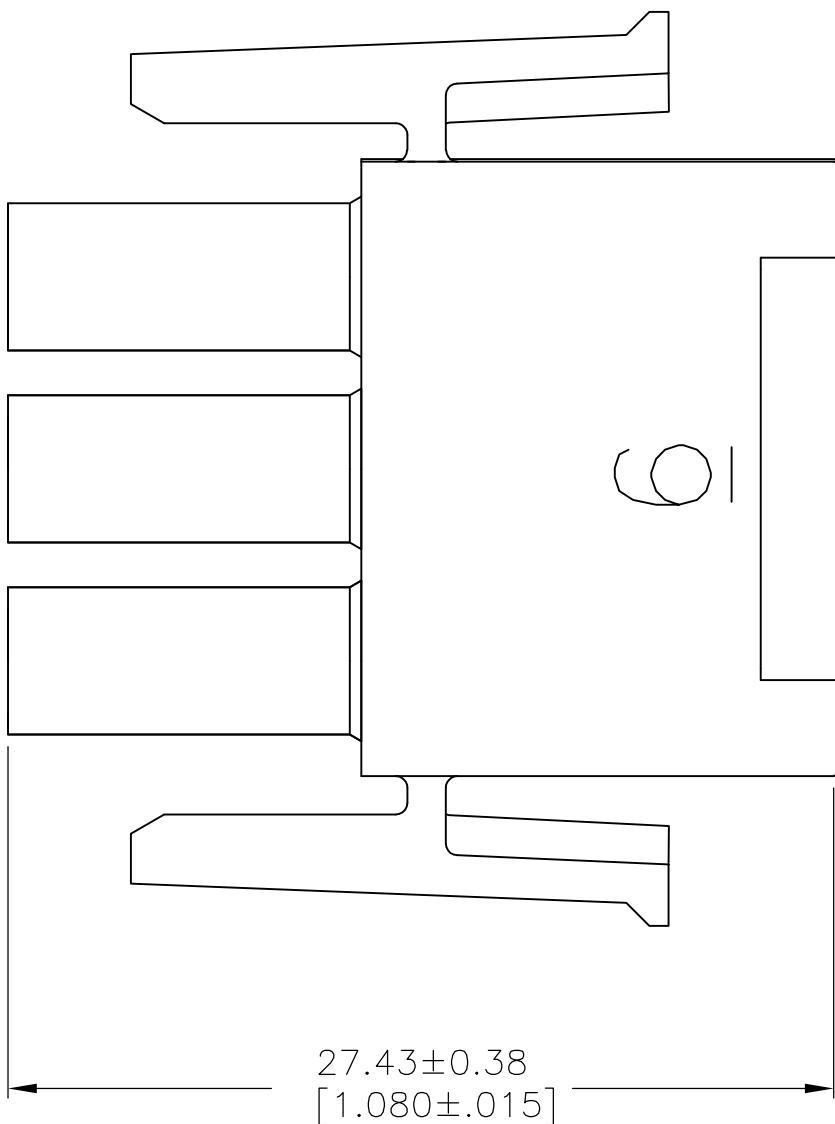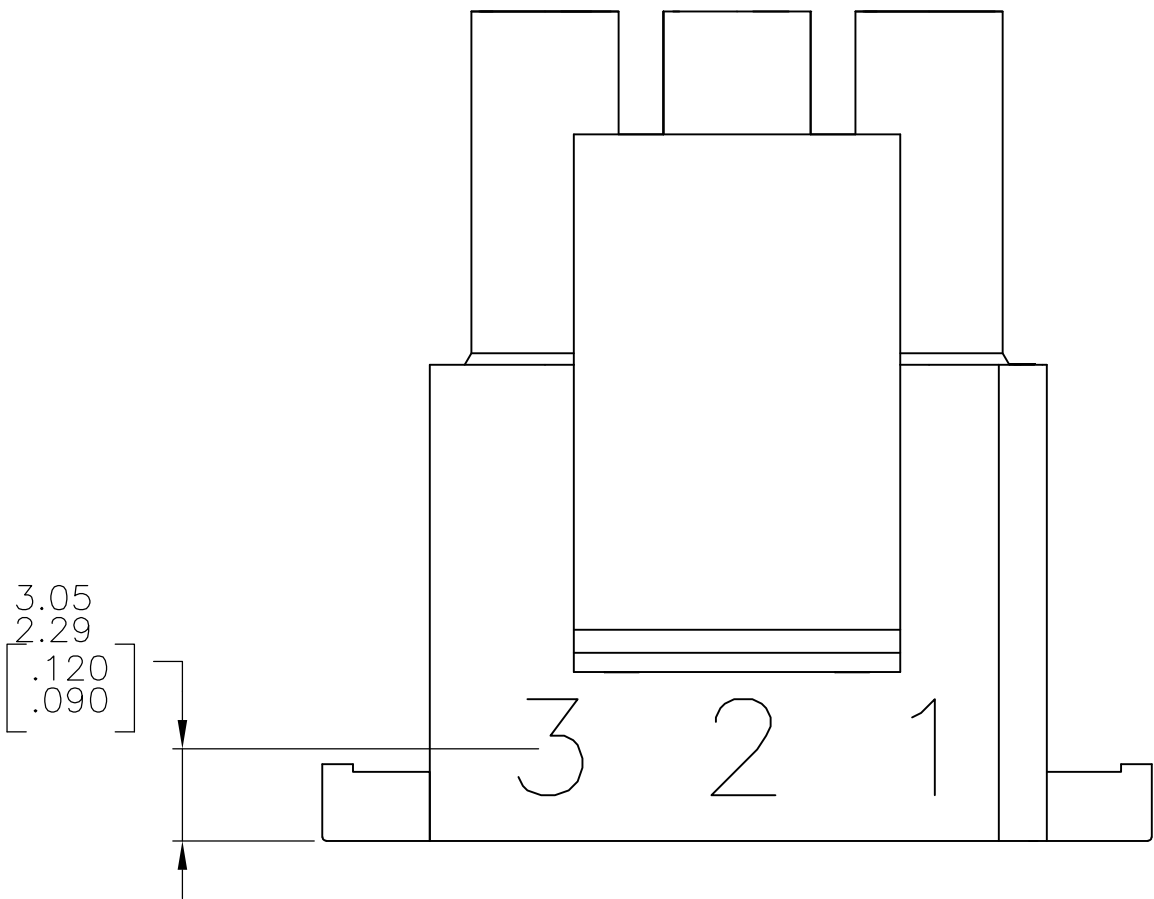

NATURAL	2-480706-0
COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 01SEP2004	TE Connectivity	
		CHK S. RIDGILL 01SEP2004		
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± 0.13 [.005] 3 PLC ± — 4 PLC ± — ANGLES ± 0°30'	APVD S. RIDGILL 01SEP2004	NAME PLUG, 9 CIRCUIT, UNIVERSAL MATE-N-LOK	
		PRODUCT SPEC		
		APPLICATION SPEC		
		WEIGHT		
MATERIAL	FINISH	—	A100779C=480706	
CUSTOMER DRAWING			SCALE 4:1	SHEET 2 OF 2 REV AL1