


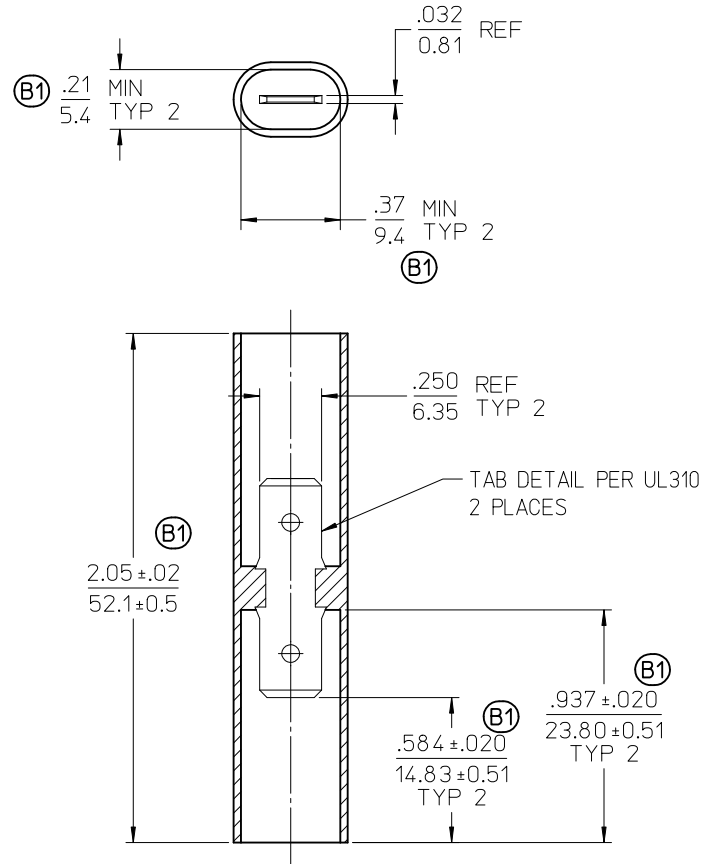

NOTES:

1. TERMINAL MATERIAL: BRASS
2. TERMINAL FINISH: TIN PLATED
3. INSULATOR MATERIAL: POLYPROPYLENE, FLAMMABILITY UL94 V-2, UL RTI 105 °C, COLOR TRANSLUCENT
4. ASSEMBLY IS ROHS COMPLIANT.

UPDATE TOLERANCES EC NO: WNA2011-0485 DRW: JTHRODAHL 2011/04/21 CHKD: JMACNEIL 2011/04/21 APPR: JMACNEIL 2011/04/21		DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION 	
B1	REV				mm	INCH	DRAWN BY	DATE	TITLE MALE, DOUBLE, QUICK DISCONNECT, INSULATED		
				4 PLACES	± ---	± ---	BRE	2001/06/06			
				3 PLACES	± ---	± .005	CHECKED BY	DATE	MOLEX INCORPORATED		
				2 PLACES	± 0.13	± .01	HEB	2001/06/06			
				1 PLACE	± 0.25	± ---	APPROVED BY	DATE			
ANGULAR ± ---°			RWD	2001/06/06	molex		MOLEX INCORPORATED				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. 191630178		DOCUMENT NO. SD-19163-007		SHEET NO. 1 OF 1				
			SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

19163-0178