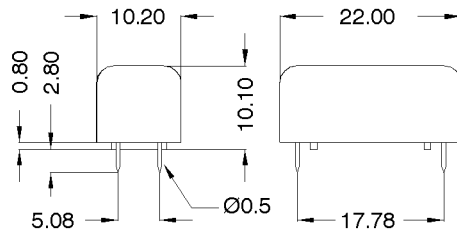



DIMENSIONS (mm)

 Tolerance ± 0.1 mm

 Pins: Ø0.5 mm
 L = 2.8 ± 0.3 mm
 Material: Cu-alloy tinned


LAYOUT(213)

pitch 2.54 mm/Top view



MARKING


 MEDER-Label
 Type
 Production code,
 EN60062/Factory code

Coil Data at 20 °C	Conditions	Min	Typ	Max	Unit
Coil resistance		4.500	5.000	5.500	Ohm
Coil voltage			24		VDC
Rated power			115		mW
Pull-In voltage				16,8	VDC
Drop-Out voltage		3,6			VDC

Contact data 66	Conditions	Min	Typ	Max	Unit
Contact-form			A		
Contact-material			Rhodium		
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
Switching voltage (<21 AT)	DC or Peak AC			180	V
Switching current	DC or Peak AC			0,5	A
Carry current	DC or Peak AC			1,2	A
Contact resistance static	Measured with 40% overdrive Start Value			150	mOhm
Insulation resistance	RH <45 %, 100 VDC test voltage	10			GOhm
Breakdown voltage (<21 AT)	according to IEC 255-5	200			VDC
Operate time incl. bounce	measured with 40% overdrive			0,5	ms
Release time	measured with no coil excitation			0,1	ms
Capacitance	@ 10 kHz across open switch		0,2		pF

Special Product Data	Conditions	Min	Typ	Max	Unit
Insulation resistance Coil/Contact	RH <45%, 200 VDC test voltage	10			GOhm
Insulation voltage Coil/Contact	according to IEC 255-5	2,12			kV DC
Housing material			Metal		
Sealing compound			Polyurethan		
Connection pins			Copper alloy tin plated		

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine wave duration 11ms			50	g
Vibration	from 10 - 2000 Hz			20	g
Ambient temperature		-20		70	°C
Storage temperature		-25		85	°C
Soldering temperature				260	°C
Cleaning			fully sealed		