




SAM7-P256 development board

Users Manual

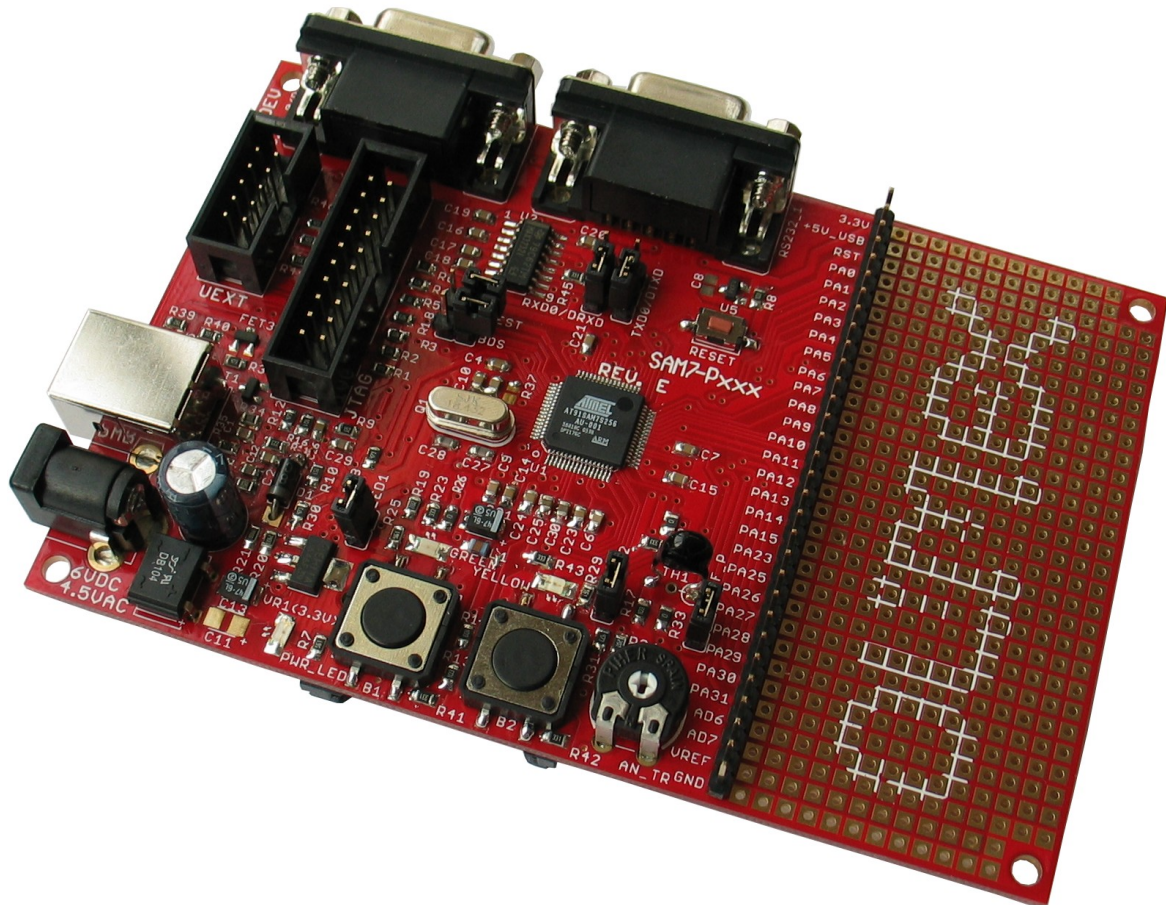

All boards produced by Olimex are ROHS compliant

Rev. F, August 2008

Copyright(c) 2010, OLIMEX Ltd, All rights reserved

INTRODUCTION:

Atmel's **AT91SAM7S256** is a member of a series of low pincount Flash microcontrollers based on the 32-bit ARM RISC processor. It features a 256 Kbyte high-speed Flash and a 64 Kbyte SRAM, a large set of peripherals, including a USB 2.0 device, and a complete set of system functions minimizing the number of external components. The device is an ideal migration path for 8-bit microcontroller users looking for additional performance and extended memory.

The embedded Flash memory can be programmed in-system via the JTAG-ICE interface or via a parallel interface on a production programmer prior to mounting. Built-in lock bits and a security bit protect the firmware from accidental overwrite and preserves its confidentiality.

The AT91SAM7S256 system controller includes a reset controller capable of managing the power-on sequence of the microcontroller and the complete system. Correct device operation can be monitored by a built-in brownout detector and a watchdog running off an integrated RC oscillator.

The AT91SAM7S256 is a general-purpose microcontroller. Its integrated USB Device port makes it an ideal device for peripheral applications requiring connectivity to a PC or cellular phone. Its aggressive price point and high level of integration pushes its scope of use far into the cost-sensitive, high-volume consumer market.

BOARD FEATURES:

- Microcontroller: **AT91SAM7S256** 16/32 bit ARM7TDMI™ with 256K Bytes Program Flash, 64K Bytes RAM, USB 2.0, RTT, 10 bit ADC 384 ksps, 2x UARTs, TWI (I2C), SPI, 3x 32bit TIMERS, 4x PWM, SSC, WDT, PDC (DMA) for all peripherals, up to 60MHz operation
- standard JTAG connector with ARM 2x10 pin layout for programming/debugging with ARM-JTAG
- USB connector
- Two channel RS232 interface and drivers
- SD/MMC card connector
- two buttons
- trimpot connected to ADC
- thermistor connected to ADC
- two status LEDs
- on board voltage regulator 3.3V with up to 800mA current
- single power supply: 6V AC or DC required
- power supply LED
- power supply filtering capacitor
- RESET circuit
- RESET button

- 18.432 Mhz crystal on socket
- extension headers for all microcontroller's ports
- PCB: FR-4, 1.5 mm (0,062"), soldermask, silkscreen component print
- Dimensions: 120 x 80 mm (4.7 x 3.15")

ELECTROSTATIC WARNING:

The **SAM7-P256** board is shipped in protective anti-static packaging. The board must not be subject to high electrostatic potentials. General practice for working with static sensitive devices should be applied when working with this board.

BOARD USE REQUIREMENTS:

Cables: The cable you will need depends on the programmer/debugger you use. If you use [ARM-JTAG-EW](#), you will need USB A-B cable.

Hardware: Programmer/Debugger [ARM-JTAG-EW](#) or other compatible programming/debugging tool if you work with EW-ARM.

You can use also [ARM-USB-OCD](#), [ARM-USB-TINY](#), [ARM-USB-TINY-H](#).

PROCESSOR FEATURES:

SAM7-P256 board use AT91 ARM Thumb-based microcontroller **AT91SAM7S256** from Atmel Corporation with these features:


- High-performance 32-bit RISC Architecture
- High-density 16-bit Instruction Set
- Leader in MIPS/Watt
- EmbeddedICE™ In-circuit Emulation, Debug Communication Channel Support
- Internal High-speed Flash
 - 256 Kbytes Organized in 1024 Pages of 256 Bytes (Single Plane)
 - Single Cycle Access at Up to 30 MHz in Worst Case Conditions
 - Prefetch Buffer Optimizing Thumb Instruction Execution at Maximum Speed
 - Page Programming Time: 6 ms, Including Page Auto-erase, Full Erase Time: 15 ms
 - 10,000 Write Cycles, 10-year Data Retention Capability, Sector Lock Capabilities, Flash Security Bit
 - Fast Flash Programming Interface for High Volume Production
- Internal High-speed SRAM, Single-cycle Access at Maximum Speed

- 64 Kbytes
- Memory Controller (MC)
 - Embedded Flash Controller, Abort Status and Misalignment Detection
- Reset Controller (RSTC)
 - Based on Power-on Reset and Low-power Factory-calibrated Brown-out Detector
 - Provides External Reset Signal Shaping and Reset Source Status
- Clock Generator (CKGR)
 - Low-power RC Oscillator, 3 to 20 MHz On-chip Oscillator and one PLL
- Power Management Controller (PMC)
 - Software Power Optimization Capabilities, Including Slow Clock Mode (Down to 500 Hz) and Idle Mode
 - Three Programmable External Clock Signals
- Advanced Interrupt Controller (AIC)
 - Individually Maskable, Eight-level Priority, Vectored Interrupt Sources
 - Two External Interrupt Source(s) and One Fast Interrupt Source, Spurious Interrupt Protected
- Debug Unit (DBGU)
 - 2-wire UART and Support for Debug Communication Channel interrupt, Programmable ICE Access Prevention
 - Mode for General Purpose 2-wire UART Serial Communication
- Periodic Interval Timer (PIT)
 - 20-bit Programmable Counter plus 12-bit Interval Counter
- Windowed Watchdog (WDT)
 - 12-bit key-protected Programmable Counter
 - Provides Reset or Interrupt Signals to the System
 - Counter May Be Stopped While the Processor is in Debug State or in Idle Mode
- Real-time Timer (RTT)
 - 32-bit Free-running Counter with Alarm
 - Runs Off the Internal RC Oscillator
- One Parallel Input/Output Controller (PIOA)
 - Thirty-two Programmable I/O Lines Multiplexed with up to Two Peripheral I/Os
 - Input Change Interrupt Capability on Each I/O Line
 - Individually Programmable Open-drain, Pull-up resistor and Synchronous Output


- Eleven Peripheral DMA Controller (PDC) Channels
- One USB 2.0 Full Speed (12 Mbits per Second) Device Port
 - On-chip Transceiver, 328-byte Configurable Integrated FIFOs
- One Synchronous Serial Controller (SSC)
 - Independent Clock and Frame Sync Signals for Each Receiver and Transmitter
 - I²S Analog Interface Support, Time Division Multiplex Support
 - High-speed Continuous Data Stream Capabilities with 32-bit Data Transfer
- Two Universal Synchronous/ Asynchronous Receiver Transmitters (USART)
 - Individual Baud Rate Generator, IrDA® Infrared Modulation/Demodulation
 - Support for ISO7816 T0/T1 Smart Card, Hardware Handshaking, RS485 Support
 - Full Modem Line Support on USART1
- One Master/Slave Serial Peripheral Interface (SPI)
 - 8- to 16-bit Programmable Data Length, Four External Peripheral Chip Selects
- One Three-channel 16-bit Timer/Counter (TC)
 - Three External Clock Input and Two Multi-purpose I/O Pins per Channel
 - Double PWM Generation, Capture/Waveform Mode, Up/Down Capability
- One Four-channel 16-bit PWM Controller (PWMC)
- One Two-wire Interface (TWI)
 - Master Mode Support Only, All Two-wire Atmel EEPROMs and I²C Compatible Devices Supported
- One 8-channel 10-bit Analog-to-Digital Converter, Four Channels Multiplexed with Digital I/Os
- SAM-BA™ Boot Assistant
 - Default Boot program
 - Interface with SAM-BA Graphic User Interface
- IEEE® 1149.1 JTAG Boundary Scan on All Digital Pins
- 5V-tolerant I/Os, including Four High-current Drive I/O lines, Up to 16 mA Each
- Power Supplies
 - Embedded 1.8V Regulator, Drawing up to 100 mA for the Core and External Components
 - 3.3V or 1.8V VDDIO I/O Lines Power Supply, Independent 3.3V VDDFLASH Flash Power Supply

- 1.8V VDDCORE Core Power Supply with Brown-out Detector
- Fully Static Operation: Up to 55 MHz at 1.65V and 85-C Worst Case Condition


BLOCK DIAGRAM:

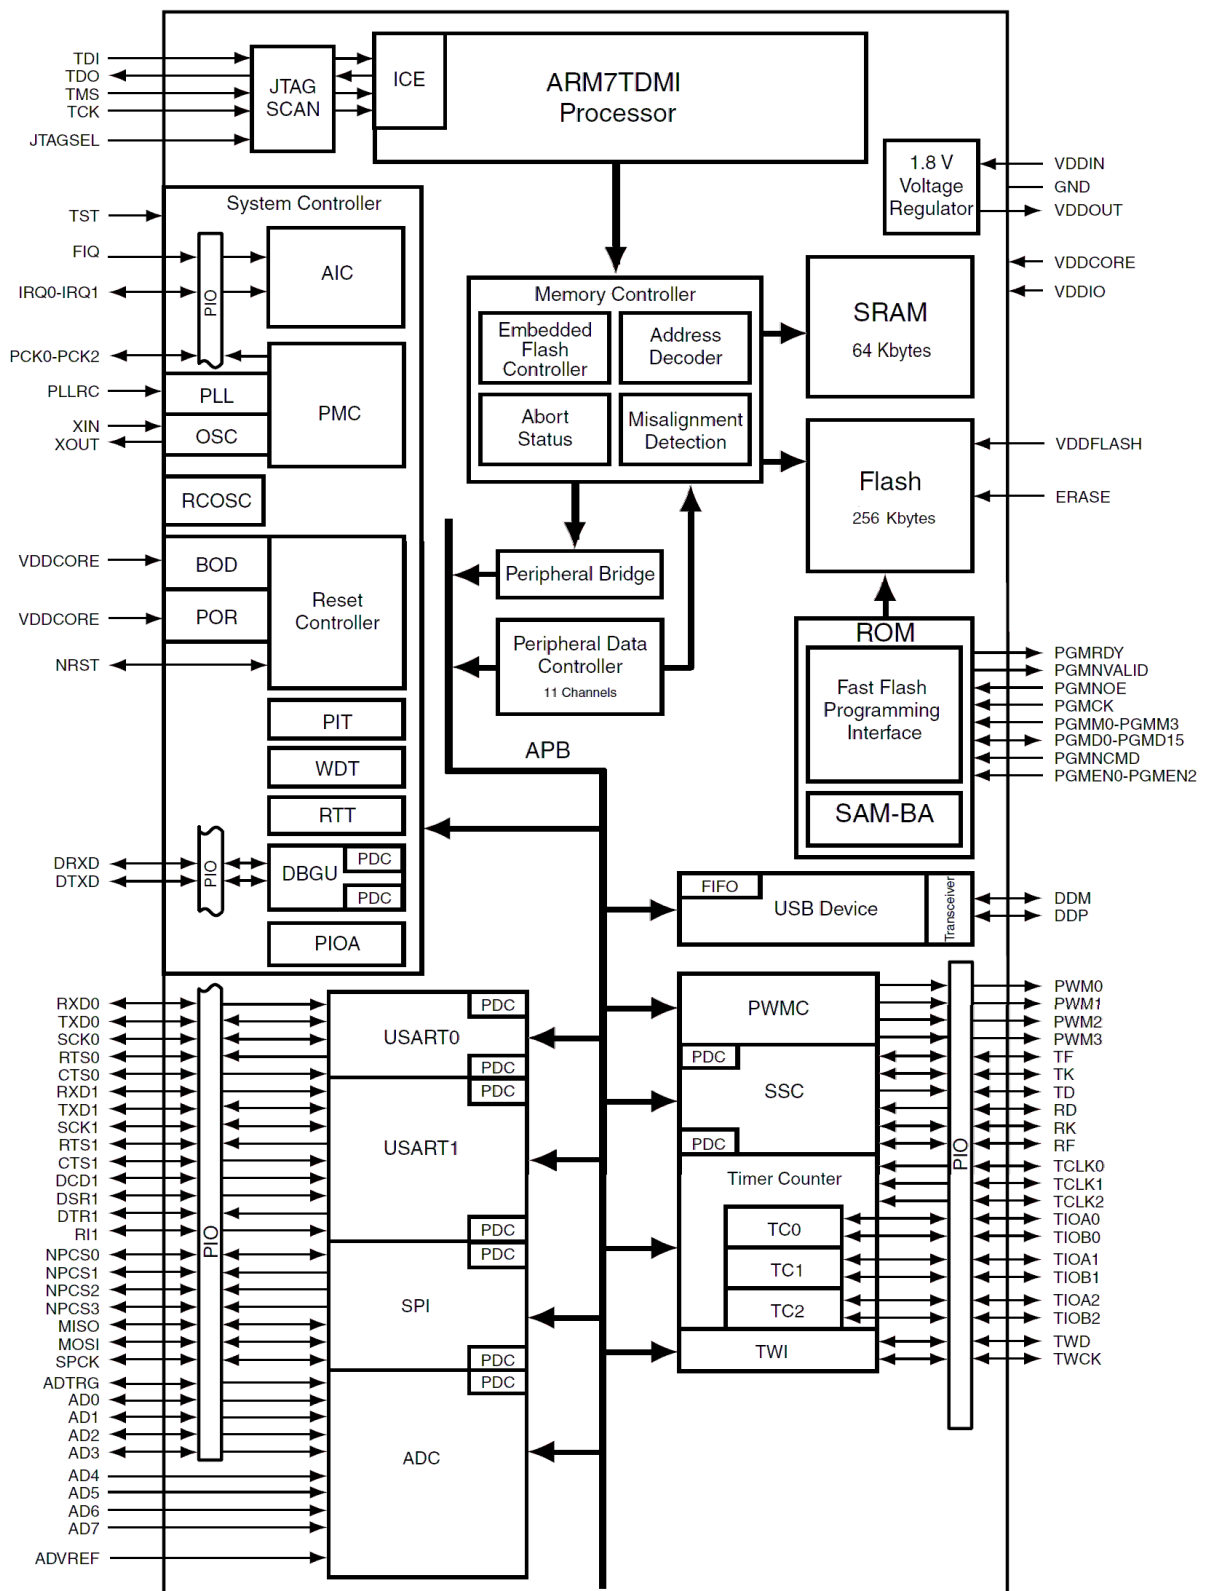

MEMORY MAP:

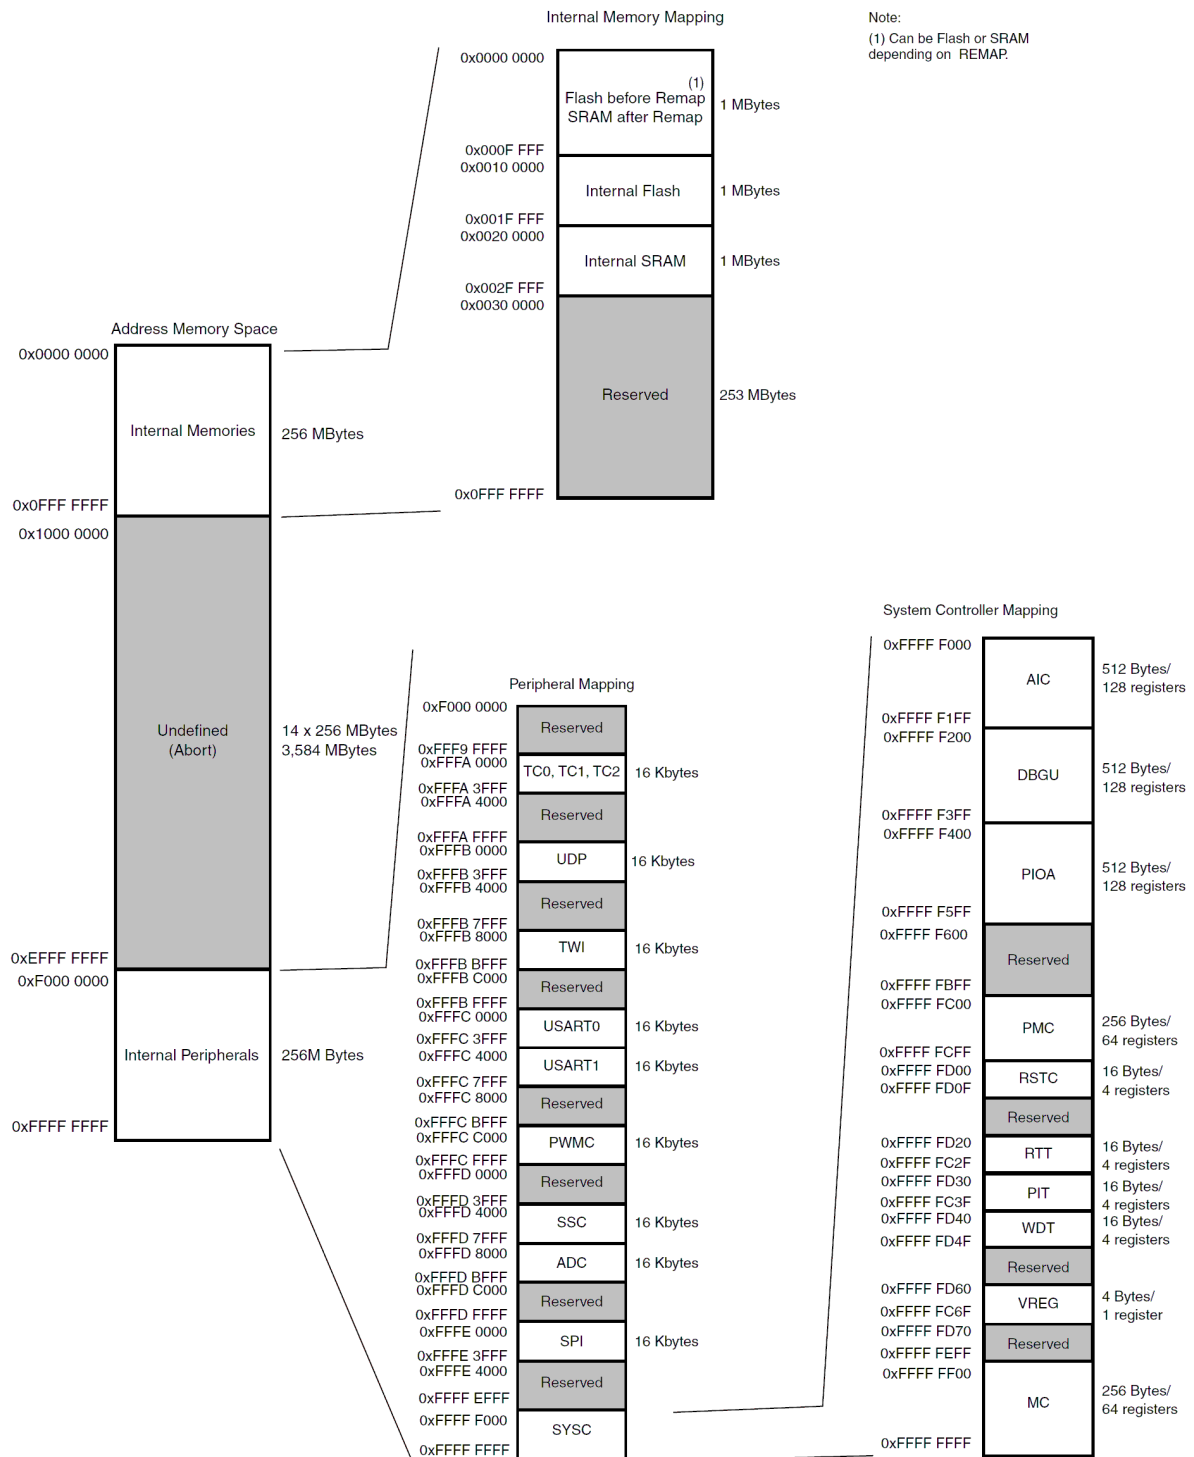

SCHEMATIC:

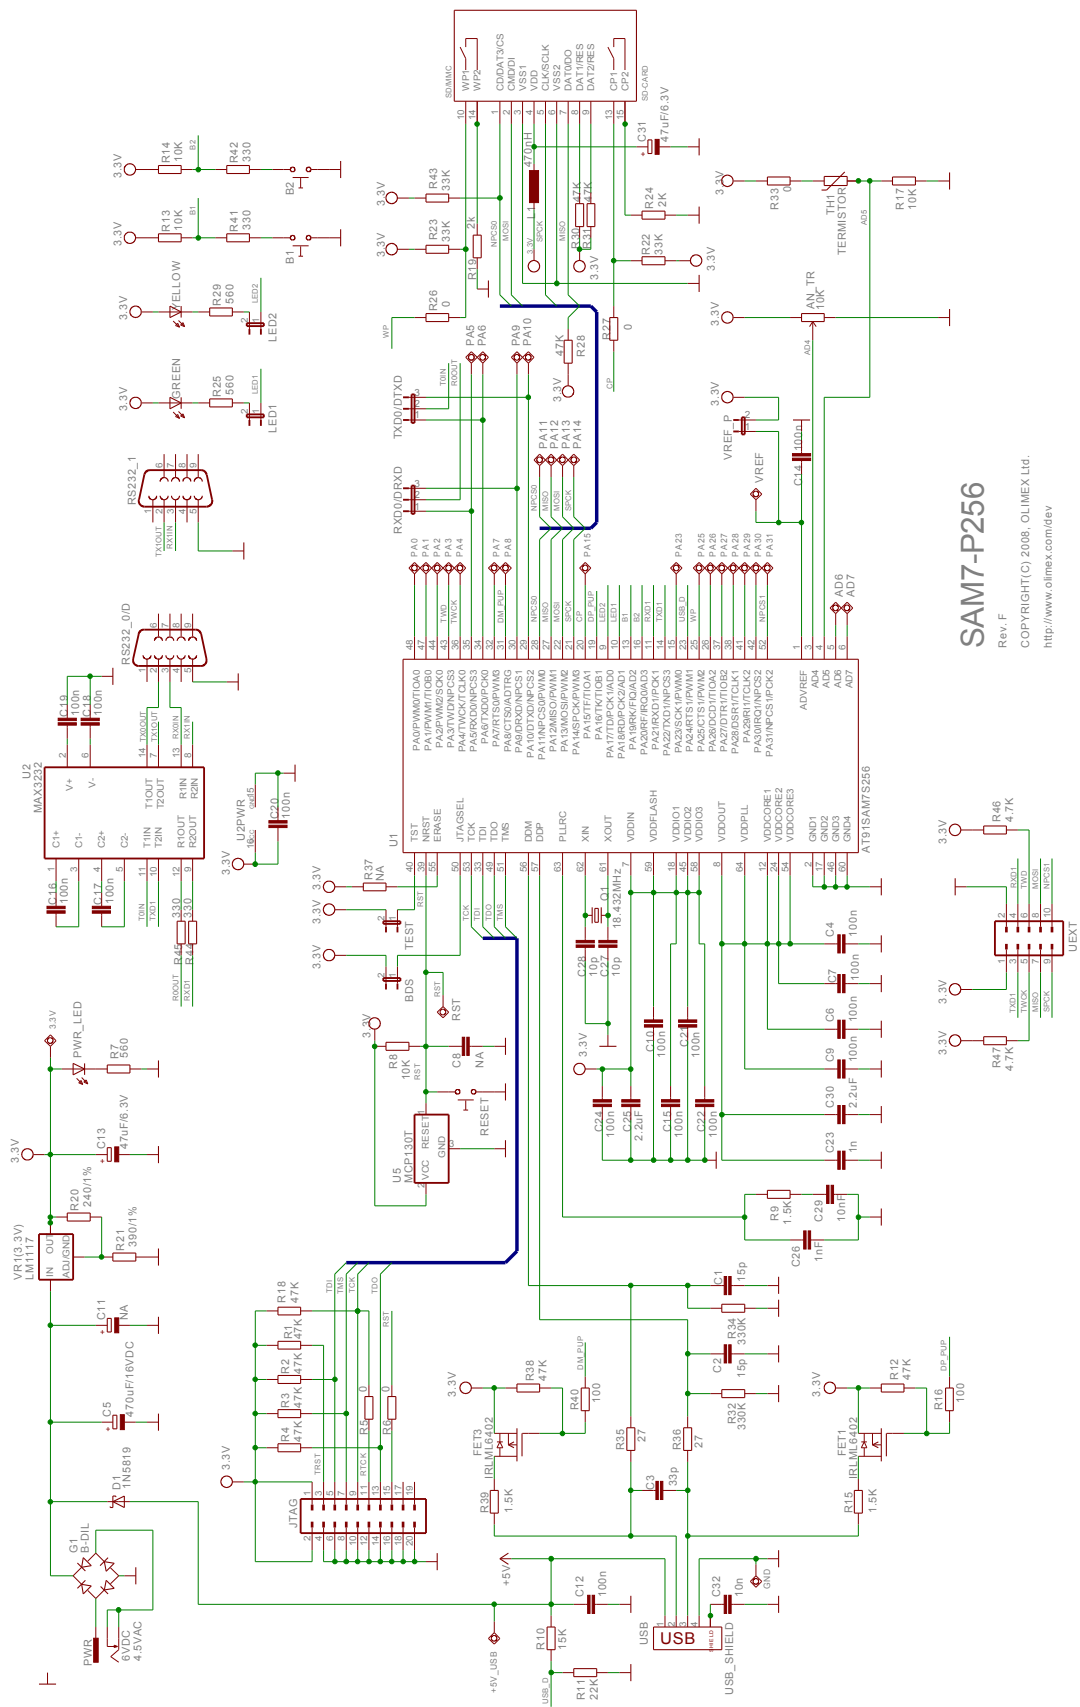



SAM7-P256

Rev. F

COPYRIGHT(C) 2008. OLIMEX LTD.

<http://www.olimex.com/dev>

BOARD LAYOUT:

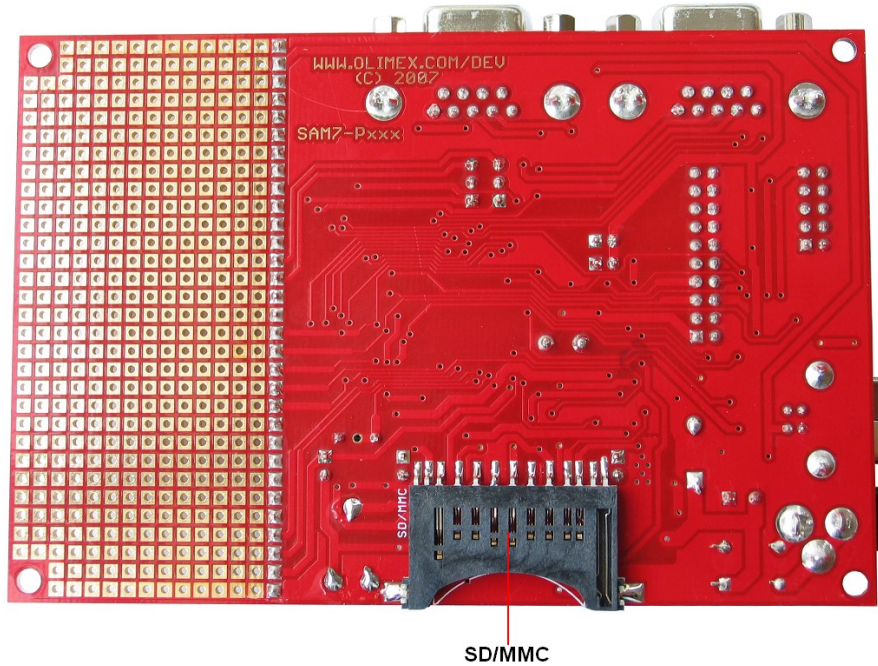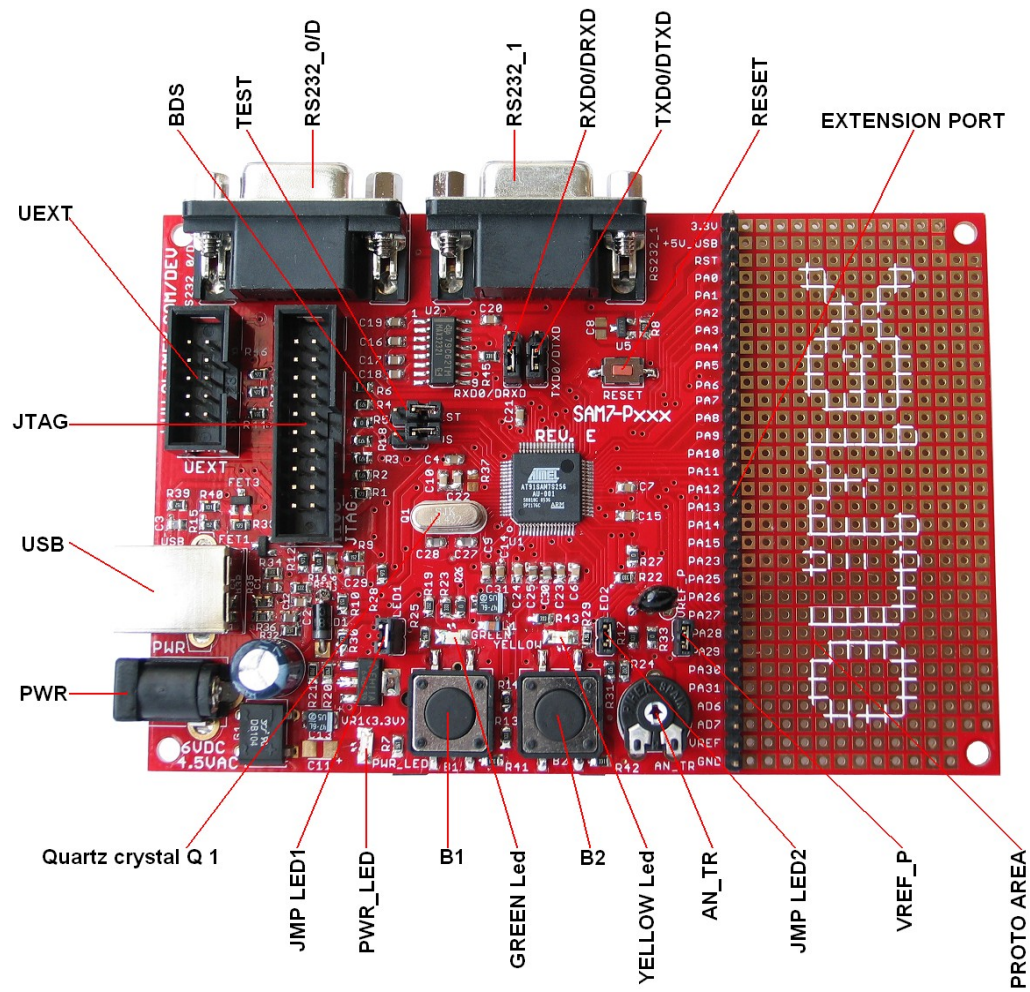

POWER SUPPLY CIRCUIT:

SAM7-P256 is typically power supplied with 6 VDC.

The programmed board power consumption is about 30 mA.

RESET CIRCUIT:

SAM7-P256 reset circuit includes U5 (MCP130T), R8 (10k), pin 15 of JTAG connector, pin 39 (NRST) of AT91SAM7S256 and RESET button.

CLOCK CIRCUIT:

Quartz crystal **Q1** 18.432 MHz is connected to AT91SAM7S256 pin 61 (XOUT) and pin 62 (XIN).

JUMPER DESCRIPTION:

Jumpers	Position	Description
Jumper BDS		Enable normal mode.
		The pin JTAGSEL is used to select the JTAG boundary scan.
Jumper TST		Enable normal mode.
		The pin TST is used for manufacturing test or fast programming mode.
Jumper RXD0/DRXD Jumper TXD0/DTXD		RS232_0 is not connected
		
		RS232_0 is connected to RXD0 and TXD0 (USART0)
		
Jumper LED_J		RS232_0 is connected to DRXD and DTXD which is used in programming mode - via COM Port.
		
Jumper LED 1		Green led is not connected.
		Green led connected to PA17 / TD / PCK1 / AD0 (PIN 9)
Jumper LED 1		Yellow led is not connected
		Yellow led connected to PA18 RD PCK2 AD1 (PIN 10)
Jumper VREF_P		ADVREF pin (PIN 1) is connected to VREF pin.
		ADVREF pin (PIN 1) is connected to 3.3V.

Description for programming via RS232 0/D COM port, when is SAM-BA software

The AT91SAM7S256 can be programmed via COM port using the SAM-BA™ software. Before being able to use SAM-BA, a recovery procedure, which consists of copying the SAM-BA Boot Assistant into Flash must be performed as follows:

1. Power down the AT91SAM7S256
2. Close jumper TST
3. Power up the AT91SAM7S256
4. Wait 10 sec
5. Power down the AT91SAM7S256
6. Remove jumper TST
7. Power up the AT91SAM7S256

Note: For programming via COM port, you must set jumpers RXD0/DRXD and TXD0/DTXD, according to jumpers description above.

INPUT/OUTPUT:

Status Led (green) with name **GREEN** connected via jumper **LED1** to **AT91SAM7S256** pin 10 (PA18/RD/PCK2/AD1).

Status Led (yellow) with name **YELLOW** connected via jumper **LED2** to **AT91SAM7S256** pin 9 (PPA17/TD/PCK1/AD0).

Power-on LED (red) with name **PWR_LED** – this LED shows that +3.3V is applied to the board.

User button with name **B1** connected to **AT91SAM7S256** pin 13 (PA19/RK/FIQ/AD2).

User button with name **B2** connected to **AT91SAM7S256** pin 16 (PA20/RF/IRQ0/AD3).

User button with name **RESET** connected to **AT91SAM7S256** pin 39 (NRST).


Trimpot with name **AN_TR** connected to **AT91SAM7S256** pin 3 (AD4).

Thermistor with name **TH1** connected to **AT91SAM7S256** pin 4 (AD5).

EXTERNAL CONNECTORS DESCRIPTION:


RS232 0/D:

Pin #	Signal Name
1	NC
2	TX0OUT
3	RX0IN
4	NC
5	GND
6	NC
7	NC
8	NC
9	NC

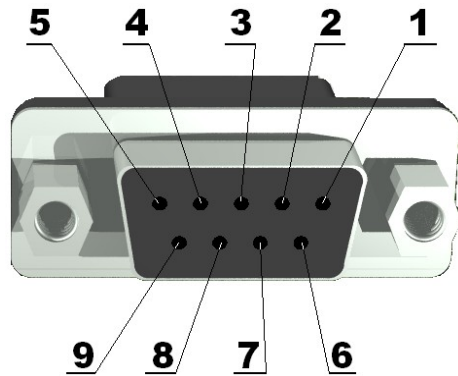


RS232 1:

Pin #	Signal Name
1	NC
2	TX1OUT
3	RX1IN
4	NC
5	GND
6	NC
7	NC
8	NC
9	NC

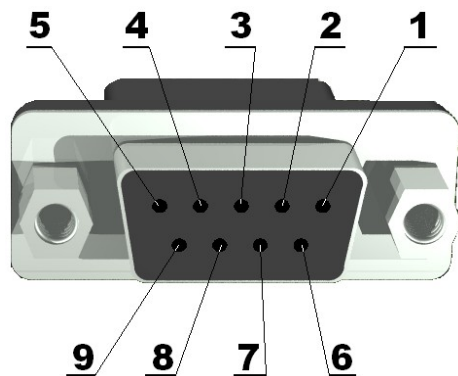


PWR JACK:

Pin #	Signal Name
1	Power Input
2	GND



UEXT:


Pin #	Signal Name
1	3.3V
2	GND
3	TXD1
4	RXD1
5	TWCK
6	TWD
7	MISO
8	MOSI
9	SPCK
10	NPCS1

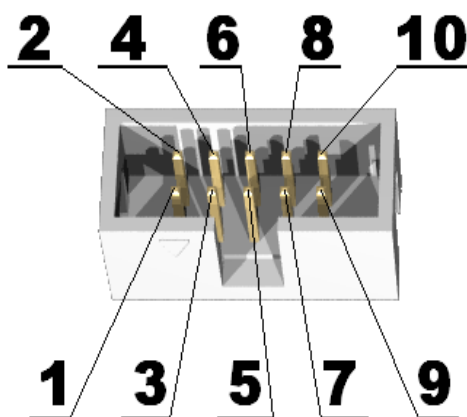

JTAG:

The JTAG connector allows the software debugger to talk via a JTAG (Joint Test Action Group) port directly to the core. Instructions may be inserted and executed by the core thus allowing AT91SAM7S256 memory to be programmed with code and executed step by step by the host software.


For more details refer to IEEE Standard 1149.1 - 1990 Standard Test Access Port and Boundary Scan Architecture and AT91SAM7S256 datasheets and users manual.

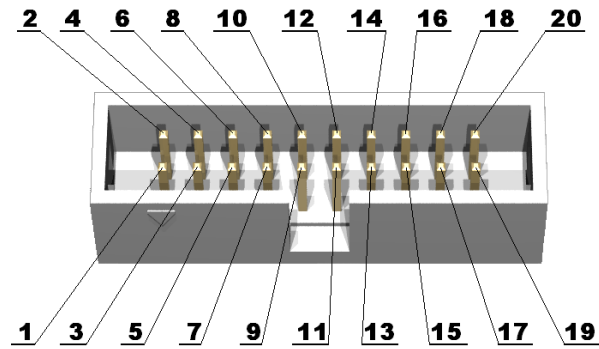


Pin #	Signal Name	Pin #	Signal Name
1	3.3V	2	3.3V
3	TRST	4	GND
5	TDI	6	GND
7	TMS	8	GND
9	TCK	10	GND
11	RTCK	12	GND
13	TDO	14	GND
15	RST	16	GND
17	NC	18	GND
19	NC	20	GND

USB

Pin #	Signal Name
1	+5V_USB
2	DDM
3	DDP
4	GND

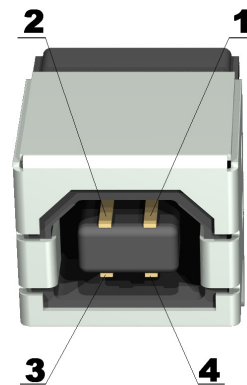

SD/MMC




Pin #	Signal Name	Pin #	Signal Name
1	NPCS0	2	MOSI
3	GND (VSS1)	4	VDD
5	SPCK	6	GND (VSS2)
7	MISO	8	Via R30 (47k) to 3.3V
9	Via R31 (47k) to 3.3V	10	WP
11	Via R19 (2k) to GND	12	Via R24 (2k) to GND
13	CP	14	Via R19 (2k) to GND
15	Via R24 (2k) to GND		

EXTENSION PORT

3.3V	
+5V_USB	
RST	
PA0	
PA1	
PA2	
PA3	
PA4	
PA5	
PA6	
PA7	
PA8	
PA9	
PA10	
PA11	
PA12	
PA13	
PA14	
PA15	
PA23	
PA25	
PA26	
PA27	
PA28	
PA29	
PA30	
PA31	
AD6	
AD7	
VREF	
GND	

MECHANICAL DIMENSIONS:

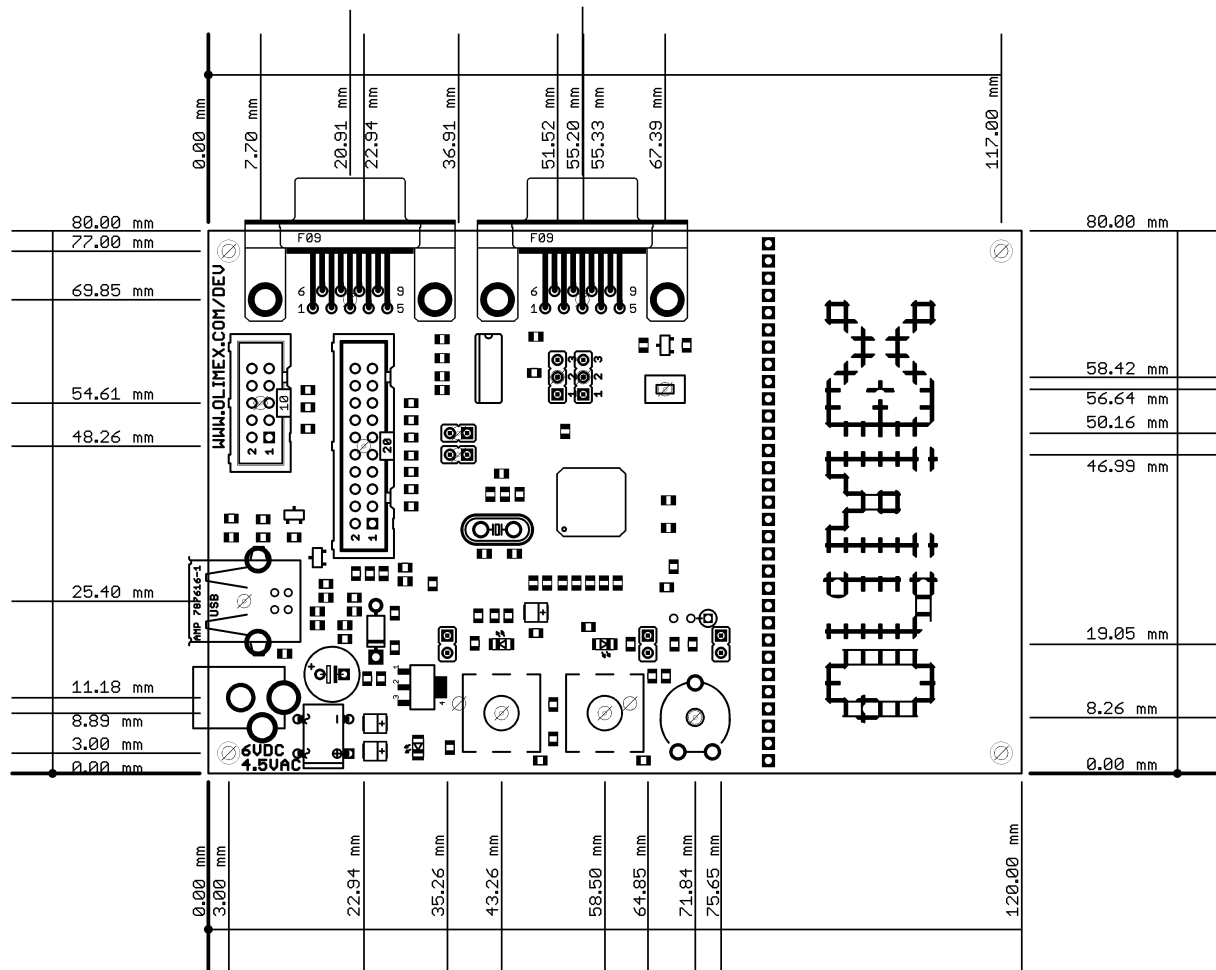

AVAILABLE DEMO SOFTWARE:

- SAM7-P256 blinking LED project and binary code for SAM-BA load
- SAM7-P256 sample mouse driver project
- UART routines project
- SD/MMC read/write routines project
- button read, temperature measurement project
- MOD-SMB380 read demo code for EW-ARM 4.11 with SAM7-P64/256 board
- USB virtual COM port for GCC+OpenOCD+Eclipse
- OpenOCD + Eclipse set of projects 1.00 include flash write make file for SAM7-P256

ORDER CODE:

SAM7-P256 - assembled and tested board

How to order?

You can order to us directly or by any of our distributors.
Check our web www.olimex.com/dev for more info.

Revision history:

Revision F, August 2008

Disclaimer:

© 2010 Olimex Ltd. All rights reserved. Olimex®, logo and combinations thereof, are registered trademarks of Olimex Ltd. Other terms and product names may be trademarks of others.

The information in this document is provided in connection with Olimex products. No license, express or implied or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Olimex products.

Neither the whole nor any part of the information contained in or the product described in this document may be adapted or reproduced in any material form except with the prior written permission of the copyright holder.

The product described in this document is subject to continuous development and improvements. All particulars of the product and its use contained in this document are given by OLIMEX in good faith. However all warranties implied or expressed including but not limited to implied warranties of merchantability or fitness for purpose are excluded.

This document is intended only to assist the reader in the use of the product. OLIMEX Ltd. shall not be liable for any loss or damage arising from the use of any information in this document or any error or omission in such information or any incorrect use of the product.