

LOW PROFILE PANEL LENSES FOR PCB MOUNTED LEDs


SPECIFICATIONS

MATERIAL	Lens - Polycarbonate Retaining Ring - Polypropylene (U.L. Listed Materials)
DESIGN	Low profile lenses CMC 313 plain diffused, CMC 321, CML 325 & SMC 170 with fresnel rings. CMC 323 & CML 327 plain end lens.
MOUNTING	Mounts through front of panel, Retaining ring secures the lens in place. 5mm CMC & CML series mount in a .281" (7.2mm) hole on 3/8" centers, Panel thickness 1/32" to 1/4". 3mm (SMC 170) mounts in a .171" (4.4mm) hole on 1/4" centers. Panel thickness 1/32" to 3/32". For added security use RNG 132 (3mm) or RNG 268 (5mm).




U.S. & Foreign Patents Issued and Pending

PANEL MOUNTED LENS WITH PCB MOUNTED LED

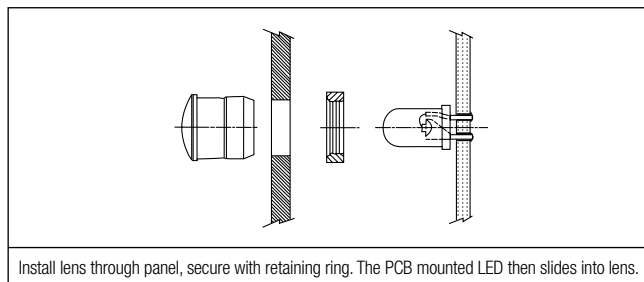

Install lens through panel, secure with retaining ring. The PCB mounted LED then slides into lens.


PANEL MOUNTED LENS WITH CONXRITE CONNECTOR

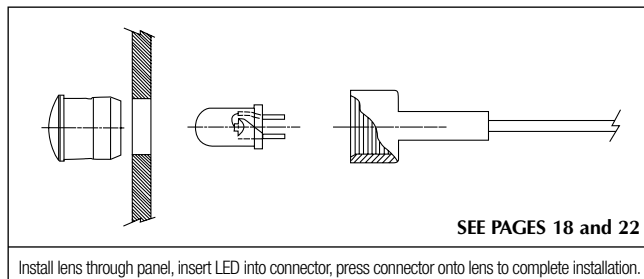

SEE PAGES 18 and 22

Install lens through panel, insert LED into connector, press connector onto lens to complete installation.

RECOMMENDED LEDs

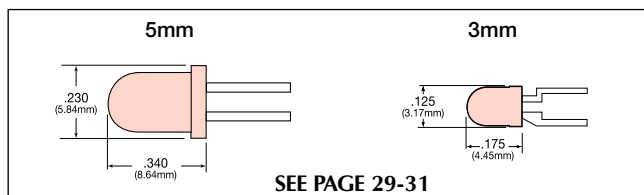

SEE PAGE 29-31

VERSATILITY

CLIPLITE® lenses, installed in a display panel, are used with PCB mounted LEDS. Lenses remain attached to the display or panel door while the LEDs are fixed to the PCB. The lenses are ideal when used together with the CONXRITE® connector assembly.

BRIGHTNESS

CLIPLITE® lenses utilize fresnel rings to increase apparent brightness and viewing angle up to 180 degrees with either diffused or nondiffused LEDS.

PROTECTION

CLIPLITE® lenses help prevent IC failures caused by electrostatic discharge (ESD). Introduction of ESD through an exposed panel mounted LED is capable of damaging or destroying a semiconductor. A CLIPLITE® mounted LED helps guard components from ESD up to 16KV while affording the LED physical protection.

INSTALLATION

CLIPLITE® is inserted through panel opening, retaining ring pressed into place. PCB mounted LEDs slide into lenses when the panel cover is closed or the PCB card is inserted into the case.

ORDERING CODES

CMC 321 RTP

MODEL

SMC 170 (3mm) Fresnel Low Profile Lens

CMC 313 (5mm) Plain Diffused Lens

CMC 321 (5mm) Fresnel Low Profile Lens

* CMC 323 (5mm) Plain End Lens

* CML 325 (5mm) Fresnel Low Profile Lens

* CML 327 (5mm) Plain End Lens

RNG 132 (3mm) Retaining Ring

RNG 268 (5mm) Retaining Ring

* Denotes Clear only

COLOR

RTP Red Transparent

ATP Amber Transparent


GTP Green Transparent

YTP Yellow Transparent

BTP Blue Transparent

CTP Clear Transparent

LENS STYLES

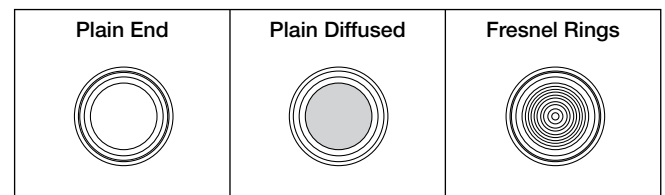

OUTLINE DRAWING

