


GSD

UG-88C/U

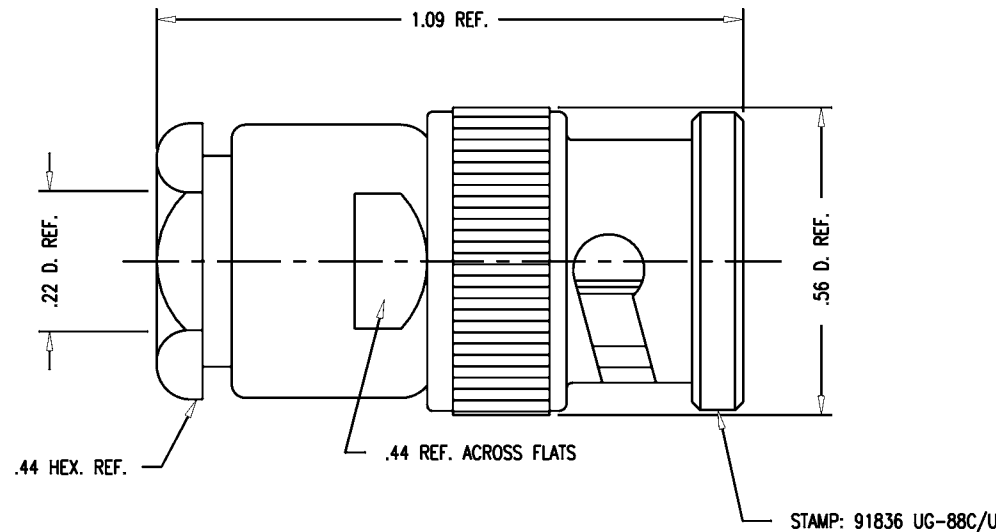

NOTES:

1. FOR USE WITH RG-55, 58 & 223/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-1004.
3. INTERFACE PER MIL-STD-348, FIG. 301-1.
4. MATERIALS:
INSULATOR: TEFLON, ASTM-D-1457
GASKETS: SILICONE RUBBER, ZZ-R-765
SPRING WASHER: BER. COPPER, ASTM-B-196
ALL OTHER METAL PARTS: BRASS, ASTM-B16
5. FINISHES:
ALL METAL PARTS: SILVER PLATE, PER QQ-S-365
6. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 500 VRMS
FREQUENCY RANGE: DC TO 4 GHz

REVISIONS

ISSUE	CHANGES
8	CN 34089 D REDRAWN JCA 09/21/92
9	CN 34233 C KH 11/02/92

JCA3161

SCALE 4:1

APPROX SURFACE AREA

KC-53-01

USED ON

REF: SC-D-72235 MS-35168

PLUG, BNC

DRAWN JCA	DATE 09/21/92
DESIGN MJB	DATE 09/22/92
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

UG-88C/U

GSD