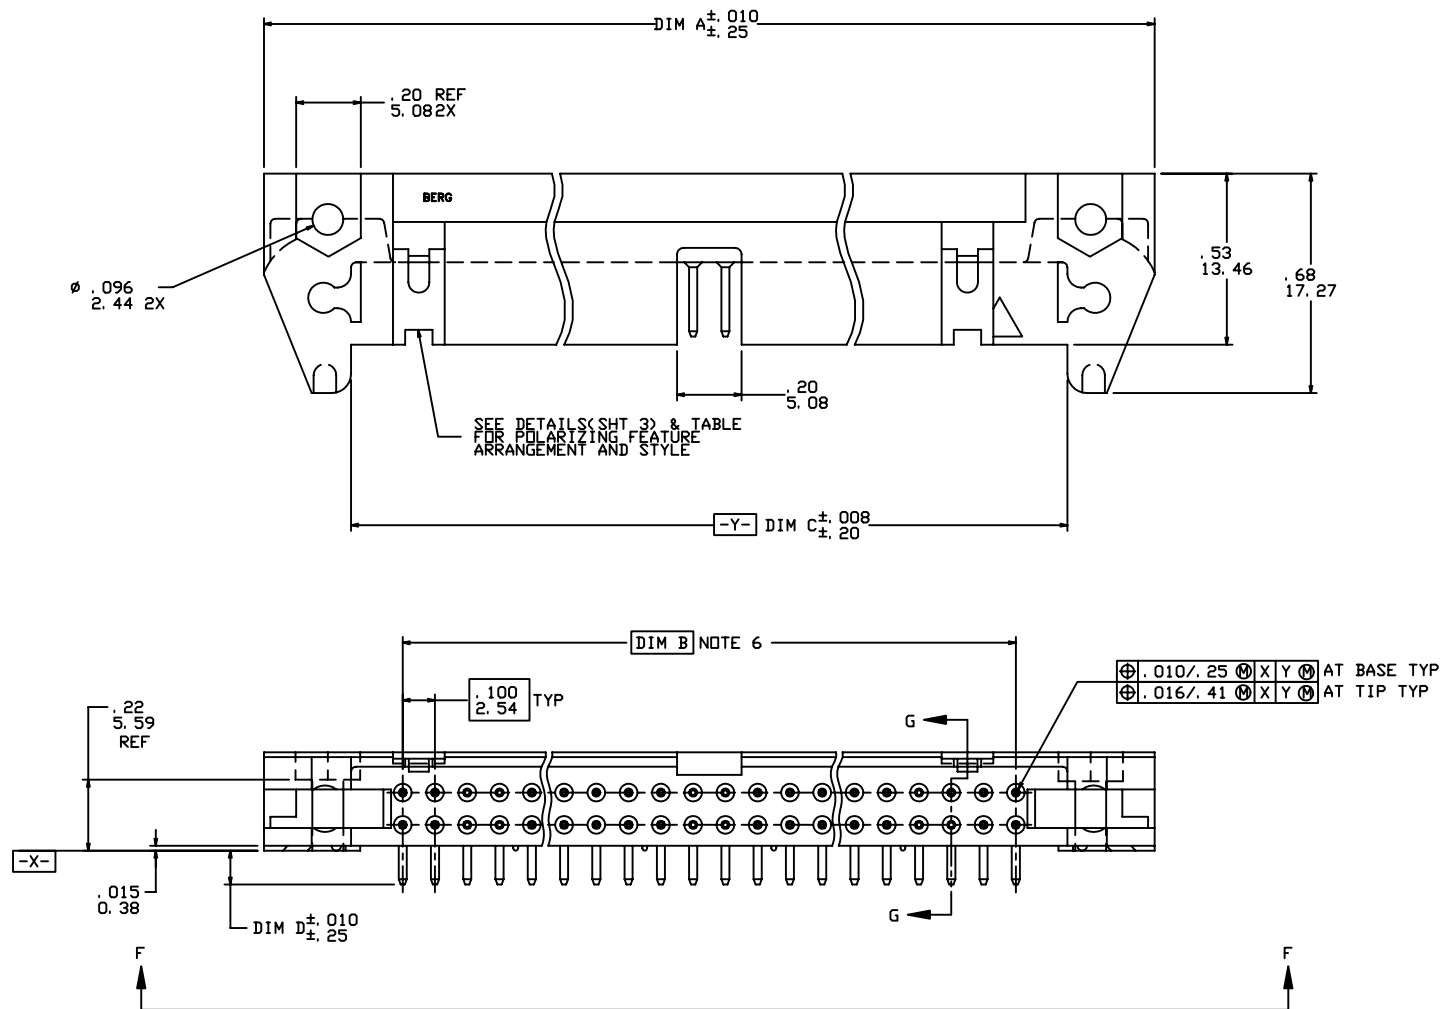


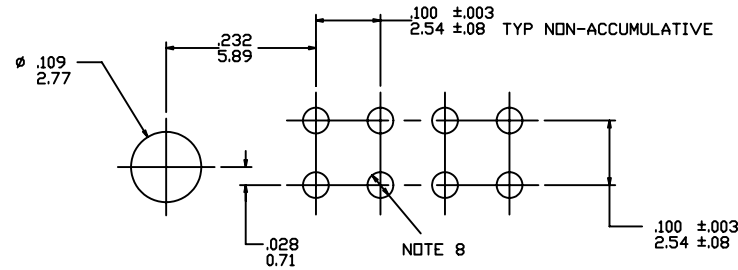
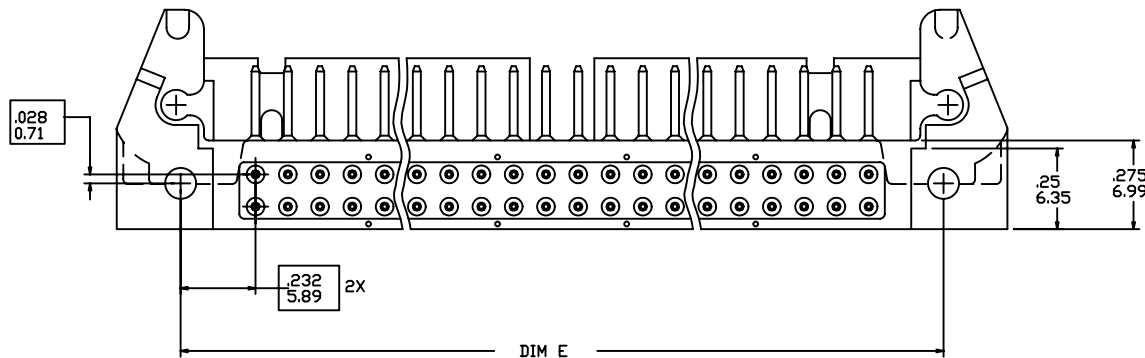




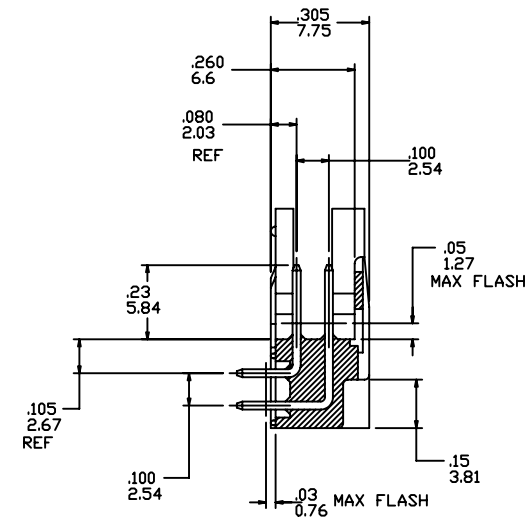
mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY			 www.fciconnect.com																
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3				projection			title															
AC	I40002	LSS	07/22/94		.XXX±.005/.XX±.13							HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE															
AD	N05-0129	ZC	5/20/05		.XXX±.0020/.XXX±.051																						
AE	N05-0151	WG	7/31/07	angles	0°±2°							product family QUICKIE size dwg no															
AF	N08-0175	R.B	2008/08/22	dr	J. SHREINER	1/16/90																					
				engr	M. SMYK	1/16/90		scale			A 65823																
				chr	M. SMYK	1/16/90																					
				appd	M. SMYK	1/16/90		5:1			sheet 1 of 21																
AE	sheet	revision	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF
21	index	sheet	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20					




RECOMMENDED HOLE PATTERN
SCALE 10:1






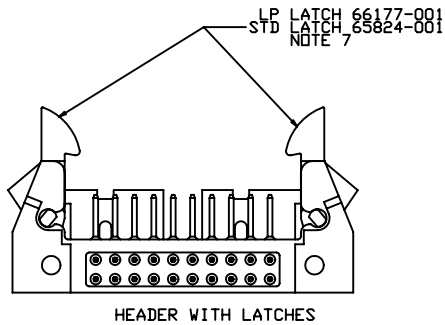


VIEW F-F



SECTION G-G
ROTATED 90°CW

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com		
ltr	ecn no	dr	date	linear	angles				
AF				.XX±.01/.X±.3		projection	 INCH/MM		
				.XXX±.005/.XX±.13					
				.XXX±.0020/.XXX±.051			title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE		
				0°±2°					
				dr J. SHREINER 1/16/90		INCH/MM	product family QUICKIE		code -
				enr M. SMYK 1/16/90		scale			
				chr M. SMYK 1/16/90		5:1	size dwg no 65823		sheet 2 of 21
				appd M. SMYK 1/16/90					
21	sheet index	revision sheet							





NOTES:

- RECOMMENDED MOUNTING SCREW SIZE: #2-56 FILLISTER HD MACH SCREW, 3/8" LG FOR 1/16" & 3/32" BOARD, 7/16" LG FOR 1/8" BOARD.
- MOLDING MAT'L: 30% GLASS FILLED POLYESTER, FLAME RETARDANT PER UL-94V-0, COLOR: BLUE.
- PIN MAT'L: 3/4 HARD PHOS BRONZE ALLOY UNS C-51000.
- 1° MAX DRAFT PERMISSIBLE ON ALL SURFACES UNLESS OTHERWISE SPECIFIED.
- PLATING ON LEAD-IN PORTION OF PIN IS MANUFACTURING OPTION.
- B** BASIC DIM SHALL BE LOCATED SYMMETRICAL TO DATUM -Y-.
- LOW PROFILE LATCHES TO BE USED WITH FEMALE CONNECTOR WITHOUT STRAIN RELIEF. STANDARD LATCHES TO BE USED WITH FEMALE CONNECTOR WITH STRAIN RELIEF.
- .040±.003/.02±.08 DIA HOLE TYP FOR SQ PINS, .035±.003/.89±.08 DIA HOLE TYP FOR RND PINS.
- RETENTION FEATURE AVAILABLE ON CONNECTORS WITH .105/2.67, .120/3.05, OR .150/3.81 TAIL LENGTH. RETENTION P/N INCLUDES THE LETTER "R" AFTER THE EXISTING P/N.
EXAMPLE: 65823-XXX FOR EXISTING P/N
65823-XXXR FOR RETENTION P/N
RETENTION FEATURE LOCATION IS MANUFACTURERS OPTION.
 - ROUND PINS HAVE 15 LBS/6.8 KGS MAX INSERTION AND .25 LB/.1 KG MIN RETENTION FORCE WHEN USED IN .035±.003/.89±.08 DIA HOLES AND .062/1.57 THICK PC BOARD.
 - SQUARE PINS HAVE A 15 LBS/6.8 KG MAX INSERTION AND .5 LB/.2 KG MIN RETENTION FORCE WHEN USED IN .040±.003/1.02±.08 DIA HOLES AND .062/1.57 THICK PC BOARD.
- 65496-***LF IS JUST A LEAD FREE PRODUCT.
- THE HOUSING OF XXXXX-XYLF WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER PROCESS.
- PLATING OPTION: MAYBE EITHER GOLD OR GXT PLATING AT MANUFACTURER'S OPTION.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com		
ltr	ecn no	dr	date						
AF				linear	.XX±.01/.X±.3 .XXX±.005/.XX±.13 .XXX±.0020/.XXX±.051	projection	 title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE		
				angles	0°±2°	 INCH/MM			
				dr	J. SHREINER 1/16/90	scale 5:1	product family QUICKIE		code
				enrg	M. SMYK 1/16/90		size dwg no		-
				chr	M. SMYK 1/16/90		A 65823		sheet
				appd	M. SMYK 1/16/90				3 of 21
21	sheet index	revision sheet							



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-001(LF)	2x5	ND	RND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8	30u" / .76 Au OVER 50u" / 1.27uNi	A
-002(LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-003(LF)			RND				.150/3.81		30u" / .76 Au OVER 50u" / 1.27uNi	
-004(LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-005(LF)			SQ				.675/17.15		30u" / .76 Au OVER 50u" / 1.27uNi	
-006(LF)	2x5		SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.8	150u" / 3.81u Sn	A
-007(LF)	2x7		RND	1.460/37.08	.600/15.24	.920/23.37	.105/2.67	1.06/26.9	30u" / .76 Au OVER 50u" / 1.27uNi	C
-008(LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-009(LF)			RND				.150/3.81		30u" / .76 Au OVER 50u" / 1.27uNi	
-010(LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-011(LF)			SQ				.675/17.15		30u" / .76 Au OVER 50u" / 1.27uNi	
-012(LF)	2x7		SQ	1.460/37.08	.600/15.24	.920/23.37	.675/17.15	1.06/26.9	150u" / 3.81u Sn	C
-013(LF)	2x8		RND	1.560/39.62	.700/17.78	1.020/25.91	.105/2.67	1.16/29.4	30u" / .76 Au OVER 50u" / 1.27uNi	D
-014(LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-015(LF)			RND				.150/3.81		30u" / .76 Au OVER 50u" / 1.27uNi	
-016(LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-017(LF)			SQ				.675/17.15		30u" / .76 Au OVER 50u" / 1.27uNi	
-018(LF)	2x8		SQ	1.560/39.62	.700/17.78	1.020/25.91	.675/17.15	1.16/29.4	150u" / 3.81u Sn	
-019(LF)	2x10		RND	1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.5	30u" / .76 Au OVER 50u" / 1.27uNi	
-020(LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-021(LF)			RND				.150/3.81		30u" / .76 Au OVER 50u" / 1.27uNi	
-022(LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-023(LF)			SQ				.675/17.15		30u" / .76 Au OVER 50u" / 1.27uNi	
-024(LF)	2x10		SQ	1.760/44.70	.900/22.86	1.220/30.99	.675/17.15	1.36/34.5	150u" / 3.81u Sn	
-025(LF)	2x13		RND	2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.1	30u" / .76 Au OVER 50u" / 1.27uNi	
-026(LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-027(LF)			RND				.150/3.81		30u" / .76 Au OVER 50u" / 1.27uNi	
-028(LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-029(LF)			SQ				.675/17.15		30u" / .76 Au OVER 50u" / 1.27uNi	
-030(LF)	2x13		SQ	2.060/52.32	1.200/30.48	1.520/38.61	.675/17.15	1.66/42.1	150u" / 3.81u Sn	
-031(LF)	2x17		RND	2.460/62.48	1.600/40.64	1.920/48.77	.105/2.67	2.06/52.3	30u" / .76 Au OVER 50u" / 1.27uNi	
-032(LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-033(LF)			RND				.150/3.81		30u" / .76 Au OVER 50u" / 1.27uNi	
-034(LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-035(LF)			SQ				.675/17.15		30u" / .76 Au OVER 50u" / 1.27uNi	
65823-036(LF)	2x17	ND	SQ	2.460/62.48	1.600/40.64	1.920/48.77	.675/17.15	2.06/52.3	150u" / 3.81u Sn	D

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		 www.fciconnect.com			
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3			projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE			
AF					.XXX±.005/.XX±.13							
					.XXXX±.0020/.XXX±.051							
				angles	0°±2°				product family QUICKIE size dwg no A 65823			
				dr	J. SHREINER	1/16/90						
				enrg	M. SMYK	1/16/90						
				chr	M. SMYK	1/16/90						
				apdd	M. SMYK	1/16/90						
sheet index		revision sheet						scale 5:1		sheet 4 of 21		



1 | 2

3 |

4

	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-037(LF)	2x20	ND	RND	2.760/70.10	1.900/48.26	2.220/56.39	.105/2.67	2.36/59.9	30u" / .76u Au OVER 50u" / 1.27u Ni	D
↑ -038(LF)	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150u" / 3.81u Sn	↑
↑ -039(LF)	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -040(LF)	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150u" / 3.81u Sn	↑
↑ -041(LF)	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30u" / .76u Au OVER 50u" / 1.27u Ni	↓
↑ -042(LF)	2x20	↑	SQ	2.760/70.10	1.900/48.26	2.220/56.39	.675/17.15	2.36/59.9	150u" / 3.81u Sn	↑
↑ -043(LF)	2x25	↑	RND	3.260/82.80	2.400/60.96	2.720/69.09	.105/2.67	2.86/72.6	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -044(LF)	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150u" / 3.81u Sn	↑
↑ -045(LF)	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -046(LF)	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150u" / 3.81u Sn	↑
↑ -047(LF)	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30u" / .76u Au OVER 50u" / 1.27u Ni	↓
↑ -048(LF)	2x25	ND	SQ	3.260/82.80	2.400/60.96	2.720/69.09	.675/17.15	2.86/72.6	150u" / 3.81u Sn	D
↑ -049(LF)	2x5	STD	RND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8	30u" / .76u Au OVER 50u" / 1.27u Ni	A
↑ -050(LF)	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150u" / 3.81u Sn	↑
↑ -051(LF)	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -052(LF)	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150u" / 3.81u Sn	↑
↑ -053(LF)	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30u" / .76u Au OVER 50u" / 1.27u Ni	↓
↑ -054(LF)	2x5	↑	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.8	150u" / 3.81u Sn	A
↑ -055(LF)	2x7	↑	RND	1.460/37.08	.600/15.24	.920/23.37	.105/2.67	1.06/26.9	30u" / .76u Au OVER 50u" / 1.27u Ni	C
↑ -056(LF)	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150u" / 3.81u Sn	↑
↑ -057(LF)	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -058(LF)	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150u" / 3.81u Sn	↑
↑ -059(LF)	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30u" / .76u Au OVER 50u" / 1.27u Ni	↓
↑ -060(LF)	2x7	↑	SQ	1.460/37.08	.600/15.24	.920/23.37	.675/17.15	1.06/26.9	150u" / 3.81u Sn	C
↑ -061(LF)	2x8	↑	RND	1.560/39.62	.700/17.78	1.020/25.91	.105/2.67	1.16/29.4	30u" / .76u Au OVER 50u" / 1.27u Ni	D
↑ -062(LF)	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150u" / 3.81u Sn	↑
↑ -063(LF)	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -064(LF)	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150u" / 3.81u Sn	↑
↑ -065(LF)	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30u" / .76u Au OVER 50u" / 1.27u Ni	↓
↑ -066(LF)	2x8	↑	SQ	1.560/39.62	.700/17.78	1.020/25.91	.675/17.15	1.16/29.4	150u" / 3.81u Sn	↑
↑ -067(LF)	2x10	↑	RND	1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.5	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -068(LF)	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150u" / 3.81u Sn	↑
↑ -069(LF)	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -070(LF)	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150u" / 3.81u Sn	↑
↑ -071(LF)	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30u" / .76u Au OVER 50u" / 1.27u Ni	↓
65823-072(LF)	2x10	STD	SQ	1.760/44.70	.900/22.86	1.220/30.99	.675/17.15	1.36/34.5	150u" / 3.81u Sn	D

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3			projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE	
AF					.XXX±.005/.XX±.13					
					.XXXX±.0020/.XXX±.051					
				angles	0°±2°				product family QUICKIE	
				dr	J. SHREINER	1/16/90	code —			
				enr	M. SMYK	1/16/90				
				appd	M. SMYK	1/16/90				
PDM-Rev-A				STATUS			scale 5:1		Released 65823 Printed: Apr 12, 2011	
							A		sheet 5 of 21	



A

B

	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-073 <LF>	2x13	STD	RND	2. 060/52. 32	1. 200/30. 48	1. 520/38. 61	. 105/2. 67	1. 66/42. 1	30u" / . 76u Au OVER 50u" / 1. 27u Ni	D
-074 <LF>			SQ				. 105/2. 67		150u" / 3. 81u' 1/27u Ni	
-075 <LF>			RND				. 150/3. 81		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-076 <LF>			SQ				. 150/3. 81		150u" / 3. 81u' 1/27u Ni	
-077 <LF>			SQ				. 675/17. 15		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-078 <LF>	2x13		SQ	2. 060/52. 32	1. 200/30. 48	1. 520/38. 61	. 675/17. 15	1. 66/42. 1	150u" / 3. 81u' 1/27u Ni	
-079 <LF>	2x17		RND	2. 460/62. 48	1. 600/40. 64	1. 920/48. 77	. 105/2. 67	2. 06/52. 3	30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-080 <LF>			SQ				. 105/2. 67		150u" / 3. 81u' 1/27u Ni	
-081 <LF>			RND				. 150/3. 81		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-082 <LF>			SQ				. 150/3. 81		150u" / 3. 81u' 1/27u Ni	
-083 <LF>			SQ				. 675/17. 15		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-084 <LF>	2x17		SQ	2. 460/62. 48	1. 600/40. 64	1. 920/48. 77	. 675/17. 15	2. 06/52. 3	150u" / 3. 81u' 1/27u Ni	
-085 <LF>	2x20		RND	2. 760/70. 10	1. 900/48. 26	2. 220/56. 39	. 105/2. 67	2. 36/59. 9	30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-086 <LF>			SQ				. 105/2. 67		150u" / 3. 81u' 1/27u Ni	
-087 <LF>			RND				. 150/3. 81		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-088 <LF>			SQ				. 150/3. 81		150u" / 3. 81u' 1/27u Ni	
-089 <LF>			SQ				. 675/17. 15		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-090 <LF>	2x20		SQ	2. 760/70. 10	1. 900/48. 26	2. 220/56. 39	. 675/17. 15	2. 36/59. 9	150u" / 3. 81u' 1/27u Ni	
-091 <LF>	2x25		RND	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	. 105/2. 67	2. 86/72. 6	30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-092 <LF>			SQ				. 105/2. 67		150u" / 3. 81u' 1/27u Ni	
-093 <LF>			RND				. 150/3. 81		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-094 <LF>			SQ				. 150/3. 81		150u" / 3. 81u' 1/27u Ni	
-095 <LF>			SQ				. 675/17. 15		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-096 <LF>	2x25	STD	SQ	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	. 675/17. 15	2. 86/72. 6	150u" / 3. 81u' 1/27u Ni	
-097 <LF>	2x30	ND	RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3	30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-098 <LF>			SQ				. 105/2. 67		150u" / 3. 81u' 1/27u Ni	
-099 <LF>			RND				. 150/3. 81		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-100 <LF>			SQ				. 150/3. 81		150u" / 3. 81u' 1/27u Ni	
-101 <LF>			SQ				. 675/17. 15		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-102 <LF>		ND	SQ				. 675/17. 15		150u" / 3. 81u' 1/27u Ni	
-103 <LF>		STD	RND				. 105/2. 67		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-104 <LF>			SQ				. 105/2. 67		150u" / 3. 81u' 1/27u Ni	
-105 <LF>			RND				. 150/3. 81		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-106 <LF>			SQ				. 150/3. 81		150u" / 3. 81u' 1/27u Ni	
-107 <LF>			SQ				. 675/17. 15		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
65823-108 <LF>	2x30	STD	SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/17. 15	3. 36/85. 3	150u" / 3. 81u' 1/27u Ni	D


mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com		
ltr	ecn no	dr	date	linear	angles		title		
AF						projection	HEADER, QUICKIE		
							SEA, HORSE, RIGHT ANGLE		
							product family QUICKIE		
				dr	J. SHREINER	1/16/90	size dwg no		
				enr	M. SMYK	1/16/90	A		
				chr	M. SMYK	1/16/90	65823		
				appd	M. SMYK	1/16/90	sheet 6 of 21		
sheet index				revision sheet		scale 5:1			
21									

A

B



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-109(LF)	2x5	ND	SQ	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8	30u" / .76u Au OVER 50u" / 1.27u Ni	A
-110(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-111(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-112(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-113(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-114(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-115(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-116(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
-117(LF)	2x30	ND		3.760/95.50	2.900/73.66	3.220/81.79		3.36/85.3		D
-118(LF)	2x5	STD		1.260/32.00	.400/10.16	.720/18.29		.86/21.8		A
-119(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-120(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-121(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-122(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-123(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-124(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-125(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
-126(LF)	2x30	STD	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.105/2.67	3.36/85.3	30u" / .76u Au OVER 50u" / 1.27u Ni	D
-127(LF)	2x5	ND	RND	1.260/32.00	.400/10.16	.720/18.29	.150/3.81	.86/21.8	30u" / .76u GXT/GOLD FLASH	A
-128(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-129(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-130(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-131(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-132(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-133(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-134(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
-135(LF)	2x30	ND		3.760/95.50	2.900/73.66	3.220/81.79		3.36/85.3		D
-136(LF)	2x5	STD		1.260/32.00	.400/10.16	.720/18.29		.86/21.8		A
-137(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-138(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-139(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-140(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-141(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-142(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-143(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
65823-144(LF)	2x30	STD	RND	3.760/95.50	2.900/73.66	3.220/81.79	.150/3.81	3.36/85.3	30u" / .76u GXT/GOLD FLASH	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com				
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE				
AF					.XXX±.005/.XX±.13						
					.XXX±.0020/.XXX±.051						
					0°±2°						
				angles		INCH/MM ←→	product family QUICKIE				
				dr	J. SHREINER				1/16/90	code —	
				enr	M. SMYK				1/16/90		sheet 7 of 21
				chr	M. SMYK				1/16/90		
				appd	M. SMYK	1/16/90					
sheet				revision		scale		A			
21				index sheet		5:1					



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-145 (LF)	2x5	LP	RND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8	30u" / .76u Au OVER 50u" / 1.27u Ni	A
-146 (LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-147 (LF)			RND				.150/3.81		30u" / .76u Au OVER 50u" / 1.27u Ni	
-148 (LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-149 (LF)			SQ				.675/17.15		30u" / .76u Au OVER 50u" / 1.27u Ni	
-150 (LF)	2x5		SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.8	150u" / 3.81u Sn	A
-151 (LF)	2x7		RND	1.460/37.08	.600/15.24	.920/23.37	.105/2.67	1.06/26.9	30u" / .76u Au OVER 50u" / 1.27u Ni	C
-152 (LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-153 (LF)			RND				.150/3.81		30u" / .76u Au OVER 50u" / 1.27u Ni	
-154 (LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-155 (LF)			SQ				.675/17.15		30u" / .76u Au OVER 50u" / 1.27u Ni	
-156 (LF)	2x7		SQ	1.460/37.08	.600/15.24	.920/23.37	.675/17.15	1.06/26.9	150u" / 3.81u Sn	C
-157 (LF)	2x8		RND	1.560/39.62	.700/17.78	1.020/25.91	.105/2.67	1.16/29.4	30u" / .76u Au OVER 50u" / 1.27u Ni	D
-158 (LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-159 (LF)			RND				.150/3.81		30u" / .76u Au OVER 50u" / 1.27u Ni	
-160 (LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-161 (LF)			SQ				.675/17.15		30u" / .76u Au OVER 50u" / 1.27u Ni	
-162 (LF)	2x8		SQ	1.560/39.62	.700/17.78	1.020/25.91	.675/17.15	1.16/29.4	150u" / 3.81u Sn	
-163 (LF)	2x10		RND	1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.5	30u" / .76u Au OVER 50u" / 1.27u Ni	
-164 (LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-165 (LF)			RND				.150/3.81		30u" / .76u Au OVER 50u" / 1.27u Ni	
-166 (LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-167 (LF)			SQ				.675/17.15		30u" / .76u Au OVER 50u" / 1.27u Ni	
-168 (LF)	2x10		SQ	1.760/44.70	.900/22.86	1.220/30.99	.675/17.15	1.36/34.5	150u" / 3.81u Sn	
-169 (LF)	2x13		RND	2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.1	30u" / .76u Au OVER 50u" / 1.27u Ni	
-170 (LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-171 (LF)			RND				.150/3.81		30u" / .76u Au OVER 50u" / 1.27u Ni	
-172 (LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-173 (LF)			SQ				.675/17.15		30u" / .76u Au OVER 50u" / 1.27u Ni	
-174 (LF)	2x13		SQ	2.060/52.32	1.200/30.48	1.520/38.61	.675/17.15	1.66/42.1	150u" / 3.81u Sn	
-175 (LF)	2x17		RND	2.460/62.48	1.600/40.64	1.920/48.77	.105/2.67	2.06/52.3	30u" / .76u Au OVER 50u" / 1.27u Ni	
-176 (LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-177 (LF)			RND				.150/3.81		30u" / .76u Au OVER 50u" / 1.27u Ni	
-178 (LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-179 (LF)			SQ				.675/17.15		30u" / .76u Au OVER 50u" / 1.27u Ni	
65823-180 (LF)	2x17	LP	SQ	2.460/62.48	1.600/40.64	1.920/48.77	.675/17.15	2.06/52.3	150u" / 3.81u Sn	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI www.fciconnect.com		
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection INCH/MM	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE	product family QUICKIE	code -	
AF					.XXX±.005/.XX±.13					
					.XXX±.0020/.XXX±.051					
				angles	0°±2°	scale 5:1	A	65823	sheet 8 of 21	
				dr	J. SHREINER					1/16/90
				enr	M. SMYK					1/16/90
				chr	M. SMYK					1/16/90
				appd	M. SMYK	1/16/90				
sheet index		revision sheet								
21										





	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-181(LF)	2x20	LP	RND	2. 760/70. 10	1. 900/48. 26	2. 220/56. 39	. 105/2. 67	2. 36/59. 9	30u" / . 76u OVER 50u" / 1. 27u Ni	D
-182(LF)			SQ				. 105/2. 67		150u" / 3. 81u Sn	
-183(LF)			RND				. 150/3. 81		30u" / . 76u OVER 50u" / 1. 27u Ni	
-184(LF)			SQ				. 150/3. 81		150u" / 3. 81u Sn	
-185(LF)			SQ				. 675/17. 15		30u" / . 76u OVER 50u" / 1. 27u Ni	
-186(LF)	2x20		SQ	2. 760/70. 10	1. 900/48. 26	2. 220/56. 39	. 675/17. 15	2. 36/59. 9	150u" / 3. 81u Sn	
-187(LF)	2x25		RND	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	. 105/2. 67	2. 86/72. 6	30u" / . 76u OVER 50u" / 1. 27u Ni	
-188(LF)			SQ				. 105/2. 67		150u" / 3. 81u Sn	
-189(LF)			RND				. 150/3. 81		30u" / . 76u OVER 50u" / 1. 27u Ni	
-190(LF)			SQ				. 150/3. 81		150u" / 3. 81u Sn	
-191(LF)			SQ				. 675/17. 15		30u" / . 76u OVER 50u" / 1. 27u Ni	
-192(LF)	2x25		SQ	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	. 675/17. 15	2. 86/72. 6	150u" / 3. 81u Sn	
-193(LF)	2x30		RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3	30u" / . 76u OVER 50u" / 1. 27u Ni	
-194(LF)			SQ				. 105/2. 67		150u" / 3. 81u Sn	
-195(LF)			RND				. 150/3. 81		30u" / . 76u OVER 50u" / 1. 27u Ni	
-196(LF)			SQ				. 150/3. 81		150u" / 3. 81u Sn	
-197(LF)			SQ				. 675/17. 15		30u" / . 76u OVER 50u" / 1. 27u Ni	
-198(LF)	2x30			3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/17. 15	3. 36/85. 3	150u" / 3. 81u Sn	D
-199(LF)	2x5			1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2. 67	. 86/21. 8	30u" / . 76u OVER 50u" / 1. 27u Ni	A
-200(LF)	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 9		C
-201(LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-202(LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		
-203(LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-204(LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-205(LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-206(LF)	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 6		
-207(LF)	2x30		SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3	30u" / . 76u OVER 50u" / 1. 27u Ni	D
-208(LF)	2x5		RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3. 81	. 86/21. 8	30u" / . 76u GXT/GOLD FLASH	A
-209(LF)	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 9		C
-210(LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-211(LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		
-212(LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-213(LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-214(LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-215(LF)	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 6		
65823-216(LF)	2x30	LP	RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 150/3. 81	3. 36/85. 3	30u" / . 76u GXT/GOLD FLASH	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI www.fciconnect.com			
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection INCH/MM	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE	product family QUICKIE	code -		
AF					.XXX±.005/.XX±.13						
					.XXX±.0020/.XXX±.051						
					angles 0°±2°						
				dr	J. SHREINER	1/16/90	scale 5:1	A	65823	sheet 9 of 21	
				enr	M. SMYK	1/16/90					
				chr	M. SMYK	1/16/90					
				appd	M. SMYK	1/16/90					
sheet index		revision sheet									




	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-217(LF)	2x5	ND	RND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8	30u" / .76u GXT/GOLD FLASH	A
-218(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-219(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-220(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-221(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-222(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-223(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-224(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
-225(LF)	2x30		RND	3.760/95.50	2.900/73.66	3.220/81.79	.105/2.67	3.36/85.3		D
-226(LF)	2x5		SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.8		A
-227(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-228(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-229(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-230(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-231(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-232(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-233(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
-234(LF)	2x30	ND	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.675/17.15	3.36/85.3		D
-235(LF)	2x5	STD	RND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8		A
-236(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-237(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-238(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-239(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-240(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-241(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-242(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
-243(LF)	2x30		RND	3.760/95.50	2.900/73.66	3.220/81.79	.105/2.67	3.36/85.3		D
-244(LF)	2x5		SQ	1.260/32.00	.400/10.16	.720/18.29	.150/3.81	.86/21.8		A
-245(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-246(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-247(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-248(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-249(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-250(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-251(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
65823-252(LF)	2x30	STD	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.150/3.81	3.36/85.3	30u" / .76u GXT/GOLD FLASH	D

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		 www.fciconnect.com						
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3			projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE						
AF					.XXX±.005/.XX±.13										
					.XXX±.0020/.XXX±.051										
				angles	0°±2°				product family QUICKIE			code —			
				dr	J. SHREINER	1/16/90									
				enr	M. SMYK	1/16/90	size dwg no A 65823								
				chr	M. SMYK	1/16/90									
				appd	M. SMYK	1/16/90				scale 5:1		sheet 10 of 21			
	sheet index	revision sheet													
21															




	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-253(LF)	2x5	LP	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2. 67	. 86/21. 8	30u" / . 76u GXT/GOLD FLASH	A
↑ -254(LF)	2x7	↑	↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9	↑	C
-255(LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-256(LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-257(LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-258(LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-259(LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-260(LF)	2x25		↓	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		↓
-261(LF)	2x30		RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3		D
-262(LF)	2x5		SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 675/17. 15	. 86/21. 8		A
-263(LF)	2x7		↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9		C
-264(LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-265(LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-266(LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-267(LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-268(LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-269(LF)	2x25	↓	↓	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		↓
-270(LF)	2x30	LP	SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/17. 15	3. 36/85. 3	30u" / . 76u GXT/GOLD FLASH	D
-271(LF)	2x5	ND	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2. 67	. 86/21. 8	15u" . 38u Au OVER 50u" /1. 27u Ni	A
-272(LF)	2x7	↑	↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9	↑	C
-273(LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-274(LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-275(LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-276(LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-277(LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-278(LF)	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		↓
-279(LF)	2x30			3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3		D
-280(LF)	2x5			1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3. 81	. 86/21. 8		A
-281(LF)	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9		C
-282(LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-283(LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-284(LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-285(LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-286(LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
↓ -287(LF)	2x25	↓	↓	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		↓
65823-288(LF)	2x30	ND	RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 150/3. 81	3. 36/85. 3	15u" . 38u Au OVER 50u" /1. 27u Ni	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE	
AF					.XXX±.005/.XX±.13			
					.XXX±.0020/.XXX±.051			
				angles	0°±2°	INCH/MM ←→ scale 5:1	product family QUICKIE size dwg no A 65823	
				dr	J. SHREINER 1/16/90			
				enrg	M. SMYK 1/16/90			
				chr	M. SMYK 1/16/90			
				appd	M. SMYK 1/16/90		sheet 11 of 21	
	sheet index	revision sheet						
21								




	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-289<LF>	2x5	ND	SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2. 67	. 86/21. 8	15u". 38u Au OVER 50u"/1. 27u Ni	A
↑ -290<LF>	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 9		C
-291<LF>	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-292<LF>	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-293<LF>	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-294<LF>	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-295<LF>	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-296<LF>	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 6		↓
-297<LF>	2x30	ND	SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3		D
-298<LF>	2x5	STD	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 675/17. 15	. 86/21. 8		A
-299<LF>	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 9		C
-300<LF>	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-301<LF>	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-302<LF>	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-303<LF>	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-304<LF>	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-305<LF>	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 6		↓
-306<LF>	2x30			3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/17. 15	3. 36/85. 3		D
-307<LF>	2x5			1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2. 67	. 86/21. 8		A
-308<LF>	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 9		C
-309<LF>	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-310<LF>	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-311<LF>	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-312<LF>	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-313<LF>	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-314<LF>	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 6		↓
-315<LF>	2x30		RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3		D
-316<LF>	2x5		SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3. 81	. 86/21. 8		A
-317<LF>	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 9		C
-318<LF>	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-319<LF>	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-320<LF>	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-311<LF>	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-312<LF>	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
↓ -313<LF>	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 6		↓
65823-313<LF>	2x30	STD	SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 150/3. 81	3. 36/85. 3	15u". 38u Au OVER 50u"/1. 27u Ni	D

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3			projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE		
AF					.XXX±.005/.XX±.13						
					.XXX±.0020/.XXX±.051						
					angles	0°±2°					
					dr	J. SHREINER	1/16/90				
				enr	M. SMYK	1/16/90	INCH/MM ←→	product family size	QUICKIE dwg no		code —
				chr	M. SMYK	1/16/90					
				appd	M. SMYK	1/16/90					
							scale	5:1	A	65823	sheet 12 of 21
	sheet index	revision sheet									
21											



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-325 (LF)	2x5	LP	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2. 67	. 86/21. 8	15u" / . 38u Au OVER 50u" / 1. 27u Ni	A
↑ -326 (LF)	2x7	↑	↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9	↑	C
-327 (LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-328 (LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-329 (LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		↑
-330 (LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-331 (LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-332 (LF)	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		↓
-333 (LF)	2x30			3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3		D
-334 (LF)	2x5			1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3. 81	. 86/21. 8		A
-335 (LF)	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9		C
-336 (LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-337 (LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-338 (LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		↑
-339 (LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-340 (LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-341 (LF)	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		↓
-342 (LF)	2x30		RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 150/3. 81	3. 36/85. 3		D
-343 (LF)	2x5		SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 675/17. 15	. 86/21. 8		A
-344 (LF)	2x7		↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9		C
-345 (LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-346 (LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-347 (LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		↑
-348 (LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-349 (LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-350 (LF)	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		
-351 (LF)	2x30	LP	SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/17. 15	3. 36/85. 3	15u" / . 38u Au OVER 50u" / 1. 27u Ni	↓
-352 (LF)	2x25	66258	RND	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	. 105/2. 67	2. 86/72. 6	30u" / . 76u Au OVER 50u" / 1. 27u Ni	D
-353 (LF)	2x7	ND	↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9		C
-354 (LF)	2x8	↑		1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-355 (LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-356 (LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		↑
-357 (LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		↑
-358 (LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		↑
↓ -359 (LF)	2x25	↓	↓	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		↓
65823-360 (LF)	2x30	ND	RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3	30u" / . 76u Au OVER 50u" / 1. 27u Ni	D

*CUSTOMER SPECIAL

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com		
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE		
AF					.XXX±.005/.XX±.13				
					.XXX±.0020/.XXX±.051				
					0°±2°				
				angles	0°±2°	INCH/MM ←→	product family QUICKIE		
				dr	J. SHREINER 1/16/90			size dwg no	
				enr	M. SMYK 1/16/90				code —
				chr	M. SMYK 1/16/90				
				appd	M. SMYK 1/16/90	sheet 13 of 21			
sheet		revision							
index		sheet							




	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-361(LF)	2x5	ND	RND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8	30u"/.76u Au OVER 50u"/1.27u Ni	A
-362(LF)		ND	RND						30u"/.76u Au OVER 50u"/1.27u Ni	B
-363(LF)		ND	RND						15"/.38u Au OVER 50u"/1.27u Ni	
-364(LF)		ND	RND						30u"/.76u GXT/GOLD FLASH	
-365(LF)		ND	SQ						150u"/3.81u Sn	
-366(LF)		STD	RND						30u"/.76u Au OVER 50u"/1.27u Ni	
-367(LF)		STD	RND						15"/.38u Au OVER 50u"/1.27u Ni	
-368(LF)		STD	RND						30u"/.76u GXT/GOLD FLASH	
-369(LF)		STD	SQ						150u"/3.81u Sn	
-370(LF)		LP	RND						30u"/.76u Au OVER 50u"/1.27u Ni	
-371(LF)		LP	RND						15"/.38u Au OVER 50u"/1.27u Ni	
-372(LF)		LP	RND						30u"/.76u GXT/GOLD FLASH	
-373(LF)		LP	SQ				.105/2.67		150u"/3.81u Sn	
-374(LF)		ND	RND				.150/3.81		30u"/.76u Au OVER 50u"/1.27u Ni	
-375(LF)		ND	RND						15"/.38u Au OVER 50u"/1.27u Ni	
-376(LF)		ND	RND						30u"/.76u GXT/GOLD FLASH	
-377(LF)		ND	SQ						150u"/3.81u Sn	
-378(LF)		STD	RND						30u"/.76u Au OVER 50u"/1.27u Ni	
-379(LF)		STD	RND						15"/.38u Au OVER 50u"/1.27u Ni	
-380(LF)		STD	RND						30u"/.76u GXT/GOLD FLASH	
-381(LF)		STD	SQ						150u"/3.81u Sn	
-382(LF)		LP	RND						30u"/.76u Au OVER 50u"/1.27u Ni	
-383(LF)		LP	RND						15"/.38u Au OVER 50u"/1.27u Ni	
-384(LF)		LP	RND						30u"/.76u GXT/GOLD FLASH	
-385(LF)		LP	SQ				.150/3.81		150u"/3.81u Sn	
-386(LF)		ND	SQ				.675/17.15		30u"/.76u Au OVER 50u"/1.27u Ni	
-387(LF)		ND							15"/.38u Au OVER 50u"/1.27u Ni	
-388(LF)		ND							30u"/.76u GXT/GOLD FLASH	
-389(LF)		ND							150u"/3.81u Sn	
-390(LF)		STD							30u"/.76u Au OVER 50u"/1.27u Ni	
-391(LF)		STD							15"/.38u Au OVER 50u"/1.27u Ni	
-392(LF)		STD							30u"/.76u GXT/GOLD FLASH	
-393(LF)		STD							150u"/3.81u Sn	
-394(LF)		LP							30u"/.76u Au OVER 50u"/1.27u Ni	
-395(LF)		LP							15"/.38u Au OVER 50u"/1.27u Ni	
65823-396(LF)	2x5	LP	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.8	30u"/.76u GXT/GOLD FLASH	B

*CUSTOMER SPECIAL

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3			projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE		
AF					.XXX±.005/.XX±.13						
					.XXX±.0020/.XXX±.051						
				angles	0°±2°				product family QUICKIE		
				dr	J. SHREINER	1/16/90	scale 5:1				
				enr	M. SMYK	1/16/90					
				chr	M. SMYK	1/16/90					
				appd	M. SMYK	1/16/90					
sheet index				revision sheet						A	
21										65823	
										14 of 21	



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-397(LF)	2x5	LP	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.8	150u"/3.81u Sn	B
-398(LF)	2x10	66258-001	RND	1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.5	30u"/.76u Au OVER 50u"/1.27u Ni	D
-399(LF)	2x5	ND	SQ	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8	15u"/.38u Au OVER 50u"/1.27u Ni	A
-400(LF)		STD					.105/2.67			
-401(LF)		LP					.105/2.67			
-402(LF)		ND					.150/3.81			
-403(LF)		STD					.150/3.81			
-404(LF)		LP					.150/3.81			A
-405(LF)		ND					.105/2.67			B
-406(LF)		STD					.105/2.67			
-407(LF)		LP					.105/2.67			
-408(LF)		ND					.150/3.81			
-409(LF)		STD					.150/3.81			
-410(LF)	2x5	LP		1.260/32.00	.400/10.16	.720/18.29	.150/3.81	.86/21.8		B
-411(LF)	2x7	ND		1.460/37.08	.600/15.24	.920/23.37	.105/2.67	1.06/26.9		C
-412(LF)		STD					.105/2.67			
-413(LF)		LP					.105/2.67			
-414(LF)		ND					.150/3.81			
-415(LF)		STD					.150/3.81			
-416(LF)	2x7	LP		1.460/37.08	.600/15.24	.920/23.37	.150/3.81	1.06/26.9		C
-417(LF)	2x8	ND		1.560/39.62	.700/17.78	1.020/25.91	.105/2.67	1.16/29.4		D
-418(LF)		STD					.105/2.67			
-419(LF)		LP					.105/2.67			
-420(LF)		ND					.150/3.81			
-421(LF)		STD					.150/3.81			
-422(LF)	2x8	LP		1.560/39.62	.700/17.78	1.020/25.91	.150/3.81	1.16/29.4		
-423(LF)	2x10	ND		1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.5		
-424(LF)		STD					.105/2.67			
-425(LF)		LP					.105/2.67			
-426(LF)		ND					.150/3.81			
-427(LF)		STD					.150/3.81			
-428(LF)	2x10	LP		1.760/44.70	.900/22.86	1.220/30.99	.150/3.81	1.36/34.5		
-429(LF)	2x13	ND		2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.1		
-430(LF)		STD					.105/2.67			
-431(LF)		LP					.105/2.67			
65823-432(LF)	2x13	ND	SQ	2.060/52.32	1.200/30.48	1.520/38.61	.150/3.81	1.66/42.1	15u"/.38u Au OVER 50u"/1.27u Ni	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com			
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE	product family QUICKIE	code —	
AF					.XXX±.005/.XX±.13					
					.XXX±.0020/.XXX±.051					
				angles	0°±2°	INCH/MM ←→	scale 5:1	size A	sheet 15 of 21	
				dr	J. SHREINER					1/16/90
				enr	M. SMYK					1/16/90
				chr	M. SMYK	1/16/90				
				appd	M. SMYK	1/16/90				
sheet index		revision sheet								
21										



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-433<LF>	2x13	STD	SQ	2.060/52.32	1.200/30.48	1.520/38.61	.150/3.81	1.66/42.1	15u" / .38u Au OVER 50u" / 1.27u Ni	D
-434<LF>	2x13	LP		2.060/52.32	1.200/30.48	1.520/38.61	.150/3.81	1.66/42.1		
-435<LF>	2x17	ND		2.460/62.48	1.600/40.64	1.920/48.77	.105/2.67	2.06/52.3		
-436<LF>		STD					.105/2.67			
-437<LF>		LP					.105/2.67			
-438<LF>		ND					.150/3.81			
-439<LF>		STD					.150/3.81			
-440<LF>	2x17	LP		2.460/62.48	1.600/40.64	1.920/48.77	.150/3.81	2.06/52.3		
-441<LF>	2x20	ND		2.760/70.10	1.900/48.26	2.220/56.39	.105/2.67	2.36/59.9		
-442<LF>		STD					.105/2.67			
-443<LF>		LP					.105/2.67			
-444<LF>		ND					.150/3.81			
-445<LF>		STD					.150/3.81			
-446<LF>	2x20	LP		2.760/70.10	1.900/48.26	2.220/56.39	.150/3.81	2.36/59.9		
-447<LF>	2x25	ND		3.260/82.80	2.400/60.96	2.720/69.09	.105/2.67	2.86/72.6		
-448<LF>		STD					.105/2.67			
-449<LF>		LP					.105/2.67			
-450<LF>		ND					.150/3.81			
-451<LF>		STD					.150/3.81			
-452<LF>	2x25	LP		3.260/82.80	2.400/60.96	2.720/69.09	.150/3.81	2.86/72.6		
-453<LF>	2x30	ND		3.760/95.50	2.900/73.66	3.220/81.79	.105/2.67	3.36/85.3		
-454<LF>		STD					.105/2.67			
-455<LF>		LP					.105/2.67			
-456<LF>		ND					.150/3.81			
-457<LF>		STD					.150/3.81			
-458<LF>	2x30	LP	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.150/3.81	3.36/85.3		
-459<LF>	2x12	ND	RND	1.960/49.80	1.100/27.94	1.420/36.07	.105/2.67	1.56/39.6		
-460<LF>		STD								
-461<LF>		LP							15u" / .38u Au OVER 50u" / 1.27u Ni	
-462<LF>		ND							30u" / .76u Au OVER 50u" / 1.27u Ni	
-463<LF>		STD							30u" / .76u Au OVER 50u" / 1.27u Ni	
-464<LF>		LP							30u" / .76u Au OVER 50u" / 1.27u Ni	
-465<LF>		ND							30u" / .76u GXT/GOLD FLASH	
-466<LF>		STD							30u" / .76u GXT/GOLD FLASH	
-467<LF>		LP	RND						30u" / .76u GXT/GOLD FLASH	
65823-468<LF>	2x12	ND	SQ	1.960/49.80	1.100/27.94	1.420/36.07	.105/2.67	1.56/39.6	150u" / 3.81u Sn	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com		
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection INCH/MM	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE		
AF					.XXX±.005/.XX±.13				
					.XXX±.0020/.XXX±.051				
					angles 0°±2°				
				dr	J. SHREINER	1/16/90	scale 5:1	product family QUICKIE	
				engr	M. SMYK	1/16/90			size A
				chr	M. SMYK	1/16/90			
				appd	M. SMYK	1/16/90			
sheet index		revision sheet						code —	
21								sheet 16 of 21	




	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-469(LF)	2x12	STD	SQ	1. 960/49. 80	1. 100/27. 94	1. 420/36. 07	. 105/2. 67	1. 56/39. 62	150u"/3. 81u TIN	D
-470(LF)		LP	SQ				. 105/2. 67		150u"/3. 81u TIN	
-471(LF)		ND	RND				. 150/3. 81		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-472(LF)		STD							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-473(LF)		LP							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-474(LF)		ND							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-475(LF)		STD							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-476(LF)		LP							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-477(LF)		ND							30u"/. 76u GXT/GOLD FLASH	
-478(LF)		STD							30u"/. 76u GXT/GOLD FLASH	
-479(LF)		LP	RND						30u"/. 76u GXT/GOLD FLASH	
-480(LF)		ND	SQ						150u"/3. 81u TIN	
-481(LF)		STD							150u"/3. 81u TIN	
-482(LF)		LP					. 150/3. 81		150u"/3. 81u TIN	
-483(LF)		ND					. 105/2. 67		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-484(LF)		STD							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-485(LF)		LP							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-486(LF)		ND							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-487(LF)		STD							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-488(LF)		LP							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-489(LF)		ND							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-490(LF)		STD							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-491(LF)		LP					. 105/2. 67		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-492(LF)		ND					. 675/17. 15		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-493(LF)		STD							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-494(LF)		LP							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-495(LF)		ND							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-496(LF)		STD							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-497(LF)		LP							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-498(LF)		ND							30u"/. 76u GXT/GOLD FLASH	
-499(LF)		STD							30u"/. 76u GXT/GOLD FLASH	
-500(LF)		LP							30u"/. 76u GXT/GOLD FLASH	
-501(LF)		ND							150u"/3. 81u TIN	
-502(LF)		STD							150u"/3. 81u TIN	
-503(LF)	2x12	LP	SQ	1. 960/49. 80	1. 100/27. 94	1. 420/36. 07	. 675/17. 15	1. 56/39. 62	150u"/3. 81u TIN	
65823-504(LF)	2x15	ND	RND	2. 260/57. 40	1. 400/35. 56	1. 720/43. 69	. 105/2. 67	1. 86/47. 24	15u"/. 38u Au OVER 50u"/1. 27u Ni	D

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3			projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE		
AF					.XXX±.005/.XX±.13						
					.XXXX±.0020/.XXX±.051						
					0°±2°						
				angles				INCH/MM ←→	product family QUICKIE		code —
				dr	J. SHREINER	1/16/90					
				enrg	M. SMYK	1/16/90					
				chr	M. SMYK	1/16/90					
				appd	M. SMYK	1/16/90					
							scale	5:1		sheet 17 of 21	
sheet index				revision sheet							
21											



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-505(LF)	2x15	STD	RND	2. 260/57. 40	1. 400/35. 56	1. 720/43. 69	. 105/2. 67	1. 86/47. 2	15u" / . 38u Au OVER 50u" / 1. 27u Ni	D
-506(LF)		LP							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-507(LF)		ND							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-508(LF)		STD							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-509(LF)		LP							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-510(LF)		ND							30u" / . 76u GXT GOLD FLASH	
-511(LF)		STD							30u" / . 76u GXT GOLD FLASH	
-512(LF)		LP	RND						30u" / . 76u GXT GOLD FLASH	
-513(LF)		ND	SQ						150u" / 3. 81u TIN	
-514(LF)		STD	SQ						150u" / 3. 81u TIN	
-515(LF)		LP	SQ				. 105/2. 67		150u" / 3. 81u TIN	
-516(LF)		ND	RND				. 150/3. 81		15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-517(LF)		STD							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-518(LF)		LP							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-519(LF)		ND							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-520(LF)		STD							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-521(LF)		LP							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-522(LF)		ND							30u" / . 76u GXT GOLD FLASH	
-523(LF)		STD							30u" / . 76u GXT GOLD FLASH	
-524(LF)		LP	RND						30u" / . 76u GXT GOLD FLASH	
-525(LF)		ND	SQ						150u" / 3. 81u TIN	
-526(LF)		STD							150u" / 3. 81u TIN	
-527(LF)		LP					. 150/3. 81		150u" / 3. 81u TIN	
-528(LF)		ND					. 105/2. 67		15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-529(LF)		STD							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-530(LF)		LP							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-531(LF)		ND							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-532(LF)		STD							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-533(LF)		LP					. 105/2. 67		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-534(LF)		ND					. 150/3. 81		15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-535(LF)		STD					. 150/3. 81		15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-536(LF)		LP					. 150/3. 81		15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-537(LF)		ND					. 675/17. 15		15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-538(LF)		STD							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-539(LF)		LP							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
65823-540(LF)	2x15	ND	SQ	2. 260/57. 40	1. 400/35. 56	1. 720/43. 69	. 675/17. 15	1. 86/47. 2	30u" / . 76u Au OVER 50u" / 1. 27u Ni	D

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		 www.fciconnect.com		
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3			projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE			
AF					.XXX±.005/.XX±.13							
					.XXX±.0020/.XXX±.051							
				angles	0°±2°			INCH/MM scale 5:1	product family QUICKIE size dwg no A 65823			
				dr	J. SHREINER	1/16/90						
				enrg	M. SMYK	1/16/90						
				chr	M. SMYK	1/16/90						
				appd	M. SMYK	1/16/90				sheet 18 of 21		
sheet index		revision sheet										
21												





	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-541(LF)	2x15	STD	SQ	2. 260/57. 40	1. 400/35. 56	1. 720/48. 69	. 675/17. 15	1. 86/47. 2	30u" / . 76u Au OVER 50u" / 1. 27u Ni	D
-542(LF)		LP							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-543(LF)		ND							30u" / . 76u GXT/GOLD FLASH	
-544(LF)		STD							30u" / . 76u GXT/GOLD FLASH	
-545(LF)		LP							30u" / . 76u GXT/GOLD FLASH	
-546(LF)		ND							150u" / 3. 81u TIN	
-547(LF)		STD							150u" / 3. 81u TIN	
-548(LF)	2x15	LP	SQ	2. 260/57. 40	1. 400/35. 56	1. 720/43. 69	. 675/17. 15	1. 86/47. 2	150u" / 3. 81u TIN	
-549(LF)	2x22	ND	RND	2. 960/75. 20	2. 100/53. 34	2. 420/61. 47	. 105/2. 67	2. 56/65. 0	15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-550(LF)		STD							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-551(LF)		LP							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-552(LF)		ND							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-553(LF)		STD							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-554(LF)		LP							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-555(LF)		ND							30u" / . 76u GXT/GOLD FLASH	
-556(LF)		STD							30u" / . 76u GXT/GOLD FLASH	
-557(LF)		LP	RND						30u" / . 76u GXT/GOLD FLASH	
-558(LF)		ND	SQ						150u" / 3. 81u TIN	
-559(LF)		STD	SQ						150u" / 3. 81u TIN	
-560(LF)		LP	SQ				. 105/2. 67		150u" / 3. 81u TIN	
-561(LF)		ND	RND				. 150/3. 81		15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-562(LF)		STD							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-563(LF)		LP							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-564(LF)		ND							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-565(LF)		STD							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-566(LF)		LP							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-567(LF)		ND							30u" / . 76u GXT/GOLD FLASH	
-568(LF)		STD							30u" / . 76u GXT/GOLD FLASH	
-569(LF)		LP	RND						30u" / . 76u GXT/GOLD FLASH	
-570(LF)		ND	SQ						150u" / 3. 81u TIN	
-571(LF)		STD							150u" / 3. 81u TIN	
-572(LF)		LP					. 150/3. 81		150u" / 3. 81u TIN	
-573(LF)		ND					. 105/2. 67		15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-574(LF)		STD							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-575(LF)		LP							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
65823-576(LF)	2x22	ND	SQ	2. 960/75. 20	2. 100/53. 34	2. 420/61. 47	. 105/2. 67	2. 56/65. 0	30u" / . 76u Au OVER 50u" / 1. 27u Ni	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com		
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE		
AF					.XXX±.005/.XX±.13				
					.XXX±.0020/.XXX±.051				
				angles	0°±2°	INCH/MM 	product family QUICKIE size 19 of 21		
				dr	J. SHREINER				1/16/90
				enr	M. SMYK				1/16/90
				chr	M. SMYK				1/16/90
				appd	M. SMYK	1/16/90	scale	5:1	
sheet index		revision sheet							
21									

[illegible][illegible]



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM F	TERMINAL PLATING NOTE 12	STYLE
65823-609 (LF)	2X5	-	RND	32.00	10.16	18.29	2.67	7.24	50u"/1.27 u Au OVER 50u"/1.27u Ni	A
-610 (LF)	2X5	-	↑	32.00	10.16	18.29	↑	↑	↑	B
-611 (LF)	2X7	-	↑	37.00	15.24	23.37	↑	↑	↑	C
-612 (LF)	2X8	-	↑	39.60	17.18	25.91	↑	↑	↑	D
-613 (LF)	2X10	-	↑	44.70	22.86	30.99	↑	↑	↑	↑
-614 (LF)	2X13	-	↑	52.30	30.48	38.61	↑	↑	↑	↑
-615 (LF)	2X17	-	↑	62.40	40.64	48.77	↑	↑	↑	↑
-616 (LF)	2X20	-	↑	70.10	48.26	56.39	↑	↑	↑	↑
-617 (LF)	2X25	-	↑	82.80	60.96	69.09	↑	↑	↑	↓
-618 (LF)	2X30	-	↑	95.50	76.66	81.79	↑	↑	↑	D
-619 (LF)	2X5	STD	↑	32.00	10.16	18.29	↑	↑	↑	A
-620 (LF)	2X5	↑	↑	32.00	10.16	18.29	↑	↑	↑	B
-621 (LF)	2X7	↑	↑	37.00	15.24	23.37	↑	↑	↑	C
-622 (LF)	2X8	↑	↑	39.60	17.18	25.91	↑	↑	↑	D
-623 (LF)	2X10	↑	↑	44.70	22.86	30.99	↑	↑	↑	↑
-624 (LF)	2X13	↑	↑	52.30	30.48	38.61	↑	↑	↑	↑
-625 (LF)	2X17	↑	↑	62.40	40.64	48.77	↑	↑	↑	↑
-626 (LF)	2X20	↑	↑	70.10	48.26	56.39	↑	↑	↑	↑
-627 (LF)	2X25	↑	↑	82.80	60.96	69.09	↑	↑	↑	↑
-628 (LF)	2X30	STD	RND	95.50	76.66	81.79	2.67	7.24	50u"/1.27 u Au OVER 50u"/1.27u Ni	D

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		 www.fciconnect.com		
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3		projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE			
AF					.XXX±.005/.XX±.13						
					.XXXX±.0020/.XXX±.051						
				angles	0°±2°			product family QUICKIE size/ dwg no			
				dr	J. SHREINER	1/16/90					
				engr	M. SMYK	1/16/90					
				chr	M. SMYK	1/16/90	scale 5:1	A 65823			
				appd	M. SMYK	1/16/90					
	sheet index	revision sheet									
21											