
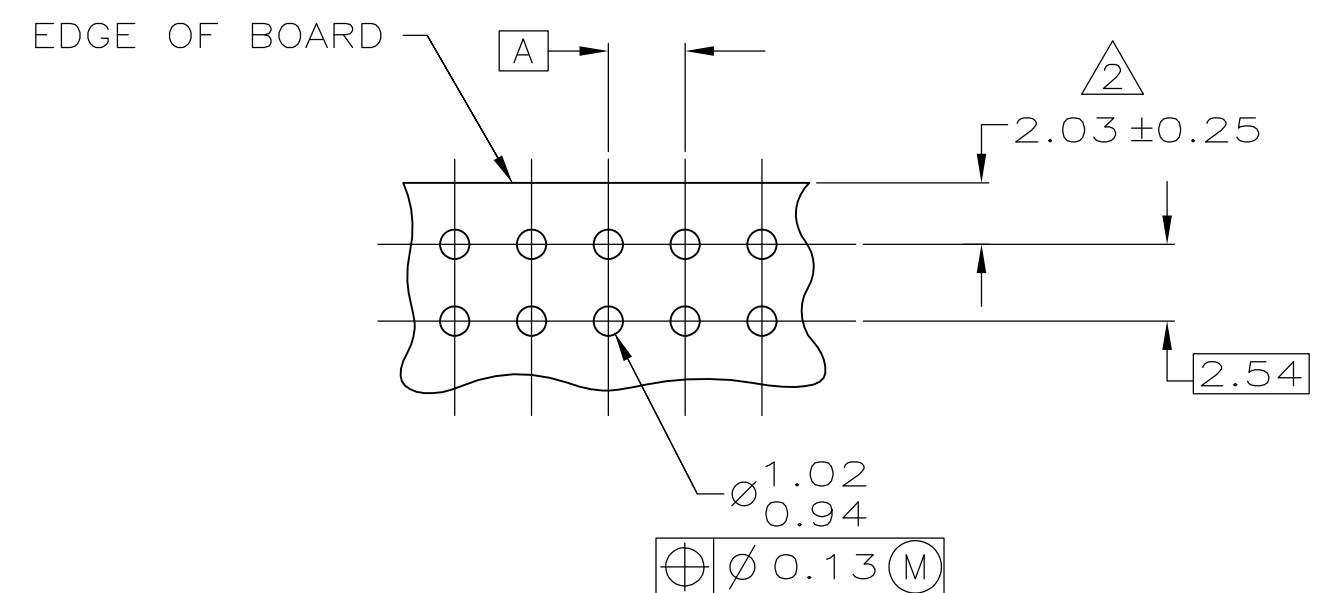
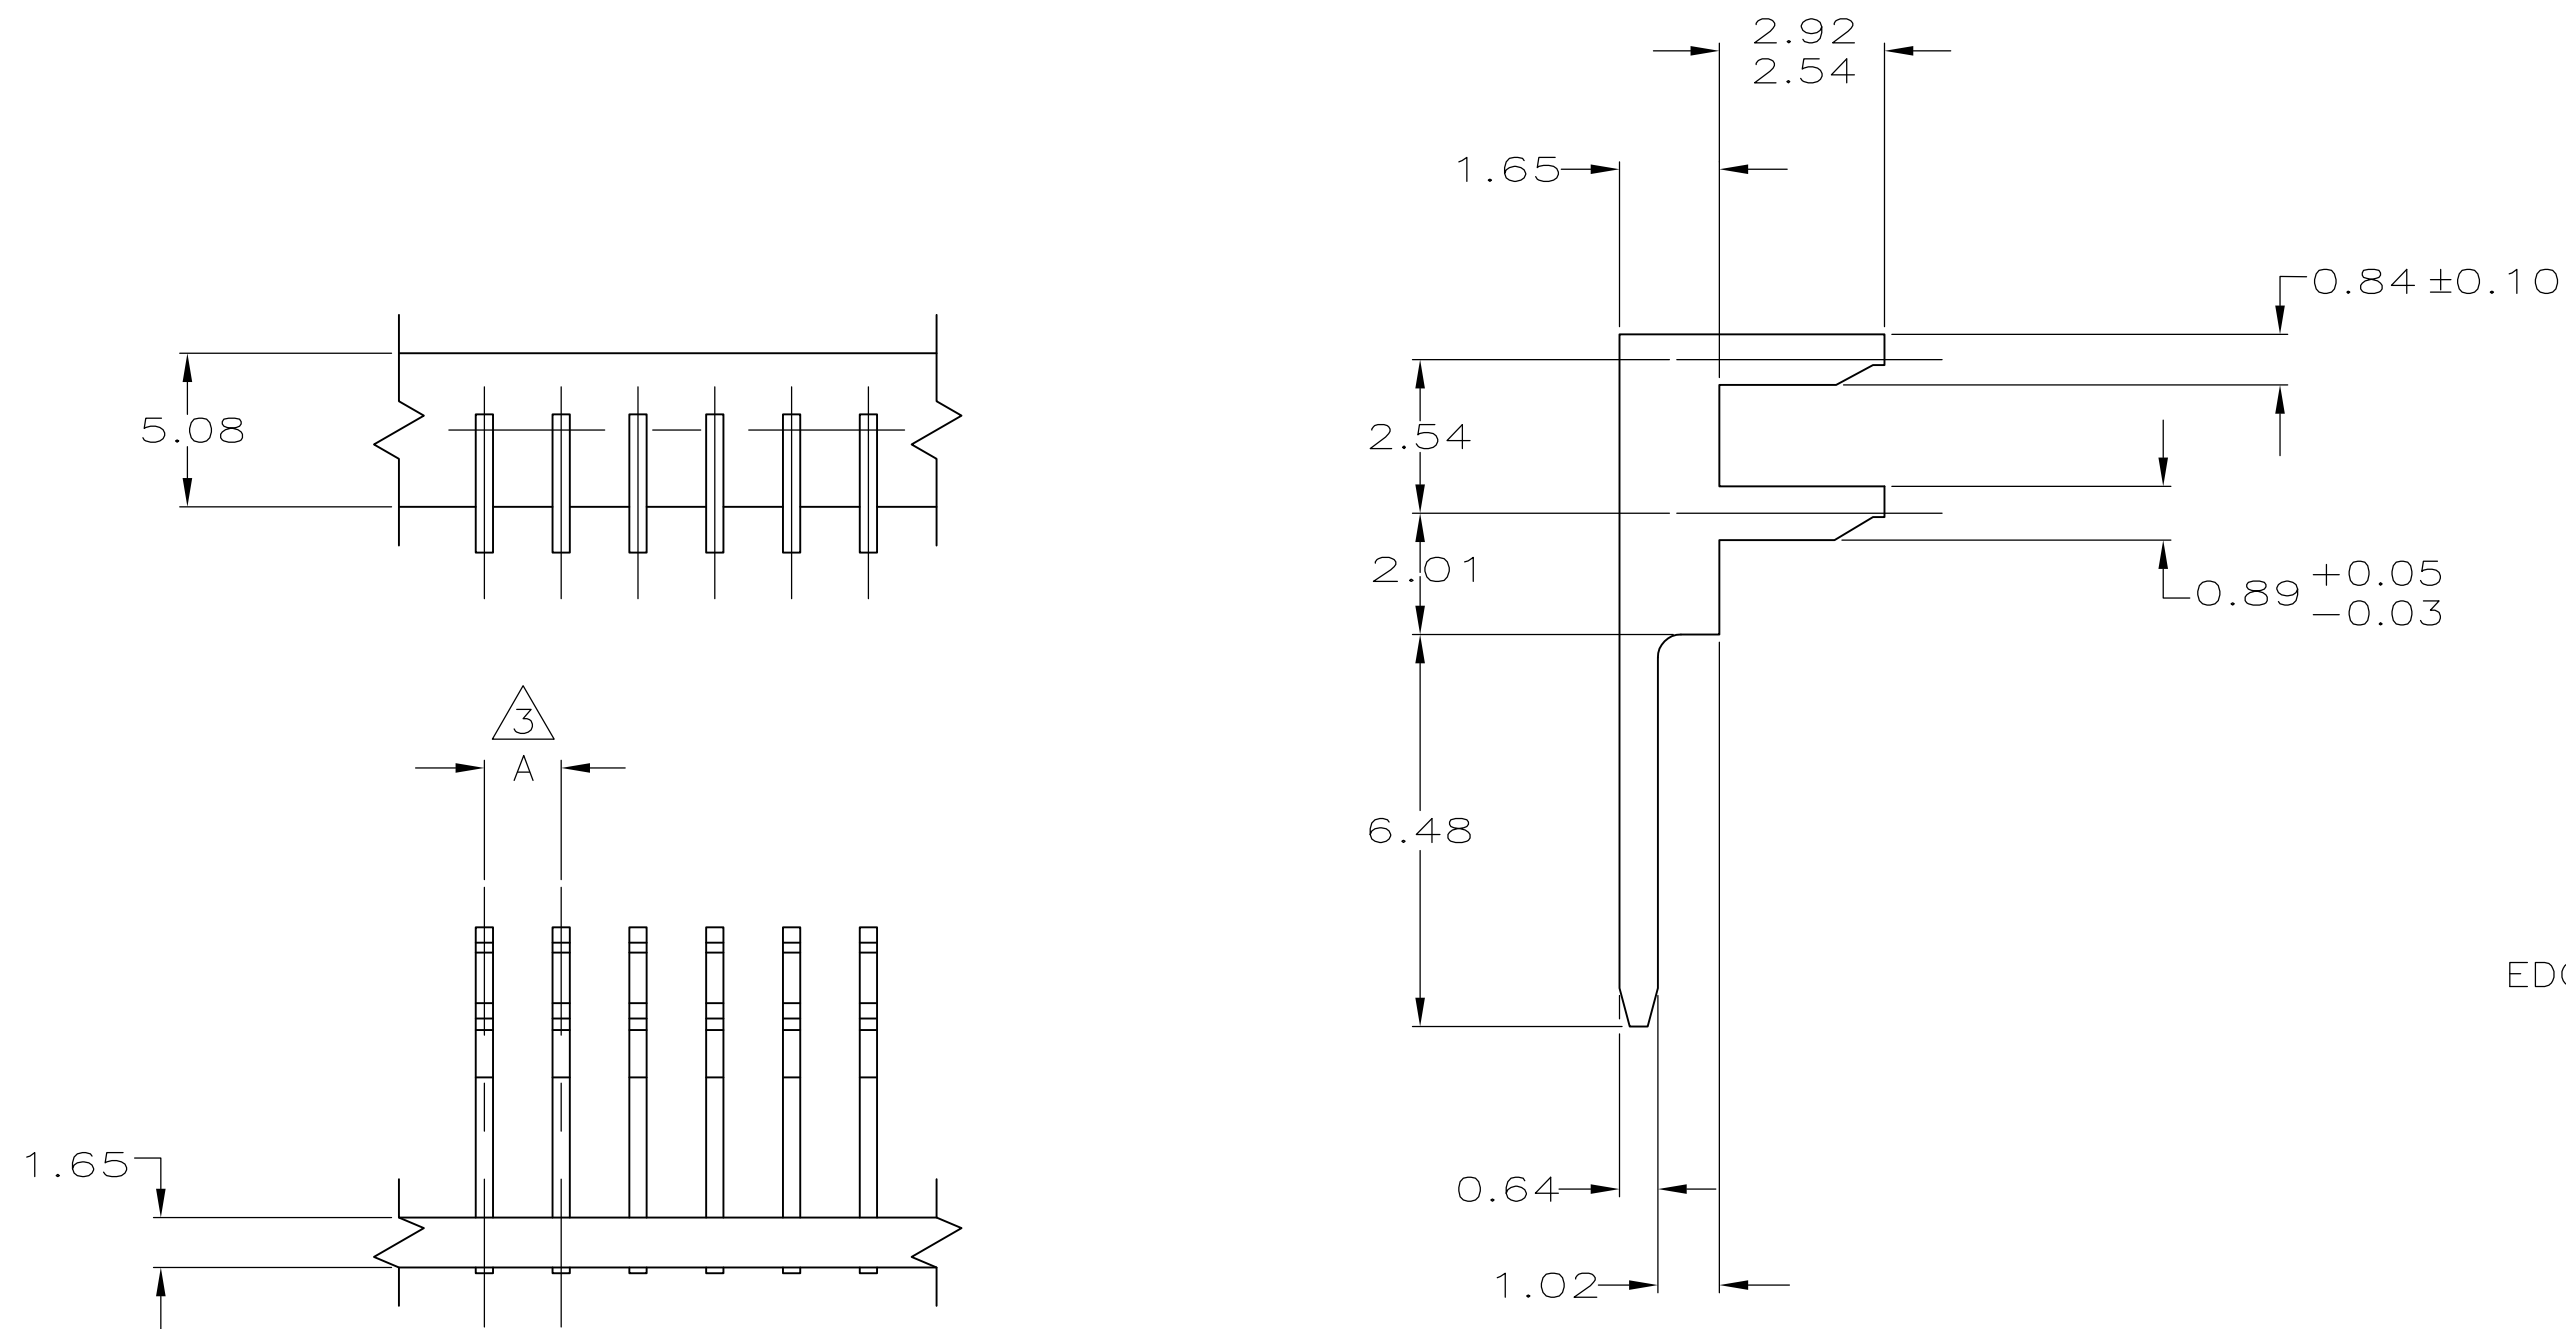


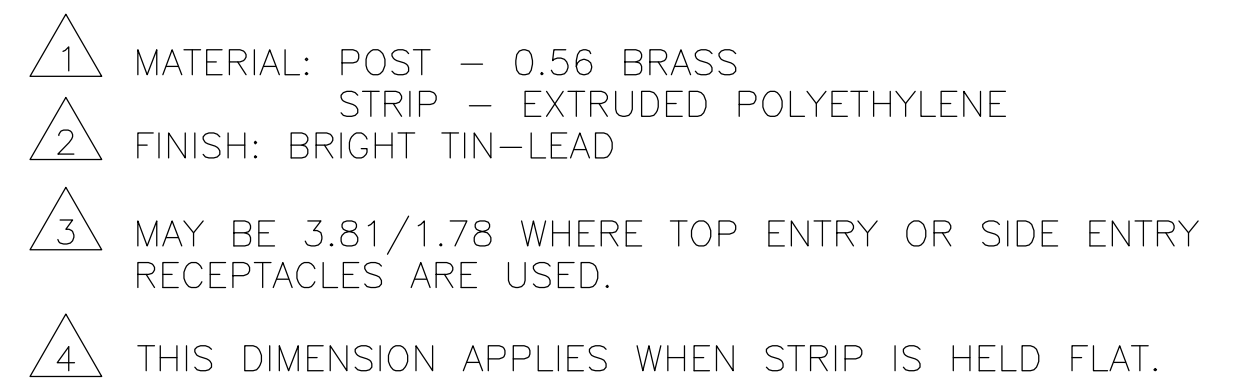

RECOMMENDED MOUNTING PATTERN

0.94	.037	—	—
0.89	.035	6.48	.255
0.84	.033	5.08	.200
0.64	.025	3.81	.150
0.56	.022	2.92	.115
0.38	.015	2.54	.100
0.25	.010	2.03	.080
0.13	.005	2.01	.079
0.10	.004	1.78	.070
0.05	.002	1.65	.065
0.03	.001	1.02	.040
MM	IN	MM	IN
CONVERSION TABLE			

OBSOLETE	2,500	2.54	1-380953-2
	30,000	3.81	1-380953-1
	30,000	2.54	1-380953-0
	QUANTITY PER REEL	A	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. VESTAL 2-10-94		 TE Connectivity				
		CHK R. SWING 2-10-94						
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME				
		APVD F. BEILES 2-10-94		F POST, STRIP, C.I.S.				
		PRODUCT SPEC —						
		APPLICATION SPEC —						
		—						
MATERIAL	FINISH	WEIGHT —		SIZE A2	CAGE CODE 00779	DRAWING NO C-380953	RESTRICTED TO —	
		CUSTOMER DRAWING				SCALE 4:1	SHEET 1 OF 1	REV K2

METRIC