


AC Adapter 12VDC/500mA

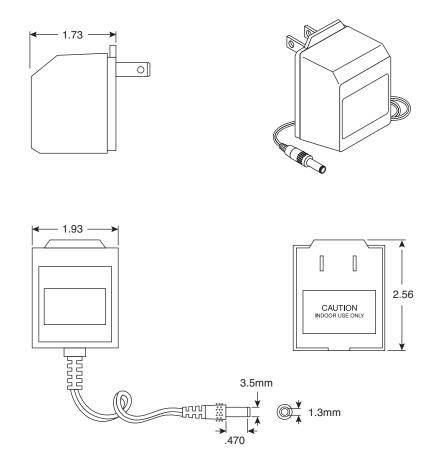

Dimensions: in. (except where noted)

■ SPECIFICATIONS:

• Primary voltage: 120VAC 60Hz 15W

• Exciting current, open circuit: 120mA max.

• DC resistance \pm 10%: 125 Ω

Secondary, no load voltage: 17.7VDCLoaded voltage: 12VDC @ 500mA

• DC resistance \pm 10%: 1Ω

• Insulation resistance: $100M\Omega$ @ 500VDC

• Dielectric strength: primary-secondary: 1,500VAC for 1 minute

primary-core: 1,500VAC for 1 minute secondary-core: 500VAC for 1 minute

• Temperature rise: 65°C max. @ rated load

• Cord length: 6ft.

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Xicon:

412-112055